

SILO X10 – model: 2010

Monopoint Luminaire

WAC LIGHTING

Responsible Lighting®




Fixture Type:

Catalog Number:

Project:

Location:

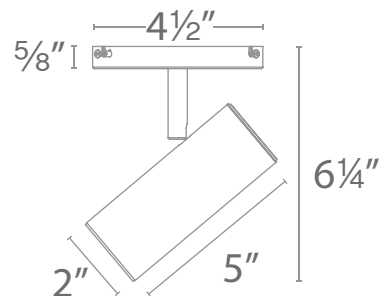

PRODUCT DESCRIPTION

Silo offers superior light output in a small, sleek design. Engineered synthesis of driver, single point source LED, optical and thermal management in a slender diecast housing. Ideal for residential, retail and lower mounting height commercial applications.

FEATURES

- 35° TIR lens pre-installed. 25° TIR lens included
- Integral driver and high output COB LED
- Outperforms halogen 65W MR16
- Accommodates one at lens accessory or one glare control accessory
- 350° horizontal and 90° vertical aiming
- 80,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

- Construction:** Die-cast aluminum with removable front cap for lenses or accessories
- Input:** 120-277V AC 50/60Hz
- Power:** 10W
- Light Source:** High output COB LED
- Dimming:** 100%-5% electronic low voltage (ELV) dimmer (120V only)
- Standards:** UL & cUL Listed, Energy Star®, CEC Title 24 Compliant
- Finish:** Powder coated

MONOPOINT

	Beam	Lumens	CBCP	Color Temp	CRI	Finish
MO-2010	25°	790	2575	930	3000K	90
	35°	790	1545			
						BK Black WT White

SUSPENDED Sold as a complete unit

X6	6"	MO	2010930	BK WT
X12	12"			
X18	18"			
X24	24"			
X36	36"			

MO-2010-930-__

Example: **MO-2010-930-BK**

X__-MO2010930-__

Example: **X12-MO2010930WT**

FLAT LENS

Amber	LENS-11-AMB
Blue	LENS-11-BLU
Green	LENS-11-GRN
Red	LENS-11-RED
Yellow	LENS-11-YEL

FLAT LENS

Frosted	LENS-11-FR
Spread	LENS-11-SPR
Beam elongating	LENS-11-BEL

GLARE CONTROL

Cross louver - white	LENS-11P-CRL-BK
Cross louver - black	LENS-11P-CRL-WT
Snoot - white	LENS-11-SNOOT-BK
Snoot - black	LENS-11-SNOOT-WT

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585