


### Features

- Acrylic
- Left or right drain
- 120 BubbleMassage™ airjets
- Blower motor with 300 W heater, electronic user control, and grounding-type plug-in cord
- Textured bottom surface
- UL listed
- Optional K-1491 removable bath pillow
- Optional K-1601 removable footstop
- Optional K-1283 removable apron
- Drop-in [-G] or 3-side integral flange [-GLF, -GRF]
- 72" (1829 mm) x 36" (914 mm) x 20" (508 mm)

### 6' BUBBLEMASSAGE™ BATH K-1257-G ALSO K-1257-GLF, K-1257-GRF

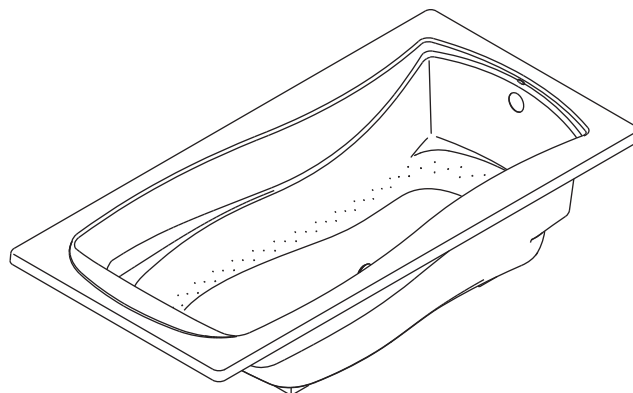

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- UL 1795
- CSA B45.5/IAPMO Z124
- ASME A112.19.7

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable

### Specified Model

| Model      | Description                                              | Colors/Finishes            |                                     |
|------------|----------------------------------------------------------|----------------------------|-------------------------------------|
| K-1257-G   | Bubblemassage bath – drop-in                             | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ |
| K-1257-GLF | Bubblemassage bath – 3-side integral flange, left drain  | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ |
| K-1257-GRF | Bubblemassage bath – 3-side integral flange, right drain | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ |

#### Recommended Accessories

|           |                         |                             |                             |                                     |
|-----------|-------------------------|-----------------------------|-----------------------------|-------------------------------------|
| K-7166-AF | Adjustable pop-up drain | <input type="checkbox"/> CP | <input type="checkbox"/> PB | <input type="checkbox"/> Other_____ |
|-----------|-------------------------|-----------------------------|-----------------------------|-------------------------------------|

#### Optional Accessories

|        |                                |                            |                                     |                             |
|--------|--------------------------------|----------------------------|-------------------------------------|-----------------------------|
| K-1283 | Removable apron                | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ |                             |
| K-1446 | Remote blower installation kit |                            |                                     | <input type="checkbox"/> NA |
| K-1491 | Removable pillow               | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ |                             |
| K-1601 | Removable footstop             | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ |                             |

### Product Specification

The acrylic Bubblemassage bath shall be 72" (1829 mm) in length, 36" (914 mm) in width, and 20" (508 mm) in height. Bath shall be for drop-in [-G] or 3-side integral flange [-GLF, -GRF]. Bath shall have a blower motor with 300 W heater, electronic user control, and blower motor with grounding-type plug-in cord. Bath shall feature a textured bottom surface, 120 Bubblemassage airjets, and left or right drain. Bath shall have an optional K-1601 removable footstop, K-1283 removable apron, and K-1491 removable bath pillow available. Bath shall be UL listed. The Bubblemassage bath shall be Kohler Model K-1257-\_\_\_\_-\_\_\_\_.

**MARIPOSA®**

## Technical Information

|                                                 |        |                              |    |   |
|-------------------------------------------------|--------|------------------------------|----|---|
| Fixture*:                                       |        |                              |    |   |
| Basin area:                                     |        |                              |    |   |
| Bathing well                                    |        | 50" (1270 mm) x 24" (610 mm) |    |   |
| Top area                                        |        | 65" (1651 mm) x 27" (686 mm) |    |   |
| Weight                                          |        | 102 lbs (47.2 kg)            |    |   |
| To overflow:                                    |        |                              |    |   |
| Water depth                                     |        | 14" (356 mm)                 |    |   |
| Capacity                                        |        | 72 gal (272.5 L)             |    |   |
| * Approximate measurements for comparison only. |        |                              |    |   |
| Drop-in cut-out                                 |        | 70" (1778 mm) x 34" (864 mm) |    |   |
| Blower motor:                                   | Heater | V                            | Hz | A |
|                                                 | 300 W  | 120                          | 60 | 5 |

## Required Electrical Service

|                                                                                             |                    |
|---------------------------------------------------------------------------------------------|--------------------|
| Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI): |                    |
| Blower motor:                                                                               | 120 V, 15 A, 60 Hz |
| Blower motor is supplied with a 24" (610 mm) grounding-type plug-in cord.                   |                    |

## Installation Notes

**NOTICE: If the blower motor and check valve are relocated**, two access panels are required. Locate one access panel at the blower motor/control location and the other at the control box. Locate the blower motor and check valve together.

Install this product according to the installation guide.


Floor support under the bath must provide for a minimum of 41 lbs/square foot (198 kg/square meter) loading.

If used, the optional apron must be installed before the finished floor and wall materials are installed.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

No change in measurements with drain shown. (K-7166-AF or K-7166M-AF)

Recommended faucet area.

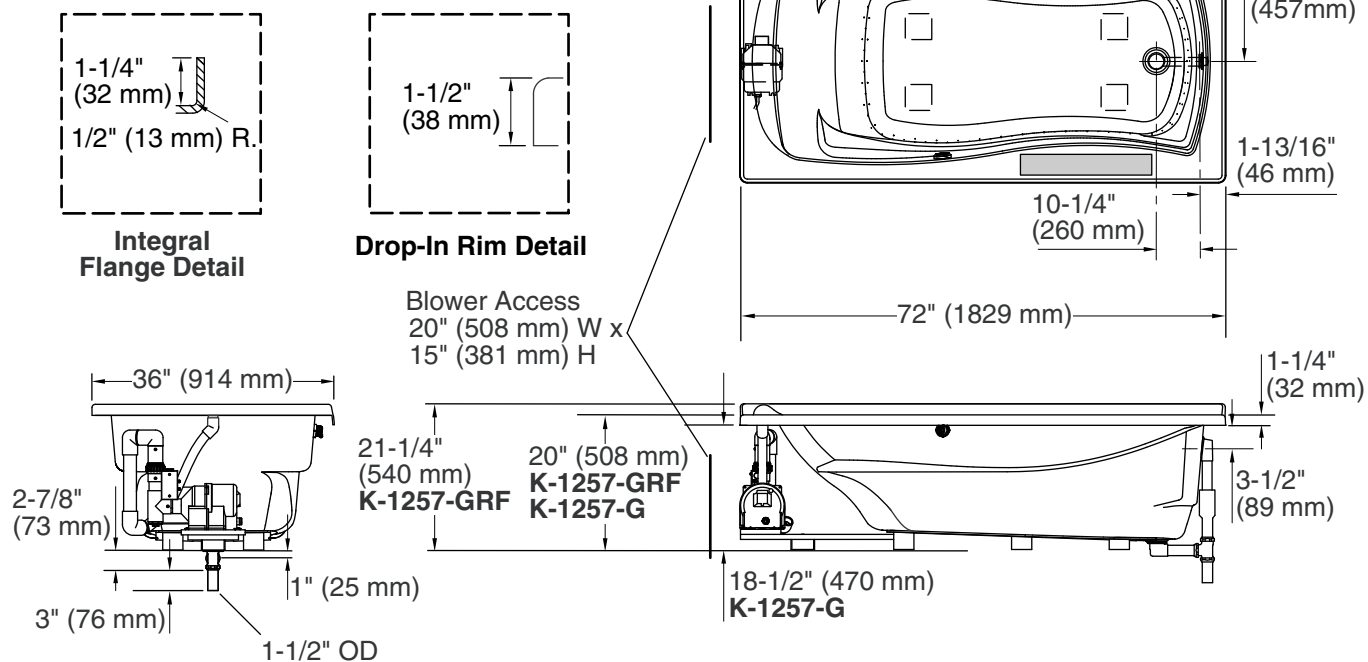

## Product Diagram