

FEATURES

- Close coupled 2-piece high efficiency toilet (HET). Combination elongated front bowl and tank, less seat.
- 12" (305mm) rough-in.
- Vitreous china.
- MaP™ Rated 1000 Gram Flush
- High efficiency (1.0 gpf/3.8 Lpf).
- Gravity feed, siphon action bowl.
- 2" fully-glazed trapway.
- Wide 3" flush valve.
- 15" rim height.
- Color-matched trip lever.
- 2 color-matched bolt caps.
- 5 Year Limited Residential Warranty / 1 Year Commercial Warranty
- Meets strict flushing performance criterion established by the EPA (Environmental Protection Agency) WaterSense program
- High efficiency toilets use at least 20% less water than standard 1.6 GPF toilets
- This product can help a building earn Water Efficiency points in the LEED Green Building Rating System™

**1000
gram
MaP**



TOILETS/LAVS

COLORS


- White
- Biscuit

Specified Model

	MODEL NO.	DESCRIPTION	Length	Width	Height
COMPLETE TOILET KIT					
☐	TBT-1565	Elongated Bowl & Tank	28"	18 $\frac{1}{8}$ "	30 $\frac{1}{3}$ "
INDIVIDUAL COMPONENTS					
☐	TB-1565	Elongated Front Bowl	28"	14"	15 $\frac{1}{8}$ "
☐	TT-1560	Toilet Tank - LH Trip Lever	8 $\frac{1}{2}$ "	18 $\frac{1}{8}$ "	15 $\frac{1}{8}$ "

To Be Specified: Color (see below)

☐	01 White
☐	08 Biscuit

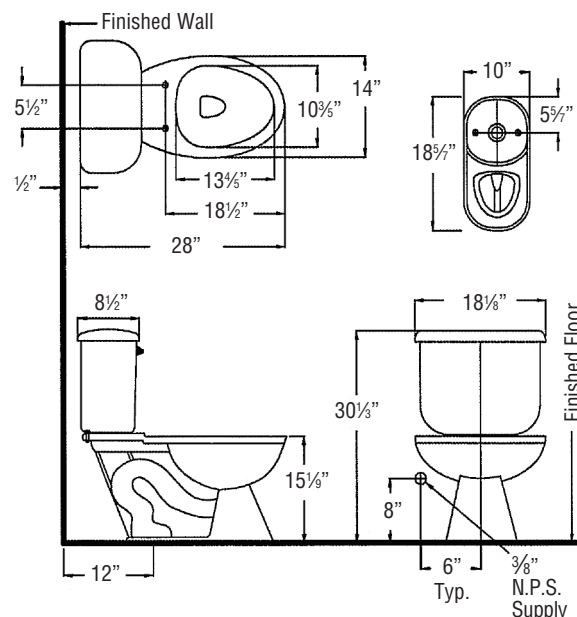

Compliance Certifications - Meets or Exceeds the Following Specifications

- ASME A112.19.2M-2008/CSA B45.1-2008
- UPC®, National Plumbing Code of Canada, IPC & IRC
- EPA Water Sense Tank-Type High Efficiency Toilet Specs

This toilet is designed to rough-in at a minimum dimension of 305mm (12") from finished wall to C/L of outlet. Supply not included with fixture and must be ordered separately.

Dimensions are nominal and are subject to change without prior notice. Dimension shown for location of supply is suggested. For additional information refer to installation instructions supplied.