

WARNING

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.
















CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS


- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced
- If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire Connector		3X	I	Canopy Nut		1X
B	Mounting Plate		1X	J	Socket Assembly		1X
C	Ground Screw		1X	K	Shade		1X
D	Mounting Screw		2X	L	Socket Ring		1X
E	Hang Loop		1X	M	Bulb		1X
F	Closable Link		2X	N	Glass Panel		1X
G	Canopy		1X	O	Screws		3X
H	Chain		1X	P	Steel ring		1X

Owner Manual


Product Dimensions: 11.75"Lx11.75"W x 14-73"H

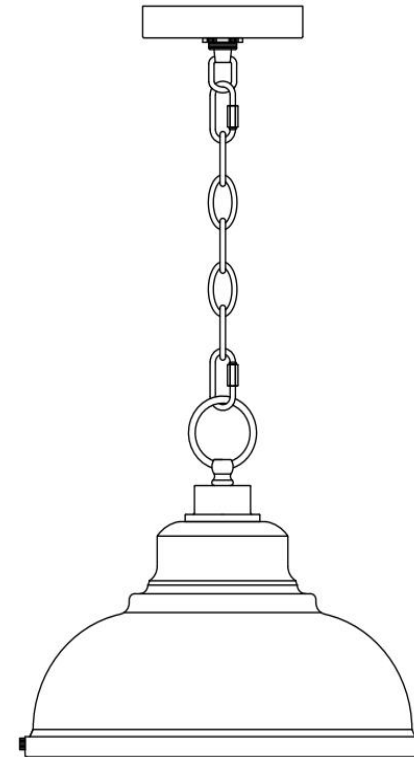


PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help.

NOTE: PLEASE USE TYPE "A" BULB MAX 60-WATT OR LED BULB MAX 9-WATT, THERE IS LED 4-WATT BULB IN THE BOX

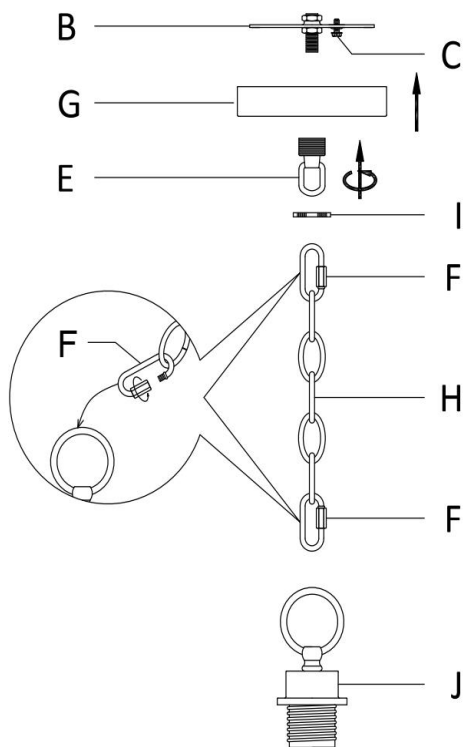



Step 1: Unpack all parts from cartons carefully. Place the Canopy (G) onto the Hanging Loop (E). Place the nipple of Mounting Plate (B) into the threaded portion of the Hanging Loop (D) and fix it by turning the Canopy Nut (I) clockwise till tight. Use Closable Link (F) attach the Chain (H) ends onto the fixture loop of Socket Assembly (J) and the Hanging Loop (E).

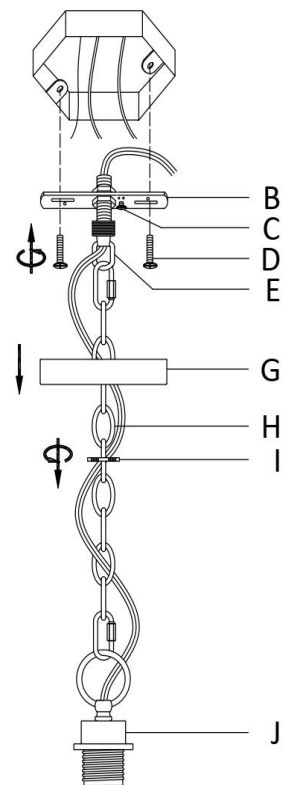

Step 2: Separate the Mounting Plate (B) from the Canopy (G) by turning the Canopy Nut (I) anti-clockwise. Install the Mounting Plate (B) to the junction box with Mounting Screw (D). Gently cord and ground wire through Canopy Nut (I) and Canopy (G), then through Chain (H) about every third link. Next, carefully thread cord and ground wire through hole in Canopy Loop (E) and pull into Junction Box in preparation for electrical connection in next step. Permit cord and wire to hang freely next to Chain.

PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help.

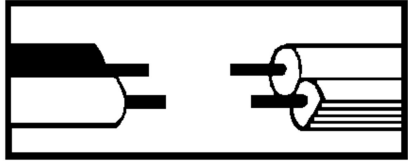


Step 3: Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire connector (A).

Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire connector (A).


Grounding Instructions:

Wrap ground wire from outlet box around green ground screw(C) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector (A).

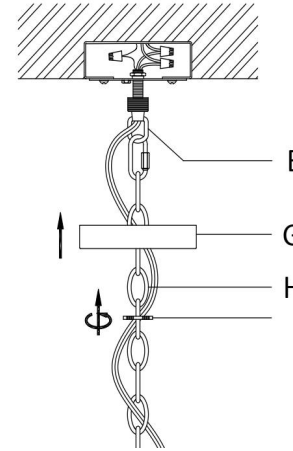


Step 4: Tuck wires inside junction box.

Attach the Canopy(H) to the junction box and fix it by turning the Canopy Nut(F) clockwise.

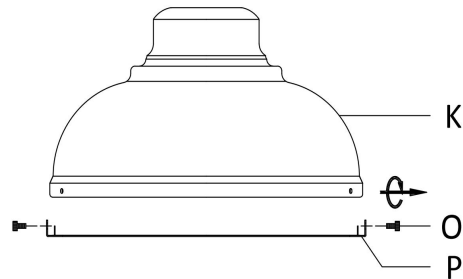

Step 5: Separate the Steel Ring (P) from the Shade (K) by turning the Screws (O) anti-clockwise.

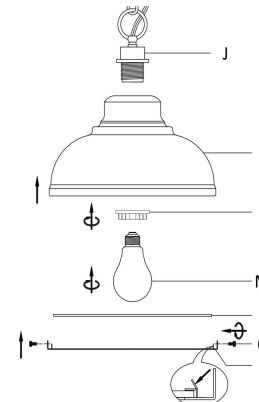

Step 6: Place the Shade (K) over the socket, the secure with the Socket Ring (L).

Insert the Bulb (M) into the socket.

Insert the Glass Panel (N) to the Steel Ring (P), fix it with small plate of the Steel Ring (P) inside.

Attach the Steel ring (P) to the Shade (E) and then fixed using the Screws(O).