



ASSEMBLY INSTRUCTION


①	light arm 1pcs	②	② socket ring	④	④ lock nut & teeth lock washer	⑧	hex key 1pcs	⑪	cap connector 3pcs	X 3pcs
③	light arm 1pcs	⑤	⑤ metal tube	⑥	⑥ canopy	⑨	screw 4pcs	X 1pcs	X 3pcs	X 3pcs
⑦	cap nut	⑩	glass lampshade 3pcs	X 1pcs	X 3pcs	X 1pcs	X 3pcs	X 1pcs	X 3pcs	X 3pcs

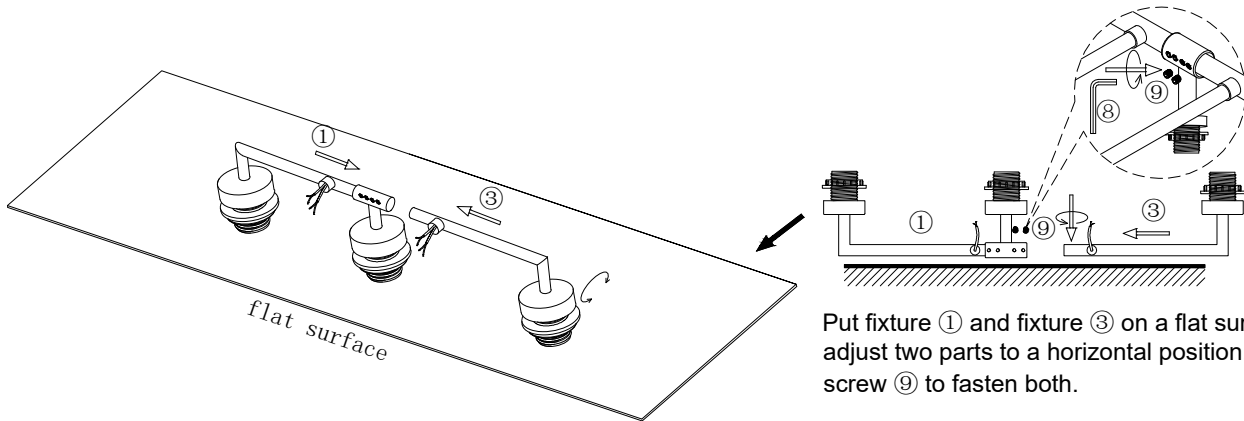

1. Insert the fixture ③ into fixture ①, adjust two parts straight and fasten it with grub screw ⑨ by rotate hex key ⑧.

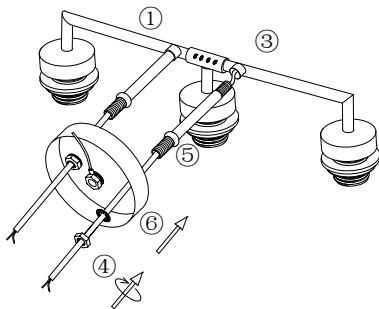

2. Let the wire of the fixture go through the tube ⑤, rotate to install the tube ⑤ to the fixture.
3. Install the fixture to the canopy ⑥ with lock nut & teeth lock washer ④.

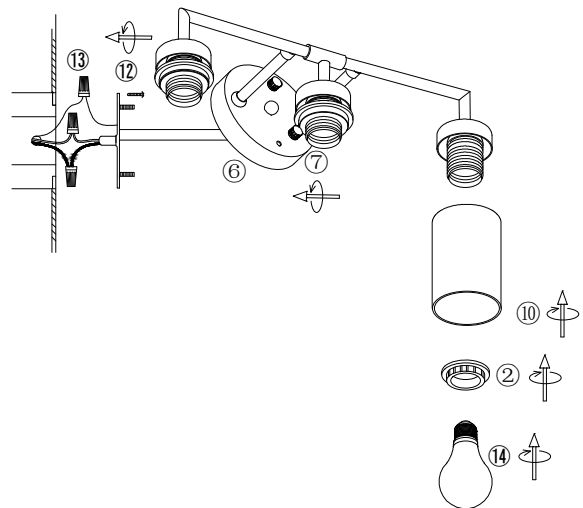

4. Install the bracket to the wall junction box with screw ⑫.
5. Connect the wire to your home line with cap connector ⑪.
6. Install the fixture to the bracket with cap nut ⑦.
7. Install the lampshade ⑩ to the bulbholder with socket ring ②, after that install the bulb ⑭.

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !