USE AND CARE GUIDE

CHAISE LOUNGE

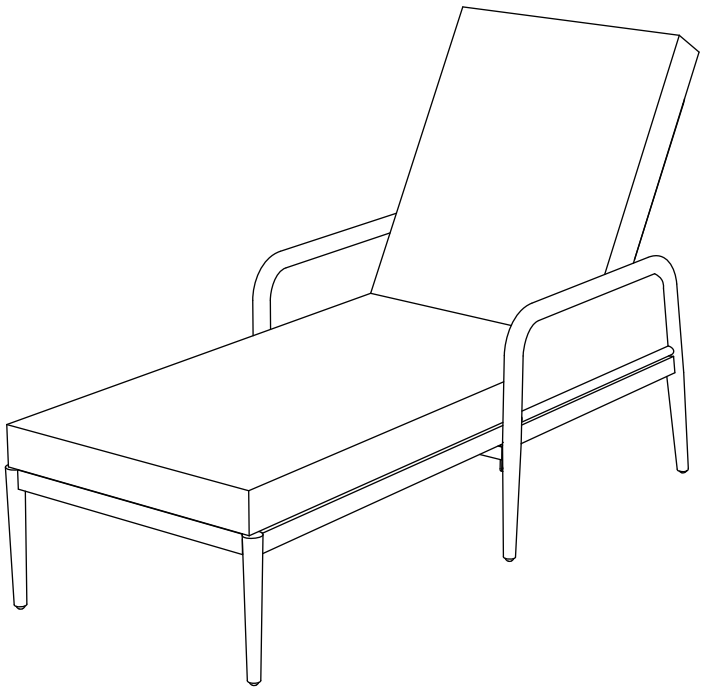


Table of Contents

Table of Contents 2
Safety Information 2
Warranty 2
Pre-Assembly 3
Planning Assembly. 3
Hardware Included. 3
Lounge Package Contents 4
Assembly. 5
Care and Cleaning 6

Important Safety Instructions

SAVE THESE INSTRUCTIONS

READ ALL INSTRUCTIONS BEFORE USE

To reduce the risk of injury to persons:

- □ Close supervision is necessary when this furnishing is used by or near children, or disabled persons, if applicable.
- □ Use this furnishing only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.



CAUTION: Read all of the instructions in this manual before you begin assembly. Failure to do so may result in faulty assembly and potential injury!

Warranty

1YEAR WARRANTY

Pre-Assembly

PLANNING ASSEMBLY


Please read this entire instruction manual prior to assembly.

Identify all parts packed in the carton against the parts list. Remove all protective materials and place the parts on a non-abrasive surface to avoid scratching.

NOTE: More than one person may be required to assemble this product.

HARDWARE INCLUDED

NOTE: Hardware not shown to actual size.

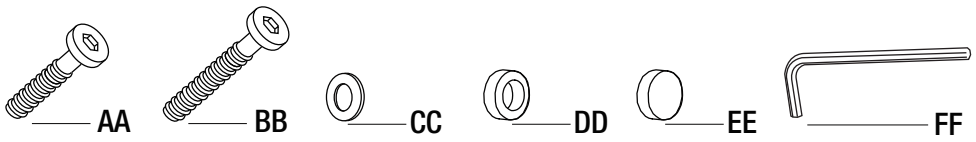


Part	Description	Quantity
AA	M6x15 Bolt	2
BB	M6x40 Bolt	6
CC	Washer	8
DD	Plastic Washer	2
EE	Bolt Cap	8
FF	Hex Wrench	1

Pre-Assembly (continued)

CHAISE LOUNGE PACKAGE CONTENTS

IMPORTANT: Do not fully tighten bolts/screws until all pieces are loosely assembled.

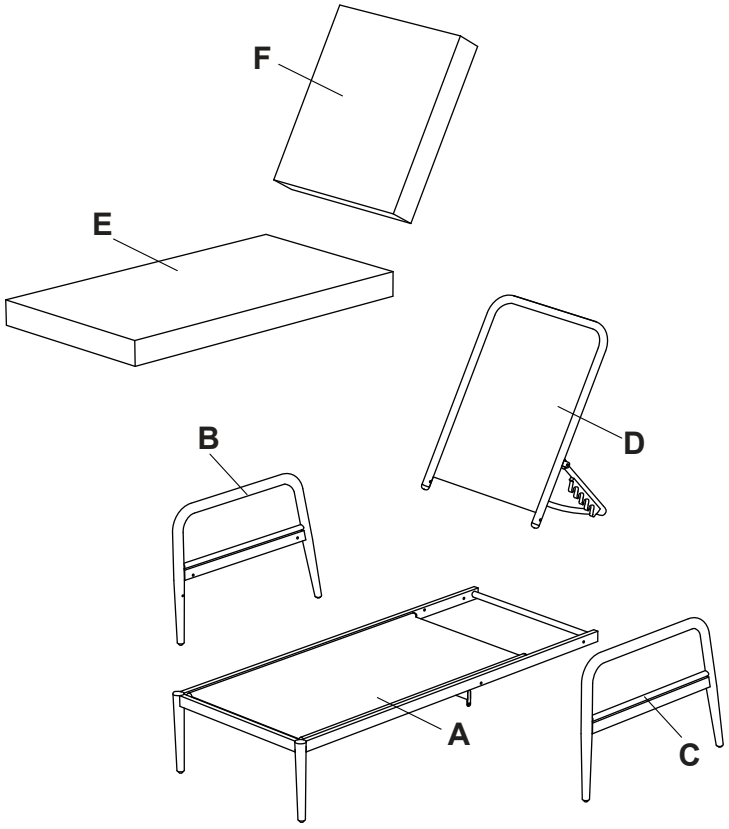


Part	Description	Quantity
A	Lounge seat	1
B	Right arm	1
C	Left arm	1
D	Lounge back	1
E	Seat cushion	1
F	Back cushion	1

Assembly

1 Attach the arms to the lounge seat

□ Attach the right arm (B) and left arm (C) to the seat (A) using M6 bolts (AA and BB) and washers (CC).


NOTE: Please ensure all the bolts are assembled correctly and use the hex wrench (FF) to tighten. Do not fully tighten bolts/screws until all pieces are loosely assembled. Add corresponding plastic caps (EE) after final assembly finished.

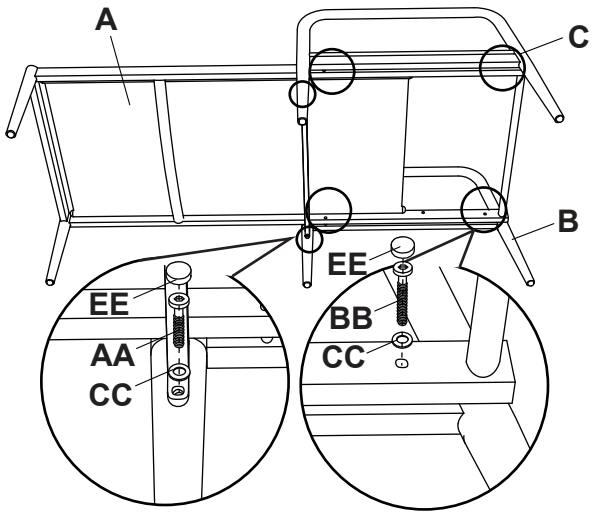

2 Attach the lounge back to the seat


□ Attach the lounge back (D) to the seat (A) using M6 bolts (BB) and washers (CC).

NOTE: Please ensure all the bolts are assembled correctly and use the hex wrench (FF) to tighten. Do not fully tighten bolts/screws until all pieces are loosely assembled. Add corresponding plastic caps (EE) after final assembly finished.

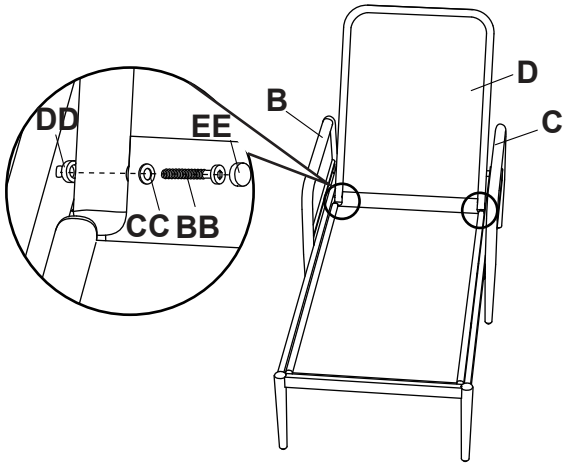

3 Attach the cushions

□ Attach the seat cushion (E) and back cushion (F) to the lounge.

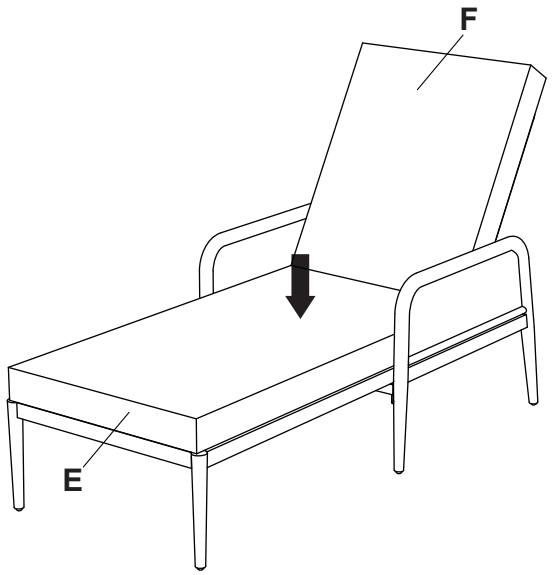

Care and Cleaning

- Do not allow water to build up in the frames. This will cause corrosion and possible freezing damage in cold climates.
- Use a mild soap and water for normal cleaning. Do not use janitorial or alcohol based cleaners. Some cleaners may be marked as natural, but some ingredients may cause discoloration or have an adverse reaction to your finish.
- Rinse with clean water and dry with a soft, absorbent cloth towel.
- Treat the frames with a liquid wax for maximum protection against UV rays and/or salty, damp air.