

4072LUL

LED-UL



Line: Wave
Family: Wall
Description: Wall Wave



Material: Natural Wood Veneer, MDF and acrylic
Weight:

Integrated LED Module 1 UNIT Driver, housed in the luminaire
Dimmable, 0-10V dimming

Color Temperature: 2700K, 3000K, 3500K or 4000K
CRI: 90
Luminous Flux: 5000lm
Total Power: 32W

Input Voltage: 110V - 277V
Input Frequency: 60 Hz
Isolation: Class II

Height Adjustment Limit: Not Applicable

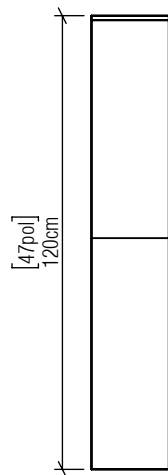

	01 Pine		25 Iridescent White
	02 Matte Black		26 Light Pink
	04 Tobacco		27 Gold
	06 Imbuia		28 Silver
	07 White		29 Teal
	09 Louro Freijó		30 Olive Green
	12 Teak		31 Ferrari Red
	13 Bluish Green		32 Copper
	15 Cappuccino		33 Bronze
	18 American Walnut		34 Maple
	22 Glossy Black		36 Emerald Green
	24 Marsala		37 Coral

WARNING!




Be sure electrical power is OFF before and during installation or maintenance.
The luminaire must be installed by a qualified electrician, in accordance with all applicable local codes.

Ensure that the rated luminaire voltage requirements are compatible with the available mains supply in which it will be installed.
All LEDs are included in your lamp. Never touch the LED surface with your bare hands as this may reduce the life of your LED.
Do not alter, relocate or remove any electrical component.

Line: Wave
Family: Wall
Description: Wall Wave

Material: Natural Wood Veneer, MDF and acrylic
Weight:

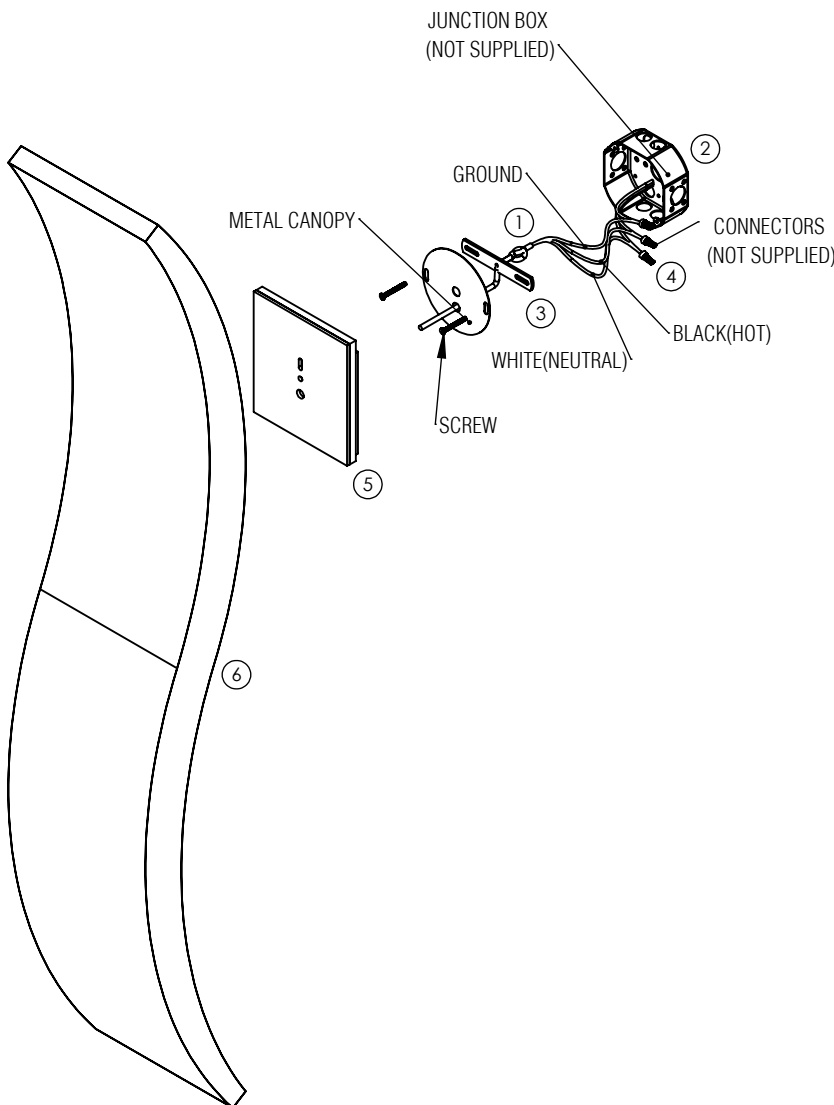

Turn OFF the power before start the installation.

MAKING ELECTRICAL CONNECTIONS

- ① Pass the power supply cable through the off-center hole on the base and crossbar.
- ② Connect the electrical supply wires to the junction box in accordance to all applicable local codes, as shown in the diagram.

MOUNTING ON THE FIXTURE

- ③ Attach the crossbar to the wall using the supplied screws.
- ④ After electrical connections are made, place excess wire inside of the junction box.
- ⑤ Fix the base to the wall using the supplied screw(s).
- ⑥ Bring the luminaire to the wall and leave it on top of the installed base until everything rests tight.

Turn ON electrical power.

Your luminaire is now ready for use.

ATTENTION!



FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE ACCIDENTS AND LOSS OF PRODUCT WARRANTY.
It's recommended to read these instructions completely and carefully before proceeding.

DIMMER COMPATIBILITY

The LED driver included with this fixture is designed to operate with most standard dimmers. All power ratings and installation instructions from dimmer manufacturers' instruction sheets must be followed.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

ACCORD Lighting guarantees coverage against manufacturing defects including electrical components and finishes, for a period of three years, under normal use, from the date of purchase. For warranty service, please contact your local dealer for further instructions. Proof of date of purchase will be required for validation of warranty service.

The responsibility of the manufacturer regarding the product warranty is related to the correct observation of the instructions contained in this manual. The manufacturer is not responsible for any damage to the product caused by accidents, alterations of any kind, improper usage or improper installation. See the website for additional warranty details.

ACCORD Lighting reserves the right to change the dimensions and specifications contained in this manual without prior notice, in accordance with its policy of continuous product improvement. Please, contact the manufacturer if additional information is necessary. The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details.