Installation Instruction

parts list			
	X2		X1
	X1		X1
	M8 X1		M8-50 X2
	M8-16 X6 Installed		M6-16 X4 Installed
	X15		X1
	M6 X1		M8 X1
	X4		
Step1:Check if the accessories are complete			

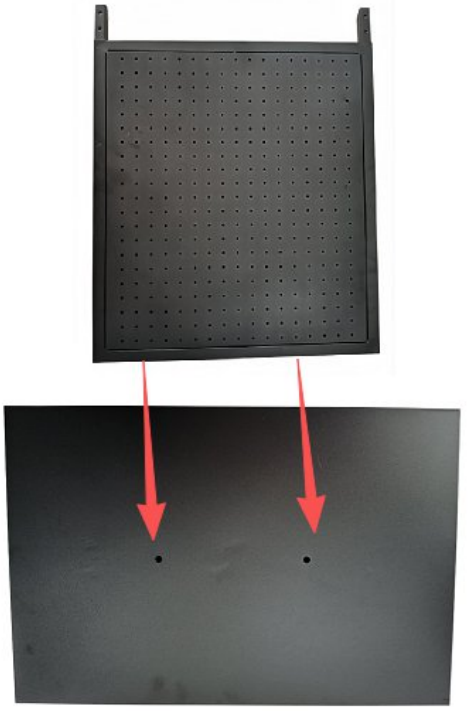



Step2 Remove the motherboard with the connector and connect it to the base plate. Secure the bottom with screws.



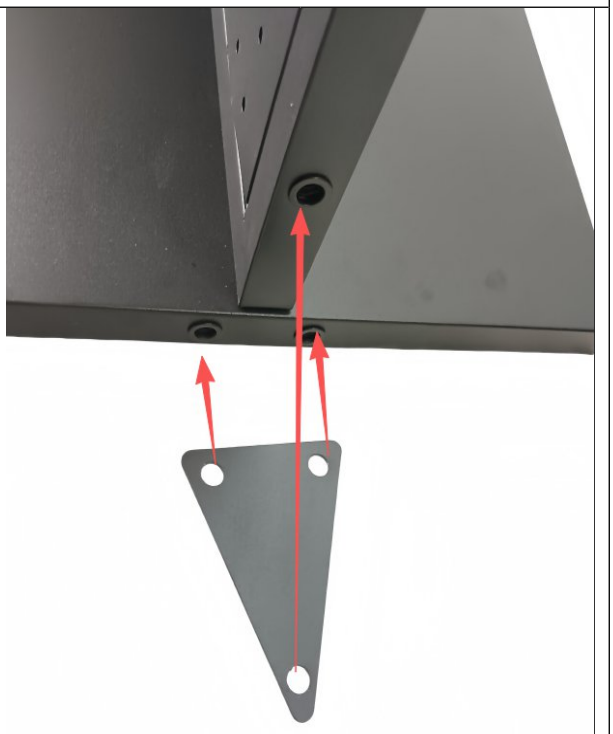

Step3 Install the triangular iron piece on the side and secure the bracket.



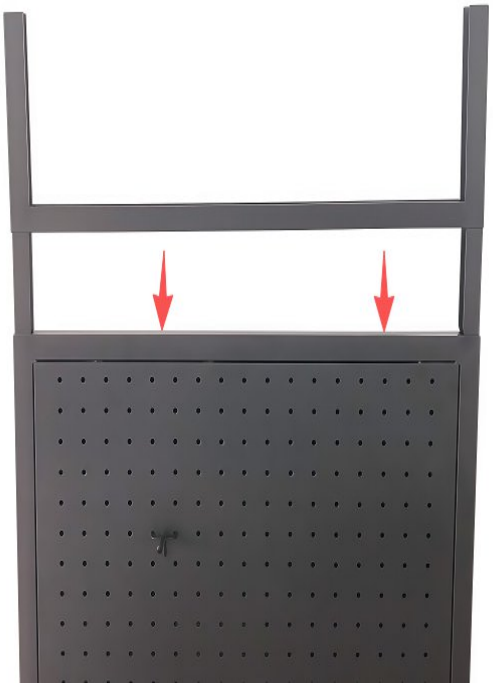

Step4 Place the upper layer of the motherboard onto it, and attach the topmost advertising card to the holder.



Step5 Finally, hangers are placed on the shelf, and the product installation is complete.