


END TABLE

Assembly Instructions

PO:

Top supports up to 25 lb.

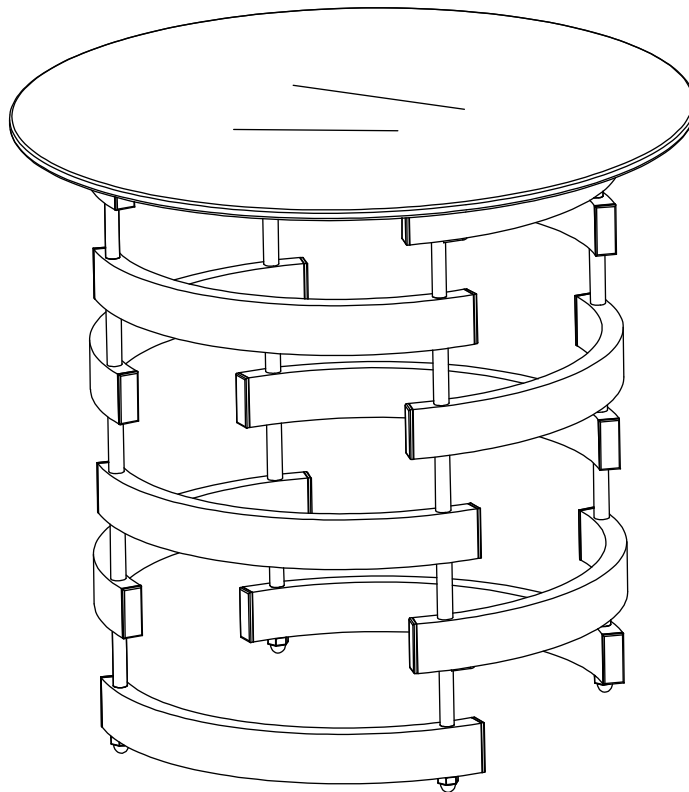

END TABLE







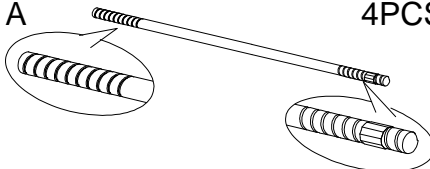






Parts List

Please review all parts and hardware before disposing of any packaging.

Call Customer Service if missing hardware.

Carefully study the diagrams below.


You may receive extra hardware with your unit.
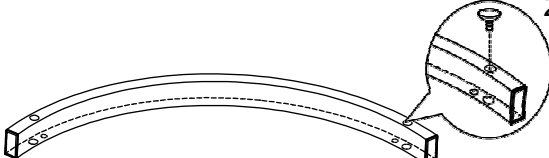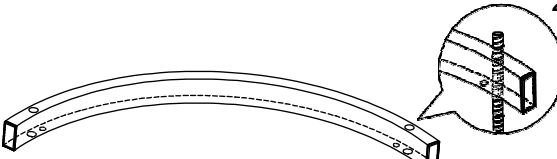
<p>1  2PCS</p> <p>Stretcher (1)</p>	<p>2  4 PCS</p> <p>Stretcher (2)</p>		
<p>3  2PCS</p> <p>Stretcher (3)</p>	<p>4  4PCS</p> <p>Stretcher (4)</p>		
<p>5  12PCS</p> <p>Connector Tube (58mm)</p>	<p>6  1PC</p> <p>Glass Top</p>		
<p>A  4PCS</p> <p>Long Bolt W/Stopper (495mm)</p>	<p>B  8PCS</p> <p>Bolt 3/16"X3/8"</p>	<p>C  4PCS</p> <p>Nut</p>	
<p>D  4PCS</p> <p>Glass Pad</p>	<p>E  1PC</p> <p>Open Wrench</p>	<p>F  1PC</p> <p>Allen Wrench</p>	<p>G  4PCS</p> <p>Plastic Cap</p>

Care and Cleaning Instructions:

Before using, wipe with a clean, dry cloth.
Avoid rubbing or scratching the surface with rough or abrasive objects.

Assembly Tool Required
No.2 Phillips Screwdriver



END TABLE

Assembly Instructions

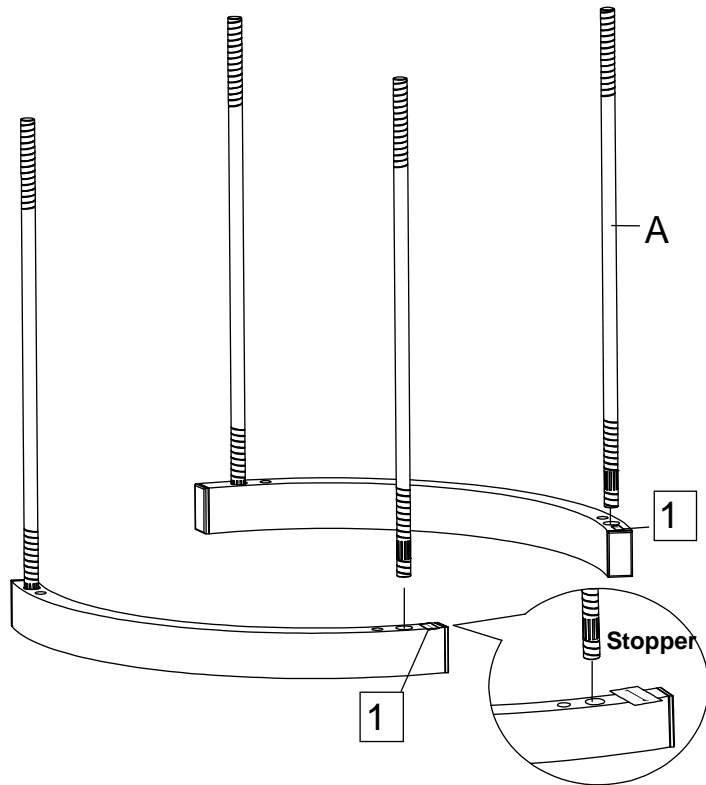


Figure 1

Step 1:

Screw Long Bolts (A) into corresponding holes on the bottom of Stretchers (1) as shown and tighten.

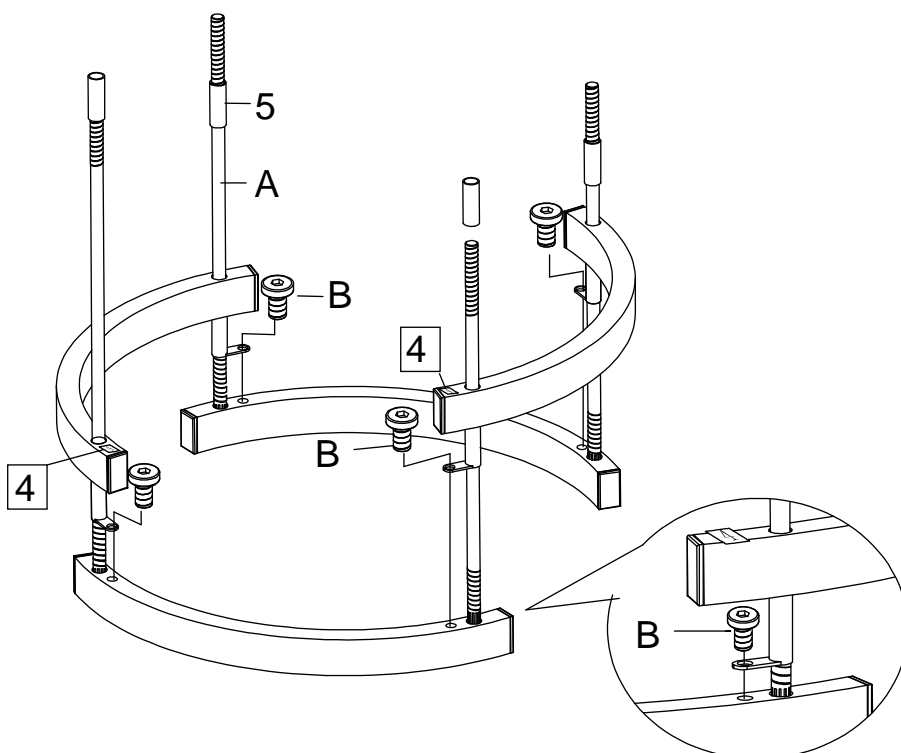


Figure 2

Step 2:

Insert attached Long Bolts (A) through the corresponding holes on Stretchers (4).

Secure Stretchers (4) to Stretchers (1) using Bolts (B), then follow with Connector Tubes (5) as shown.

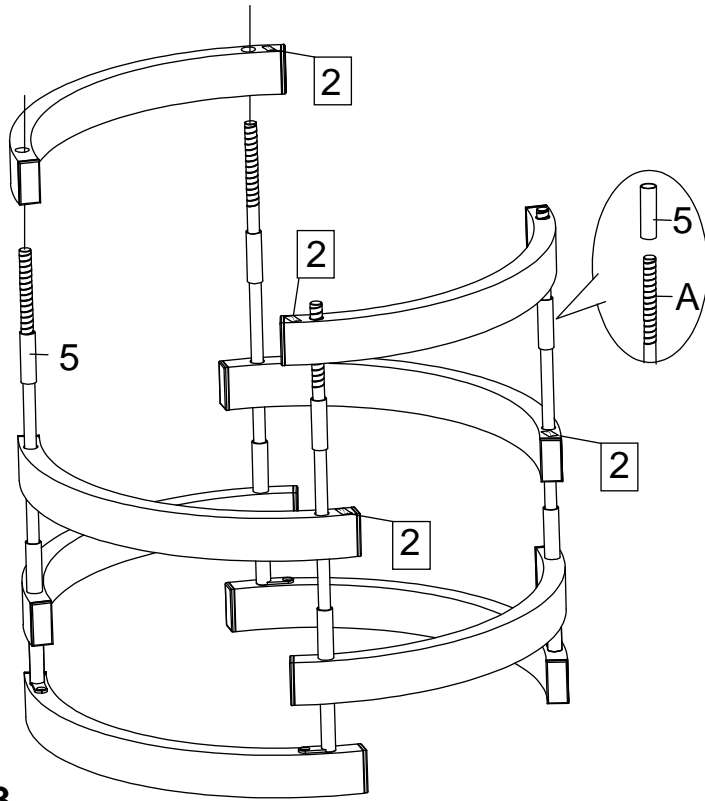


Figure 3

Step 3:

Attach Connector Tubes (5) to each Long Bolt (A) and follow with Stretchers (2).

Repeat step to add another level of Stretchers (2).

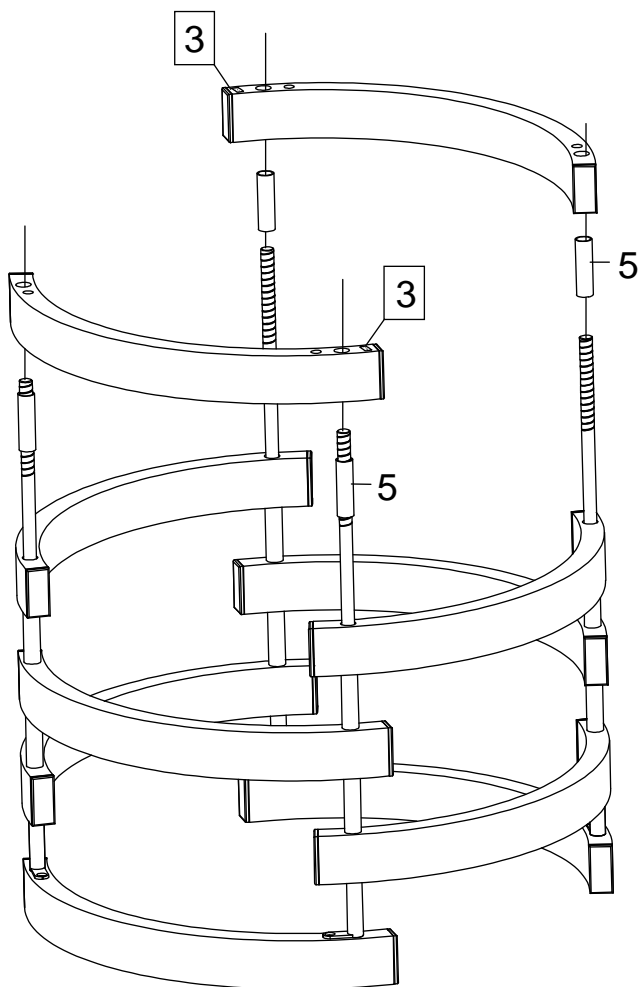


Figure 4

Step 4:

Attach Connector Tubes (5) to each Long Bolt (A) and add Stretchers (3).

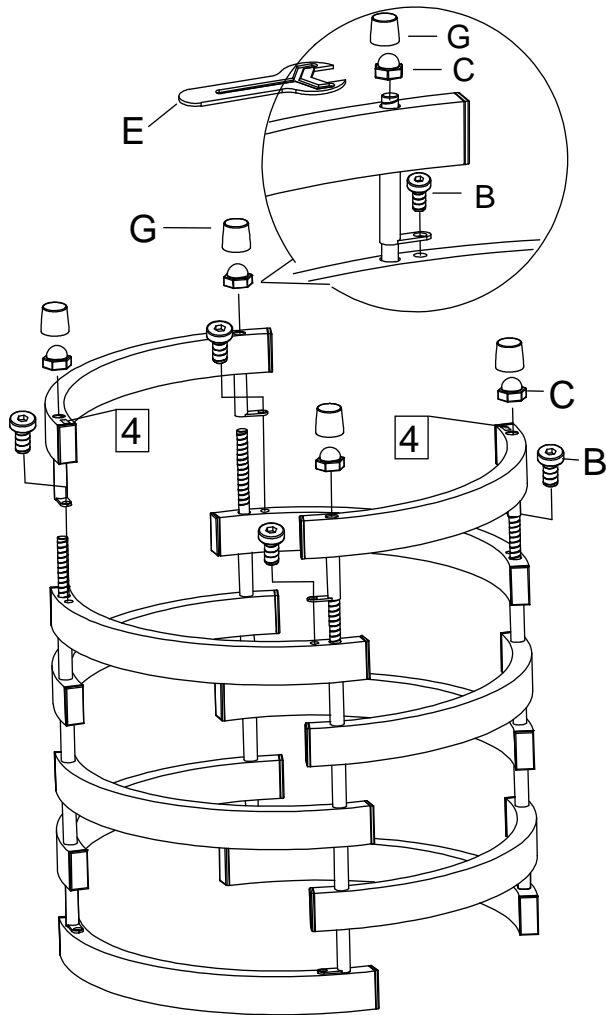


Figure 5

Step 5:

Attach Stretchers (4) to the frame using Bolts (B) as shown.

Tighten nuts (C) to fix the frame using Open Wrench (E).

Then, put plastic caps (G) on nuts (C).

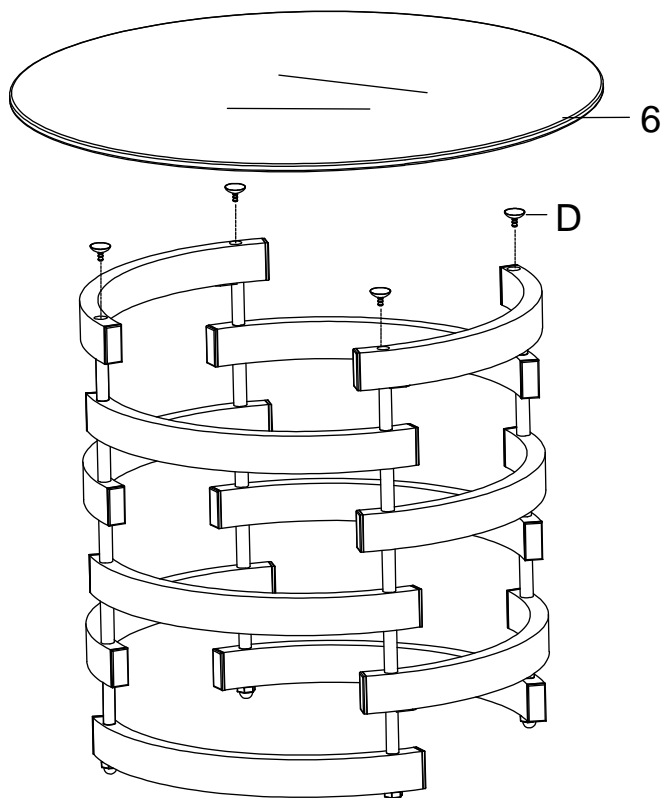


Figure 6

Step 6:

Turn the assembled frame upright and insert Glass Pads (D) into Stretchers (1) as shown, then place glass top (6).

Your end table is now complete.

Parts Replacement Form

Customer Information

Name

Address

City/State/Zip Code

Phone Number

Please indicate where you purchased this item: Store/Website/Catalog

Please indicate color/size/style number:

Style No

Parts Letter

Parts Description

Quantity Needed
