





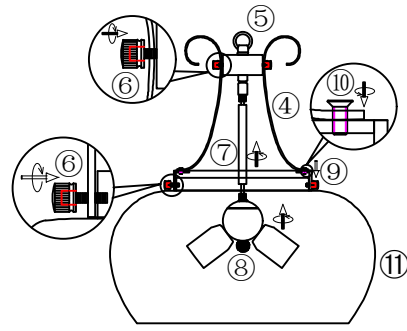
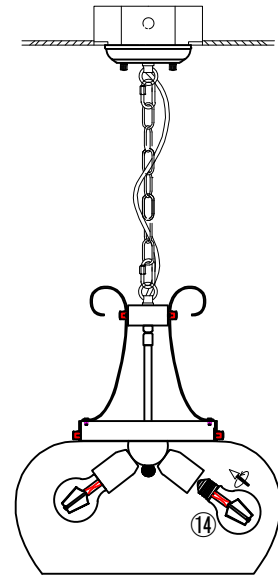
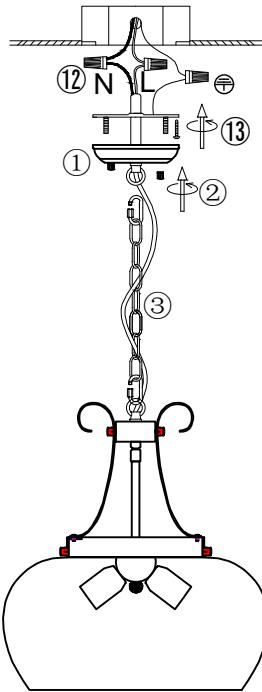


- | | | |
|--|--|--|
|  X 1PCS |  X 3PCS |  X 3PCS |
|  X 3PCS |  X 3PCS |  X 2PCS |



Please operate with gloves to avoid leaving stains on the lampshade.

1. Loosen to remove out the end cap (6) from metal ring (9), install the lampshade (11) to the ring (9) with end cap (6).
2. Install the profile (4) to the ring (9) with screw (10).
3. Install the profile (4) to the hanging box (5) with end cap (6).
4. Let the wire of the fixture (8) go through the hanging tube (7) and metal box (5), rotate to install both to the fixture.



5. Hang the fixture to the canopy (1) with chain (3), let the wire go through the chain (3) and canopy (1).
6. Install the bracket to the ceiling junction box with screw (13).
7. Connect the wire to the home line with cap connector (12).
8. Install the fixture to the bracket with cap nut (2).

9. Install the bulb (14).

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !