



## Installation steps:


1. Loosen the cylindrical nut (E), then move the flying saucer (F) up
2. Install the light source (bulb is not included in the package)
3. Put the incision piece (G) diagonally to the glass lampshade (H) and slowly put it in (glass is a fragile product, so please handle it with care)
4. The flying saucer (F) covers the glass lampshade (H) and locks it with the cylindrical nut (E).
- 5-6. Pass the flat tube (C) rubber pad (B) flat tube (A) through the power cord respectively, and then screw the straight tube (D) onto the flat tube (A)
7. Align the teeth on the bottom of the flat tube (A) with the teeth on the bottom of the flat tube (C) with the holes on the flat tube ring (I), and then lock with the iron piece (J).
8. Fix the hanging plate on the junction box with screws
9. Connect the main line of the lamp body with the reserved line on the junction box
10. Cover the junction box with the canopy, then tighten the ball nut

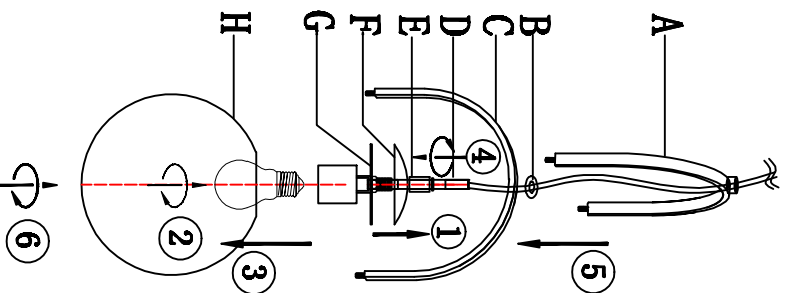


1

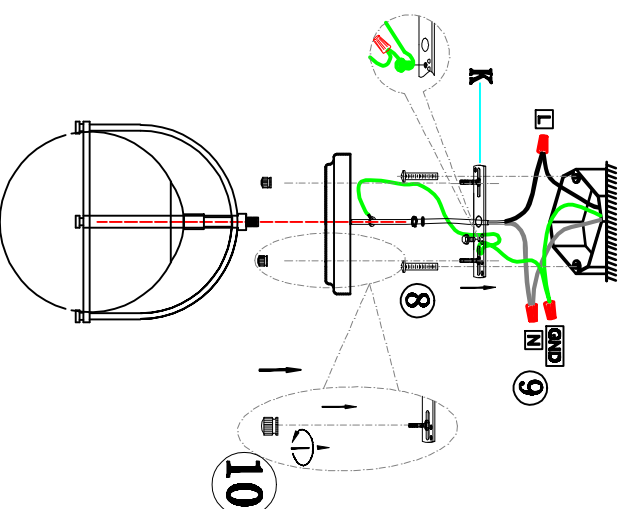

3

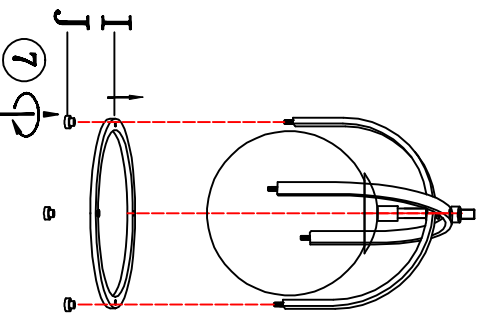

2



4

## Notice:

1. Before installation, please check whether the parts are complete and whether the lamps are in good condition.
2. Cut off the power supply before installation, and then perform wiring.
3. Install the lamp body first, and then install the power supply.
4. Installation and maintenance must be carried out by professional and technical personnel.