



Thank You for choosing our D'Vontz Stone Vessel Sink

We appreciate your choice of our product. All the information in this guide is based upon the latest product information available at the time of publication. We reserve the right to make changes in product specifications at any time without notice. Please take a few moments to review this guide, if you have any questions please contact us at 877-322-3600.



Items needed for Installation:

- A quality 100% clear silicone sealer.
- A non-overflow plumbing tailpiece drain designed for vessel sinks.
- Soft cotton rag.

Installation Guide:

NOTE: During the installation of this product, the only sealant or adhesive that is Manufacturer Approved is a 100% Silicone based product. Failure to use Kitchen and Bath 100% Silicone based products will VOID ALL manufacturer warranties and manufacturer finish warranties. Specifically, the use of Plumbers Putty is EXPRESSLY PROHIBITED and will VOID ALL manufacturer warranties and manufacturer finish

- Carefully remove your vessel from the packaging materials.
- Apply a small bead of silicone to the bottom side of the Vessel [FIG. A] approximately 1/4" back from the drain hole opening.
- Position the Vessel over the matching drain hole in your countertop. Carefully lower into place slowly working the sealant down until the Vessel contacts the countertop.
- Check the seal between the countertop and Vessel for any sealer that may have squeezed out. If sealer is visible, lift and remove the excess off countertop and Vessel with a soft cotton rag. Once excess sealer is removed reposition vessel to countertop.
- Remove the mounting nut and rubber beveled washer from the tailpiece drain. If your tailpiece came with a thin rubber washer for mounting under the flange, please discard.
- Apply a bead of silicone sealer under the mounting flange of the tailpiece and position into the drain hole of the Vessel. [FIG. B] Do not use plumbers putty under the flange for this may damage or discolor stone. Work into place by slowly pressing the tailpiece until it seats against Vessel. You should have a small amount of sealer squeezing out between the tailpiece flange and Vessel.

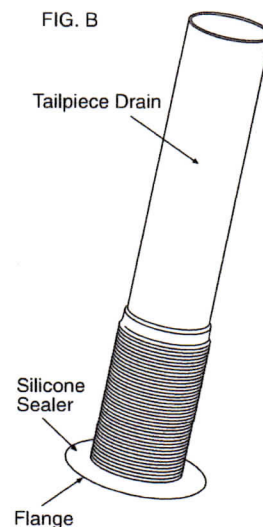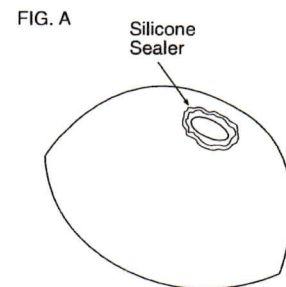

- While holding the tailpiece in place, slide the beveled rubber washer onto the tailpiece beveled side up. Follow with a metal washer (if provided) and mounting nut.
- Tighten mounting nut. Nut torque just needs to be enough to seat tailpiece flange firmly into Vessel. Do not over tighten. Remove any excess sealer inside the Vessel with a soft cotton rag.
- Your sink is now installed and ready for the drain trap to complete the drain installation. Allow 12 to 24 hours for sealer to cure before use.

Care and Maintenance:

Stone needs special care. Please follow instructions below to keep your sink looking beautiful for many years to come.

- Rinse sink after use of any handsoaps, mouth wash, toothpaste, facial cleaners and shaving cream. These products over time may harm the sink finish.
- Protect your stone sink by cleaning regularly with a professional stone cleaner, available at most DIY stores.
- Do NOT use the following cleaners on your stone sink: Tub & Tile Cleaners, Acidic Toilet Bowl Cleaners, Ammonia, Powdered Abrasive Cleaners, Soft Paste Cleaners, Vinegar, Alcohol, Window Cleaners, Abrasive Cleaning Pads and Scouring Powders.
- Refer to the Stone Care Don'ts and Recommended Products guide attached to these instructions for complete care instruction of your D'Vontz stone sink.

Limited Warranty:

This product is warranted to the original purchaser to be free of defects in materials and workmanship for one year from the purchase date. Warranty is not transferable.

Proof of purchase in the form of the original sales receipt will be required for any warranty claim.

This limited warranty does not cover any costs associated with a product's removal and / or reinstallation, including labor, materials or damage to surrounding products or goods.

Use of any cleaning products other than those suggested by D'Vontz will void warranty. Use of plumbers putty will void this warranty.

Please contact Customer Service at 877-322-3600 for any warranty issues.

If you have any trouble during the installation of your D'Vontz sink, please call our Customer Service department at 877-322-3600.

Thank You for choosing D'Vontz.

Please install this product according to the installation guide and all local plumbing codes.