




Installation & Assembly

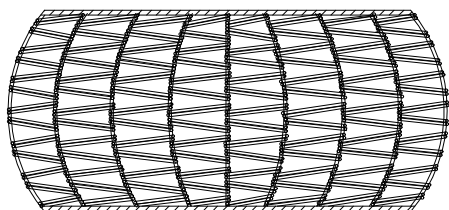


⑥ hemp rope lampshade 1pcs

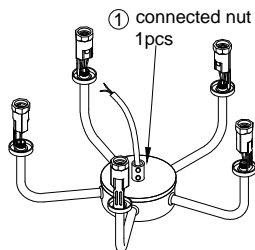

① connected nut 1pcs




⑤ ring 1pcs

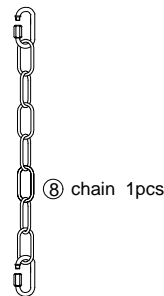


⑧ chain 1pcs



X 1PCS



X 1PCS




X 3PCS



X 3PCS




X 3PCS




X 3PCS




⑦ fabric lampshade 1pcs



② grub screw 2pcs




③ hex key 1pcs



⑨ canopy 1pcs

⑩ cap nut 2pcs



⑬ cylinder tube 5pcs

1. Let the wire go through the tube ④, rotate tube ④ to install to the fixture, fasten it with grub screw ②.

2. Let the wire go through the fabric lampshade ⑦ (inner), hemp rope lampshade ⑥ (outside) and ring ⑤, rotate ring ⑤ to install both lampshades to the fixture.

3. Hang the fixture to the canopy ⑨ with chain ⑧, let the wire go through the chain ⑧ and canopy ⑨.

4. Install the bracket to the ceiling junction box with screw ⑪.
5. Connect the wire to your home line with cap connector ⑫.
6. Install the fixture to the bracket with cap nut ⑩.
7. Put the cylinder tube ⑬ on top of bulb holder and install the bulb ⑭.

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !