




INFLATABLE DOCK INSTRUCTION MANUAL
GUIDE D'UTILISATION DE LA PLATE-FORME GONFLABLE
MANUAL DE INSTRUCCIONES DE PLATAFORMA INFLABLE

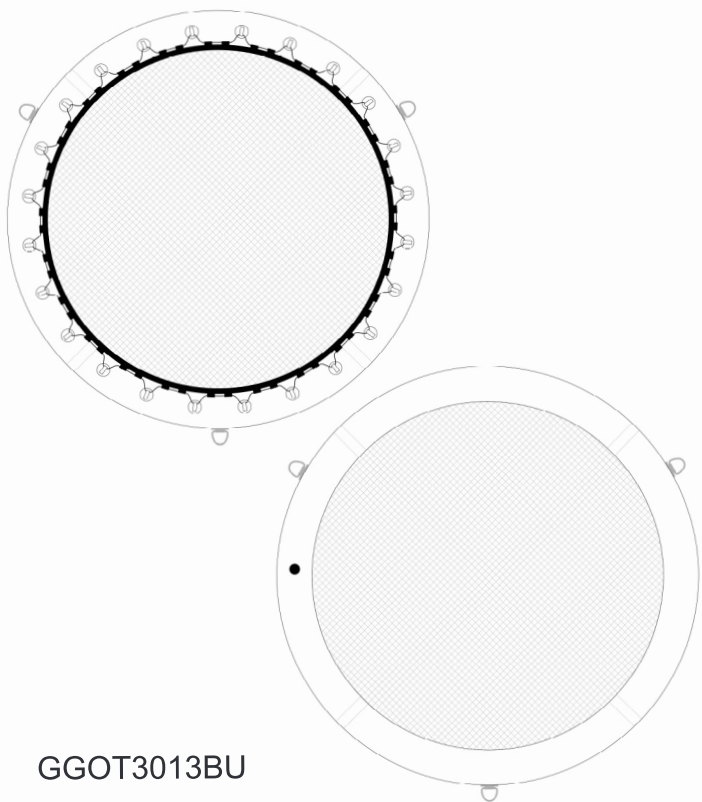

GGOT3013BU

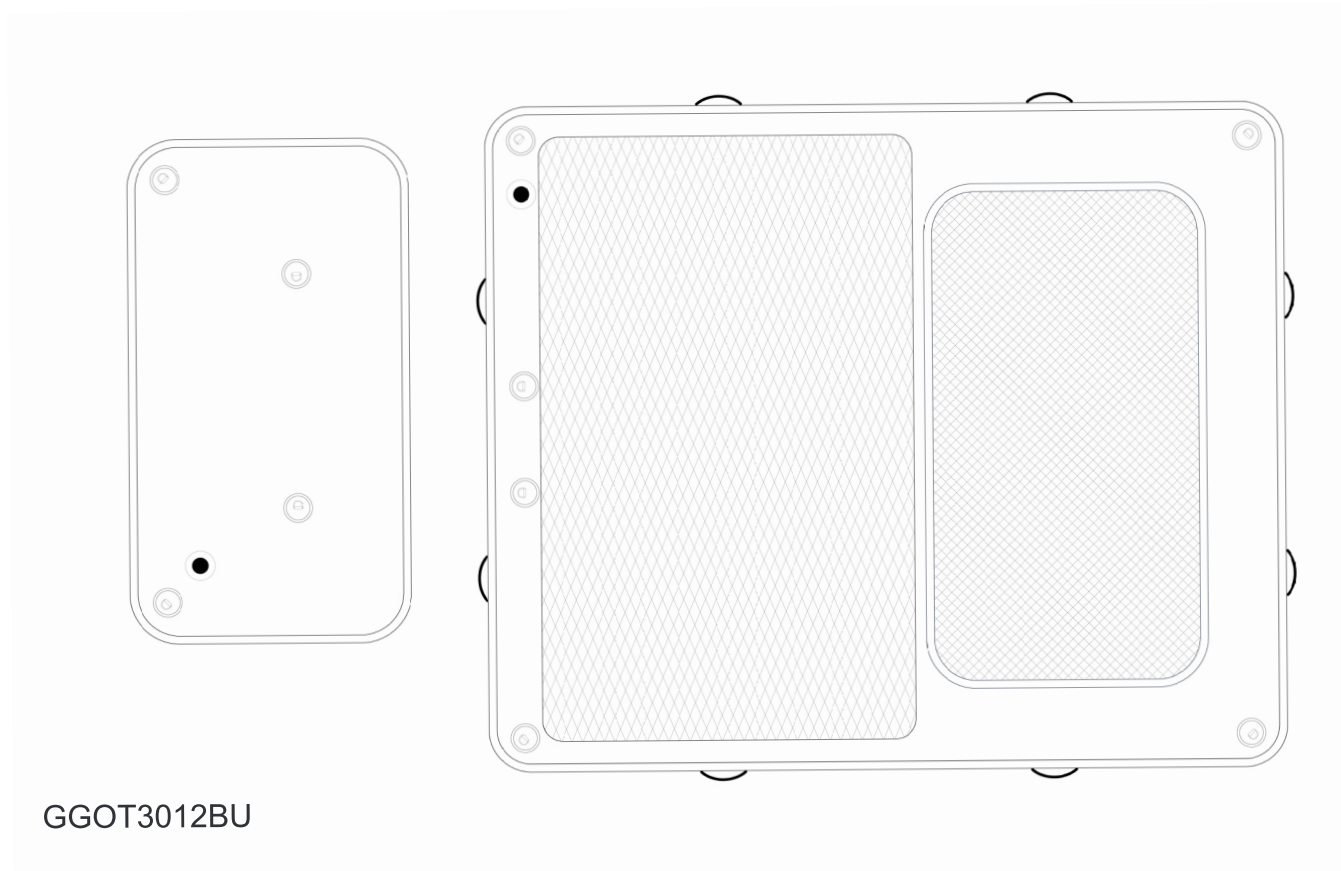

GGOT3012BU

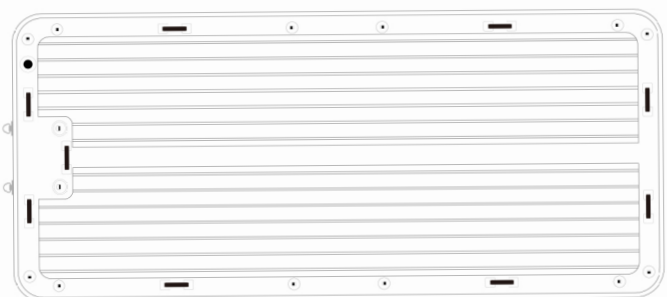

GGOT3011BN

ITEM / ARTICLE / ITEM	SIZE / DIMENSIONS / TAMAÑO	CAPACITY / CAPACITÉ / CAPACIDAD
GGOT3011BN	14. 76'x5'x8" (4, 5m x 2, 0m x 20cm)	4-8 PERSON / PERSONNES / PERSONAS
GGOT3012BU	9. 8'x8'x6" (3, 0m x 2,5m x 15cm)	4-6 PERSON / PERSONNES / PERSONAS
GGOT3013BU	7. 8'x7. 8'x5" (2, 4m x 2,4m x 10cm)	2-3 PERSON / PERSONNES / PERSONAS

All inflatable dock products can be readily compacted to almost original packaging size if user utilizes pump (electric or manual) to remove all air from inside the unit and follows the provided fold instructions.

INTRODUCTION: We thank you for your purchase of our inflatable dock. Please read the following

instructions carefully before using this inflatable dock and keep the instructions for future reference. If you resell the dock; please hand this manual over to the buyer. This inflatable dock has been manufactured to the highest quality standards.

FEATURES:

- Versatile design and features • Easy assembly and maintenance
- Low cost of maintenance and operation • High quality performance
- Quality certified construction • Reliable, heavy gauge PVC material
- High pressure drop stitch floor provides superior rigidity • Easy to store and carry in provided carry bag

In addition to set-up instructions and operational guidelines, we have also included several very important **WARNING** statements that pertain to the safe use and enjoyment of this new dock. It is very important that you take the time to read them all. Please make certain that you understand the information contained in this manual

prior to initial use. **PLEASE RETAIN THIS MANUAL FOR FUTURE REFERENCE!**

Important Safety Guidelines. Please read & understand prior to using your dock. To enhance the enjoyment of your dock and protect the safety of the user of the product, **ALWAYS STRICTLY OBSERVE** the following important

- 1. WARNING:** Dock designed for use in sheltered water only.
- 2. WARNING:** This is not a life saving device. Use only under competent supervision. Never allow diving or jumping onto or off of this product. Never leave in or near the water when not in use. Never tow from any vehicle.
- 3. WARNING:** Inflate the product as outlined in **Assembly, point #3**. Use the provided gauge and inflate to approximately 10 PSI. Do not over inflate. Excessive inflation of the product can cause it to burst or cause damage to the seams. It is crucial that the docks pressure be reduced during prolonged use in direct sun. Also, in cold conditions, the pressure may decrease and more air will need to be added to ensure proper inflation. Use the gauge.
- 4. WARNING:** A certified Personal Flotation Device (PFD) is required for the user. It is especially important that children and non-swimmers wear a Personal Flotation Device at all times. Children and non-swimmers need special instruction in the use of the Personal Flotation Device.
- 5. WARNING:** Do not use your dock if you suspect a puncture or leak. It may be unsafe.
- 6. WARNING:** Beware of offshore winds and currents.
- 7. WARNING:** The total number of persons and total weight shall not exceed the information printed on the dock.

ASSEMBLY:

1. Find a flat area and make sure that the area you have selected to set up the dock is completely free of stones, sticks, sharp objects, or other foreign debris.
2. Carefully unfold the dock, spreading out the floor to make it as smooth as possible.

CAUTION: DO NOT DRAG THE DOCK ACROSS THE GROUND AS IT MAY TEAR THE DOCK OR CAUSE

OTHER DAMAGE. We will not be held responsible for damage caused to the dock due to mishandling or failure to follow these instructions.

- 3. Inflation:** Unscrew the valve cap (**A3**). Make sure valve pin is in up (locked position - **A2**). Attach the air pump hose nozzle and twist to lock the hose to the valve. As the chamber is inflated, detach the hose and screw in the valve cap.
- 4.** Inflate the dock using the provided electric pump. Failure to do so will result in an improperly inflated dock. **When using the provided electric pump, install the hose at the front side of the electric pump (on the side of the switch), and attach to the valve to inflate. Do not use high-pressure air compressors.**

WARNING: Do not over inflate. Optimum pressure is 10 PSI.
Please see the Safety Valve Diagram A1.



A1



A2



A3

5. **Deflation:** Remove the Valve Cap (A3) and push down the deflation button/Pin (A2) until it is locked. When the button/pin is down, the air will flow out. If you want to stop deflation, push down the Deflation Button (A2) again to allow it to lock in the up position. The deflation will stop when the button pops up. To fully deflate the dock for storage, use the deflation feature on your pump (inflator). Detach the hose on the electric pump and install it at the back side of the electric pump (on the opposite side of the switch), and attach to the valve to deflate.


CLEANING & STORAGE

The item should be rinsed after each use. The item should be washed when necessary. The item should be stored, cleaned, and dried, in cool dry place.

WARNING: Certain household cleaning solvents, chemicals and other liquids (such as battery acid, oil and gasoline) could damage the PVC fabric. In the event of spill or mishandling, you should check for leaks and inspect for structural integrity. Use a mild soap to clean the dock; rinse thoroughly. Do not use MEK, acetone, or other harsh chemicals for cleaning.

REPAIR:

There is a chance the high pressure valve can become loose. To check this, use the supplied valve wrench in the repair kit to tighten the valve. Turn lightly in clockwise direction. (See diagram A4)

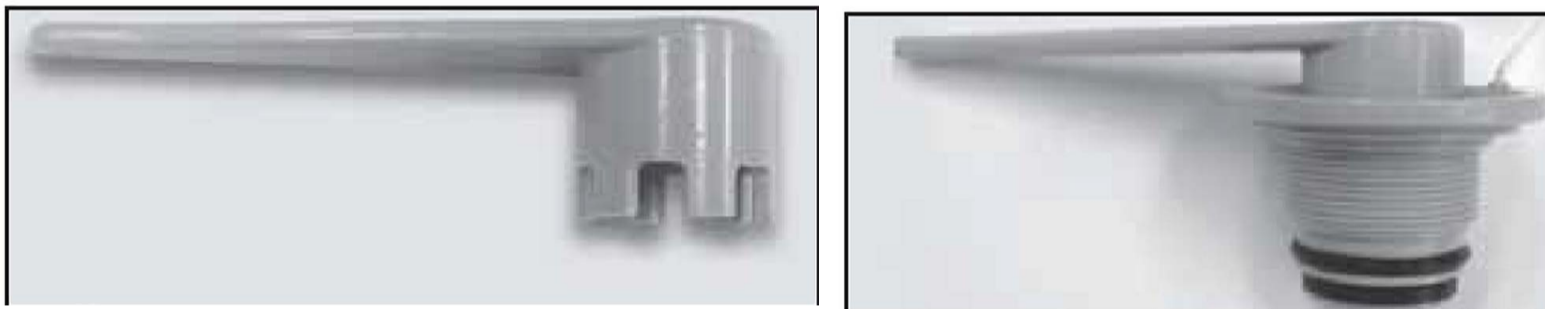

A4


Small holes and punctures can be repaired with the provided repair kit.

1. Find the leak.
2. Deflate the dock.
3. Thoroughly clean and dry the surrounding area of all dirt and grime.
4. Cut a piece of repair material in a round shape larger than the damaged area.
5. Use a pencil to lightly trace the outline of the patch over the area of the hole.
6. Apply adhesive-like clear PVC cement (not included) to the underneath side of the patch and the area to be repaired. Coat both lightly but completely.
7. Put the repair patch on the damaged area and press down firmly.
8. Allow 12 hours to dry. After repair patch has dried, apply glue around the edges of the patch for a complete seal. Allow to dry 4 more hours.

After completing steps 1 through 8, the dock is ready to use.

If you have any questions or issues with your Our Products, do not refer to the retailer. We are the experts and are here to help. Please contact us directly at Luxaqua456@outlook.com. Have your product name and model number available.

We will take care of any issue or question directly.

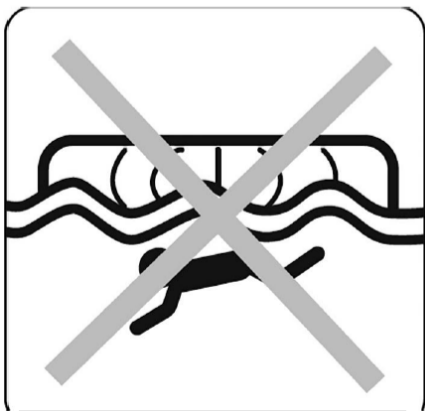

Warning: Entrapment risk! risk of drowning! Do not swim underneath!

Advertisement: risque pris au piege !

Risque de noyade ! ne pas nager sous !

Advertencia: riesgo de quedar atrapado! riesgo de ahogarse! jno node debajo!