



Loure® | K-45215-G

Single-function showerhead, 1.75 gpm

Features

- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Single-function showerhead with 48 translucent nozzles
- 4-1/2" (114 mm) diameter sprayface
- 1.75 gpm (6.6 lpm) maximum flow rate
- Complements Loure faucets and accessories



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|-------------------------|
| CP | Polished Chrome |
| SN | Vibrant Polished Nickel |
| BN | Vibrant Brushed Nickel |
| BL | Matte Black |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-06-2026 19:01 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Flow Rate
Shower/Rainhead Rated 1.75 gpm (6.6 l/min)
Maximum Flow:

Material

- KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23723 Faucet cleaner
K-14679 7-1/2" shower arm and flange

Technology


- Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray
-

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



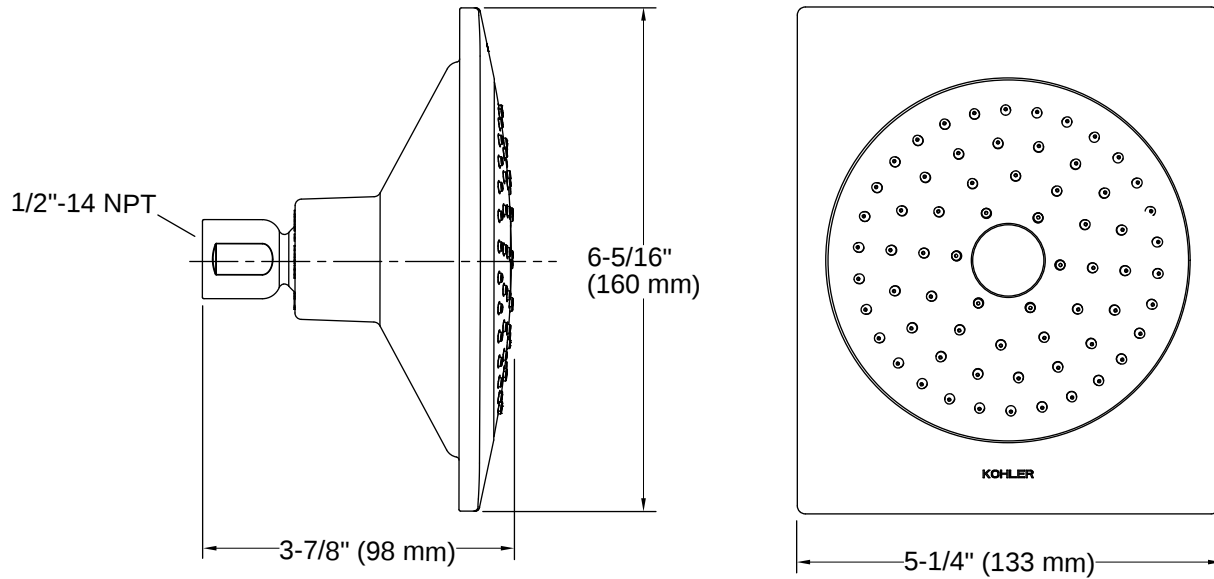

Installation

- Wall-mount
- Shower arm and flange sold separately

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

