

MAHJONG TABLE ASSEMBLY INSTRUCTIONS

Different models, same installation method



Step 1. Install the Base



Screw the leveling screws onto the non-slip pads, then attach the non-slip pads to the table legs and snap them into place. As shown in Figure 3, first fit the long slot over the table corner, then press the short slot end against the long slot strip. Place the right-angle nut, (put the washer onto the large screw), and screw the large screw in halfway—do not tighten it fully yet. After installing all four table legs in the same manner, flip the base over, then lift the main unit up and align it with the four corners to set it in place.





Step 2. Install the Side Frames



First, install the handles on the side frames (the image is for illustration; install the handles according to the actual model). Secure the handles with small round-head screws, then insert the drawer boxes.




Remove the screws from the four corners of the main unit (set aside for later use). Take the side frames, align them with the screw holes, and screw them back into the holes where the screws were just removed. Do the same for all four sides, tightening the screws securely. Ensure the corner joints are closed tightly, then install the small flat-head screws at the corners—one screw per corner.

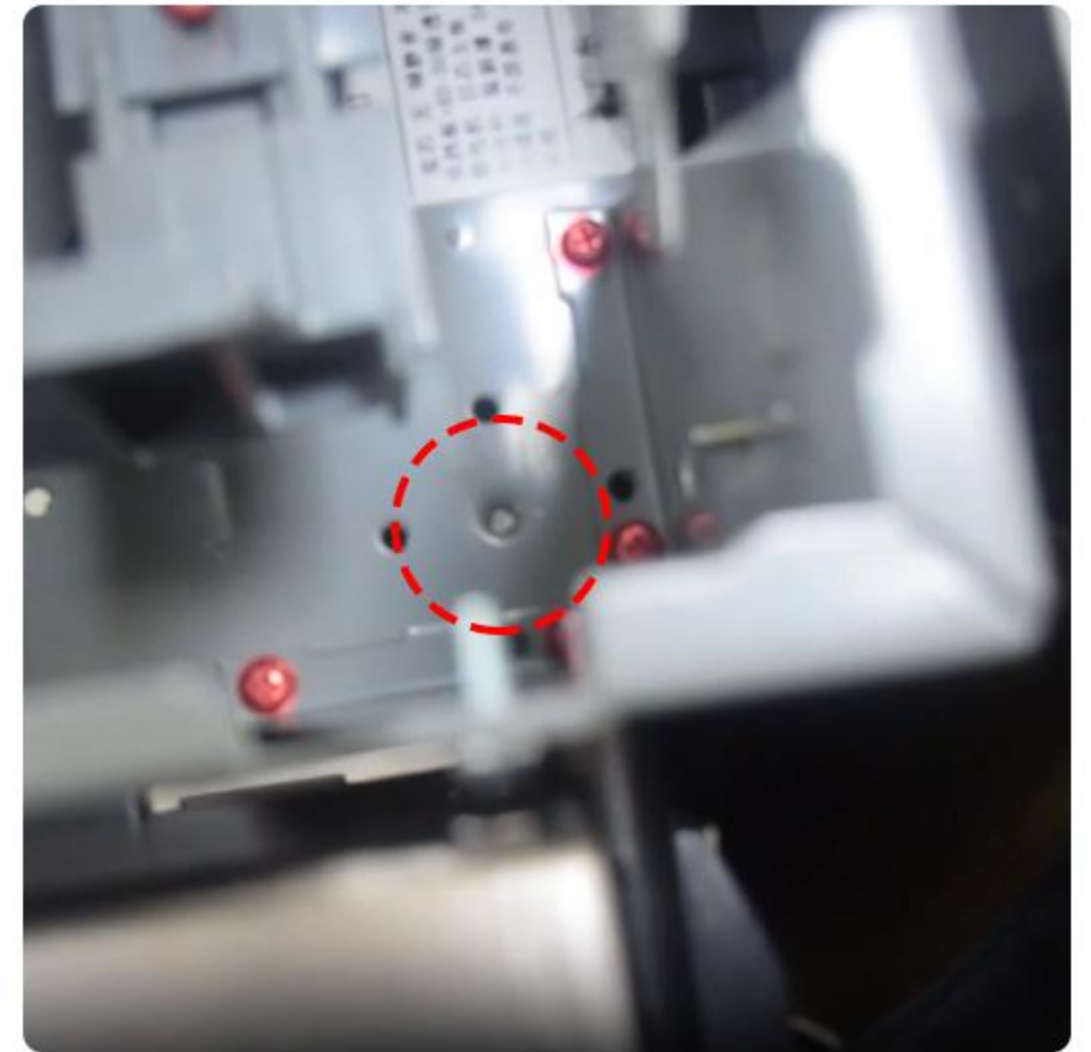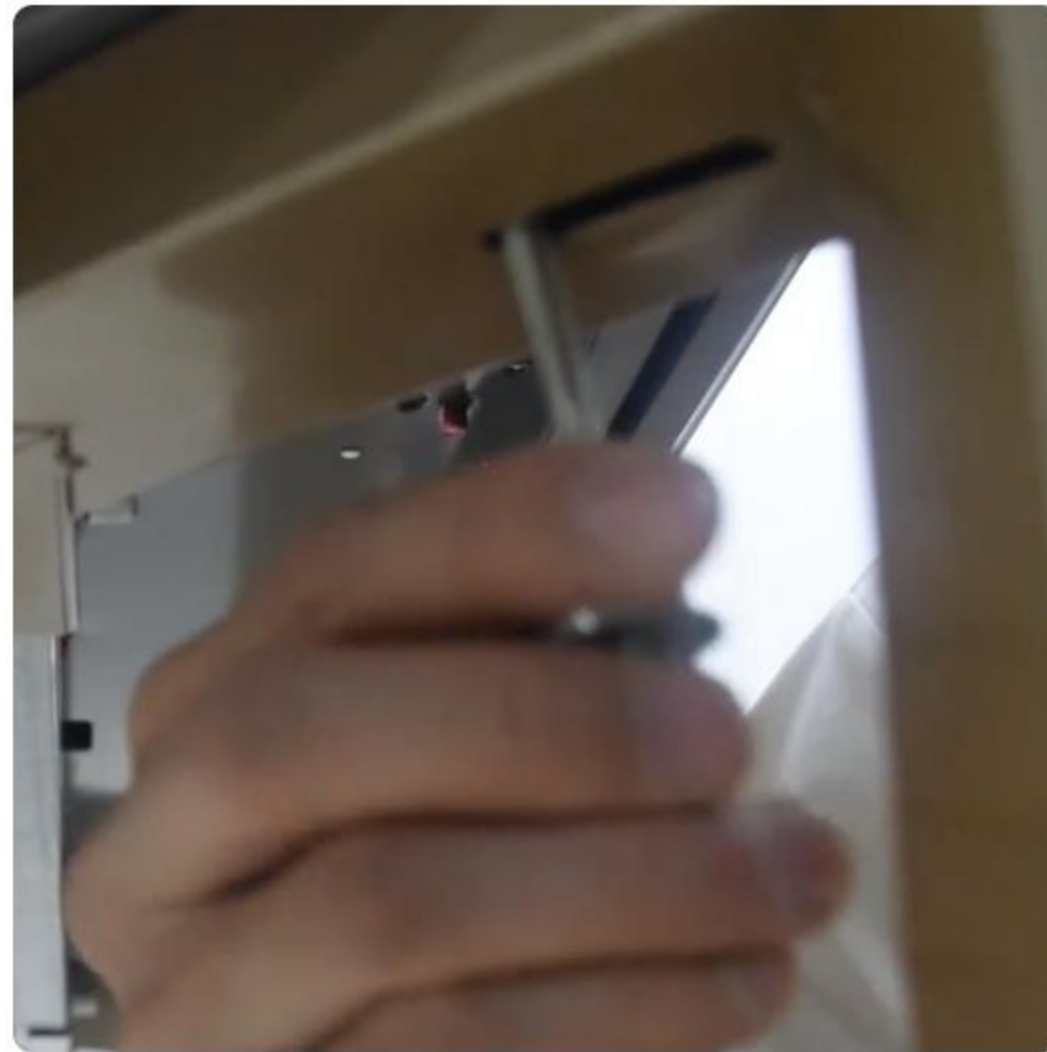

Place the washers onto the long screws, then screw them from the bottom to connect the main unit to the base (align the screw holes as shown in the figure).

Step 3. Install the Top Frame Strips

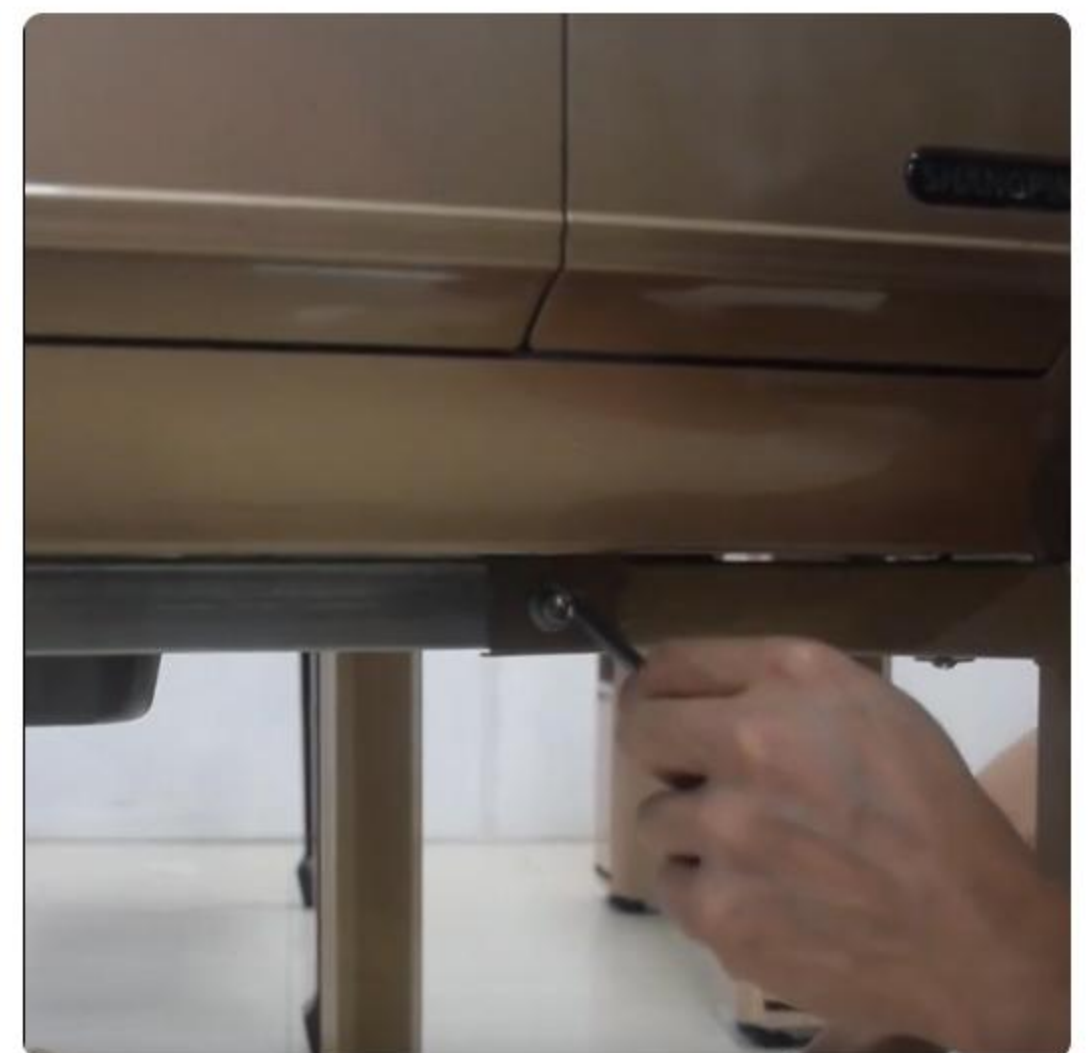

Assemble the frame strips into a square frame, then firmly tap it onto the machine until it snaps into place. Finally, go back and tighten the large screws on the base.