

Stainless Steel Playtop Home PARTS LIST

CUSTOMER SUPPORT

For assistance or replacement parts,
please contact us.

HARDWARE INCLUDED:




Phillips-head screws
30 pcs (installed in place
on cage panels) *



Hex screws
4 pcs (installed in place
on playtop supports)



Knobs
4 pcs (installed in place
on cage & playtop bar)



C
Casters
4 pcs

* (plus 2 bagged extras)


TOOLS INCLUDED:

Allen wrench






TOOLS NOT INCLUDED:

Phillips-head
screwdriver

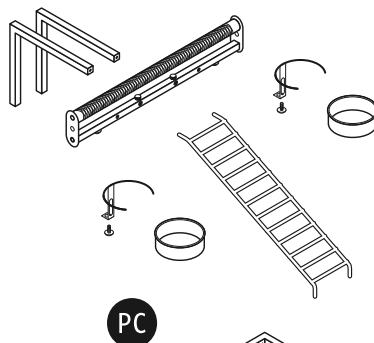

KEY:

B = Back panels
LS = Left Side panels
F = Front panels
RS = Right Side panels
R = Roof grille
C = Casters
PC = Playtop Components
CC = Cage Components

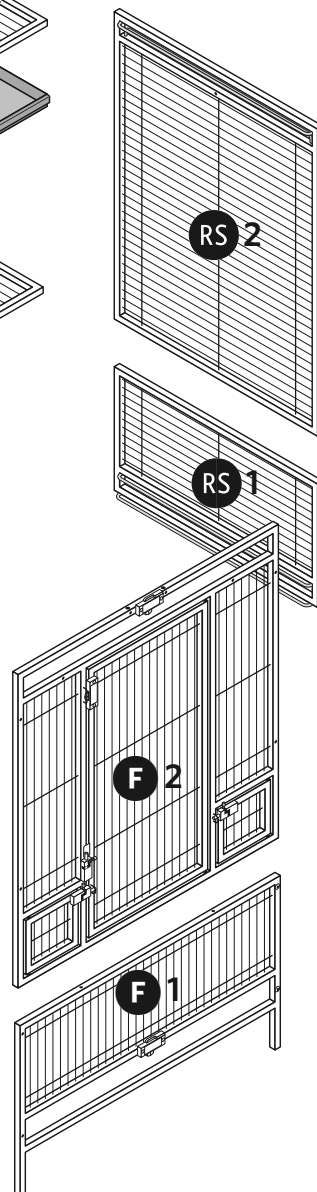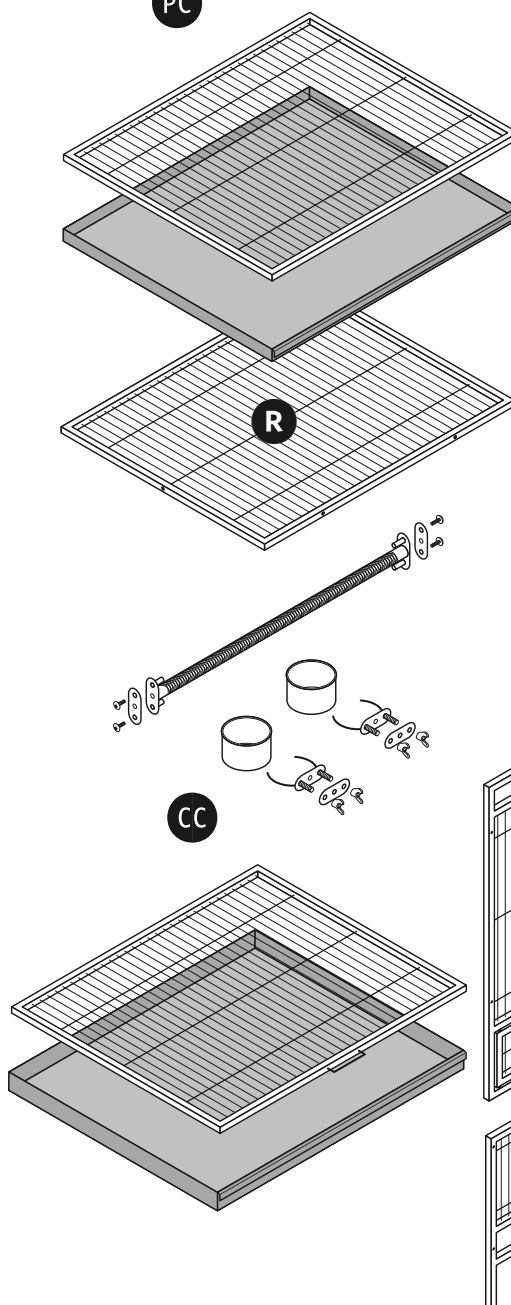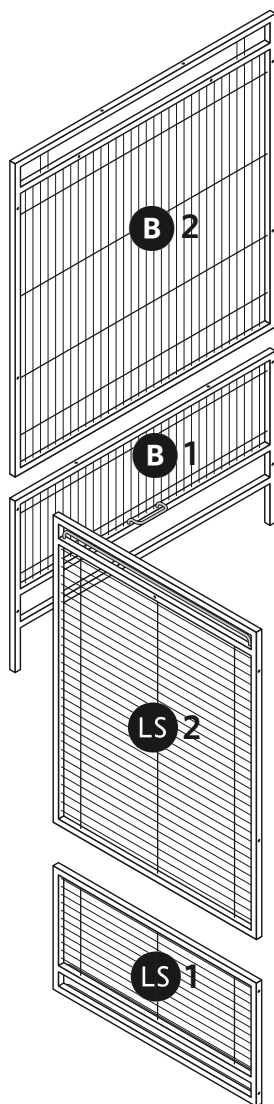

Stainless Steel Playtop Home

CUSTOMER SUPPORT


For assistance or replacement parts,
please contact us.

TOOLS NEEDED : Phillips head screwdriver • For best results, follow Assembly Steps in order presented.

KEY:

B = Back panels
LS = Left side panels
F = Front panels
RS = Right side panels
R = Roof grille
C = Casters
PC = Playtop Components
CC = Cage Components



1 PIECES

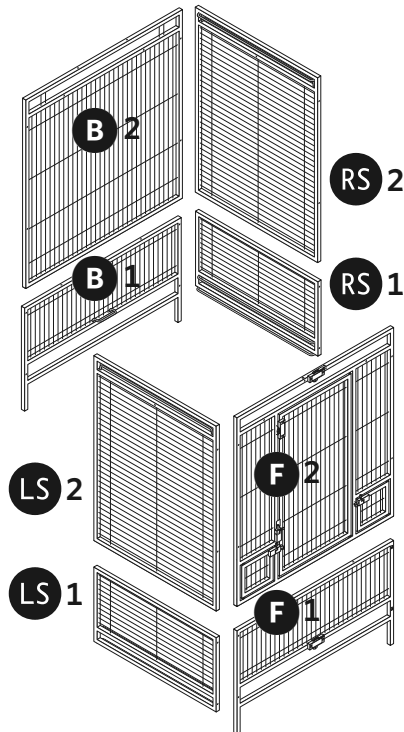

In most cases, we recommend
two people assemble this cage.




Screws are installed in place. When attaching panels or components,
back the screw out, match up the components, and reinsert to attach.

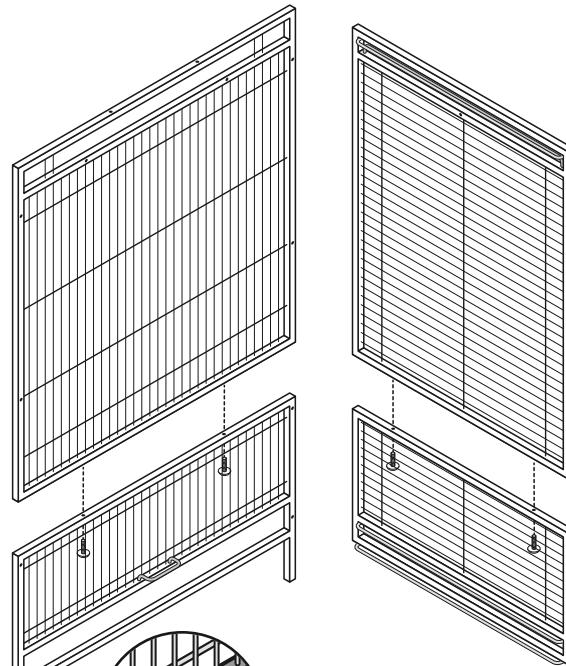

*Note: Small loop on the
back panel should face
the interior. This loop
helps hold the bottom
grille in place.*



Back the Phillips-head screws
out, align the **upper panel** with
the **lower panel** and retighten
the screws to attach.

Grille/tray tracks on all side
panels should be on the same
side, facing the interior.

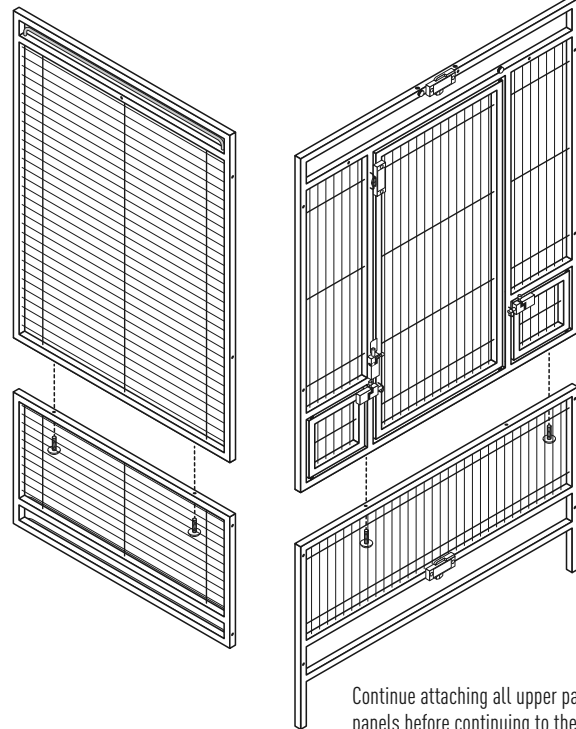



Continue attaching all upper panels to lower
panels before continuing to the next step.

2 PIECES

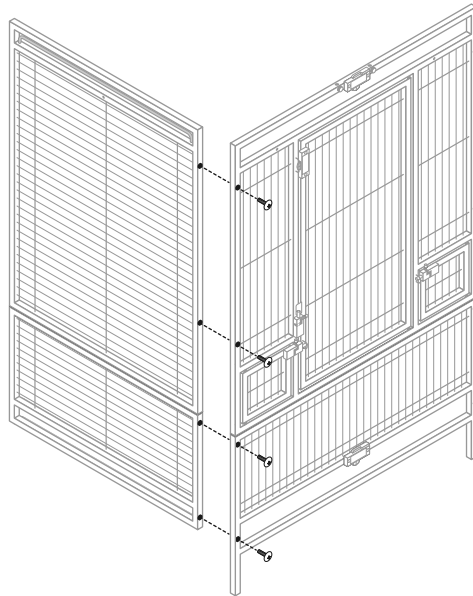



Back the Phillips-head screws out, align the side panel unit with the front panel unit, and re-tighten the screws to attach.

Repeat this method for all panel units to assemble the cage body.

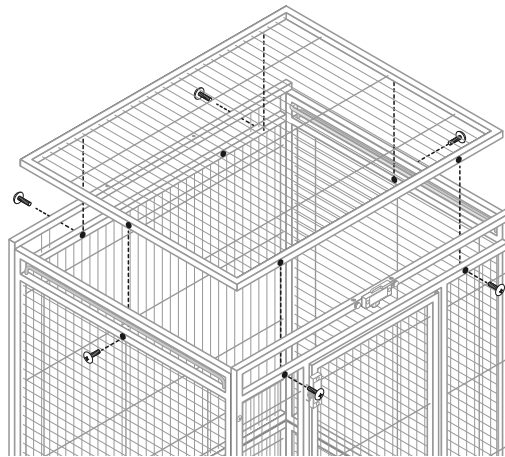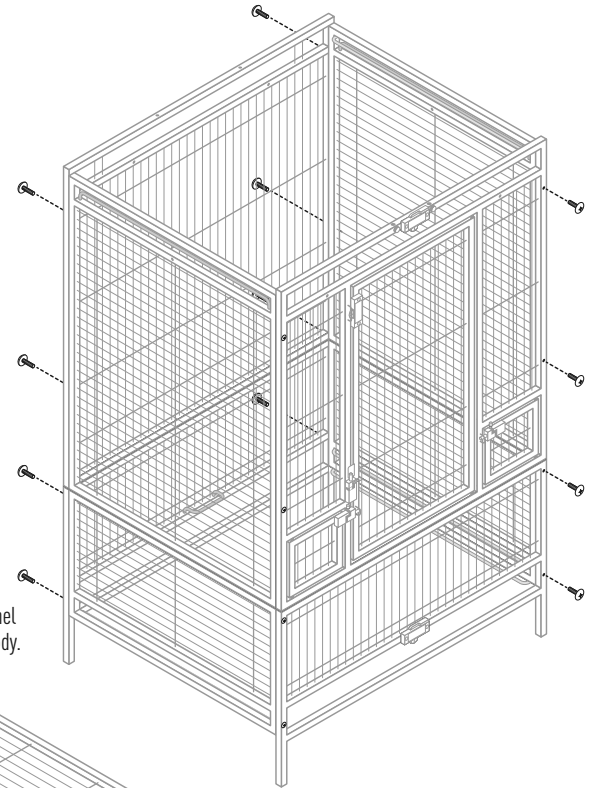


Set the cage roof grille in position and attach with Phillips-head screws.

3 PIECES

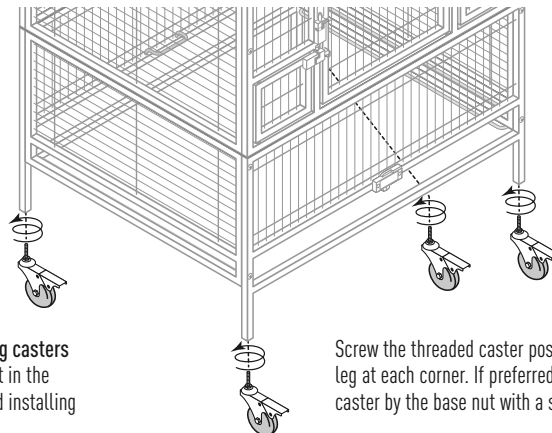


While the lockable **rolling casters** can be added at any point in the assembly, we recommend installing them at this time.

Screw the threaded caster post into the frame leg at each corner. If preferred, tighten each caster by the base nut with a slim wrench.




4 PIECES

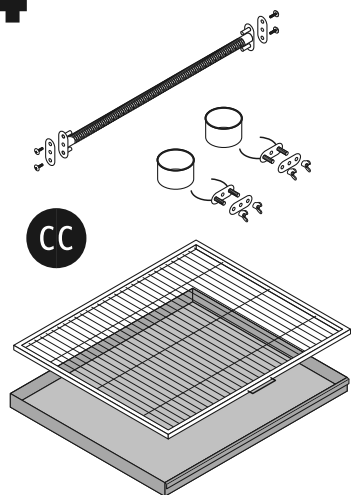

Perch:

Hold the perch in place in the cage interior. Install a Phillips-head screw through the bracket, through the cage wire, into the perch bracket and tighten with a Phillips screwdriver for all four screws.

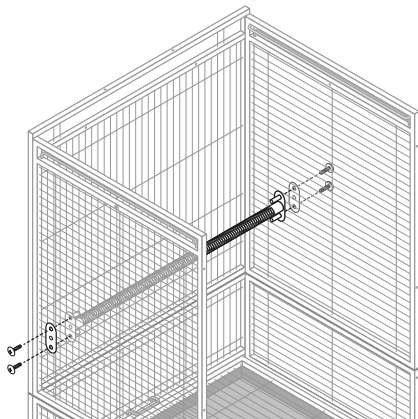


Cups/cup holders:

Open the cup door.

Insert the screw posts on the cup holder through the door mesh, add the bracket on the outside, and tighten to the doors with the wing nuts.


Place the **deep cups** into the holders.

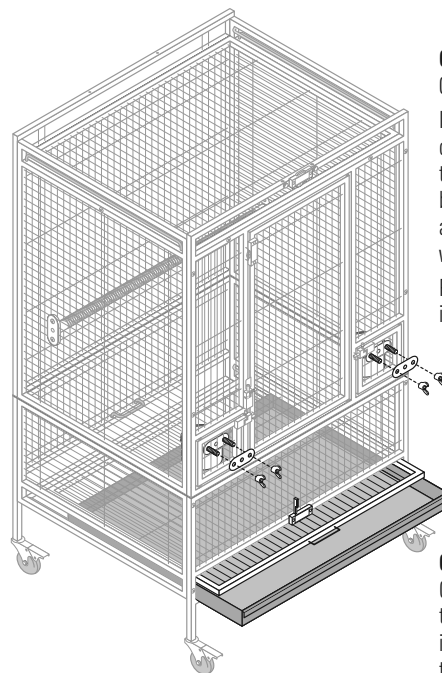


Grille and tray:

Open the grille lock. Slide the **grille (with handle)** into the top channel and the **deep tray** into the bottom channel.

5 PIECES

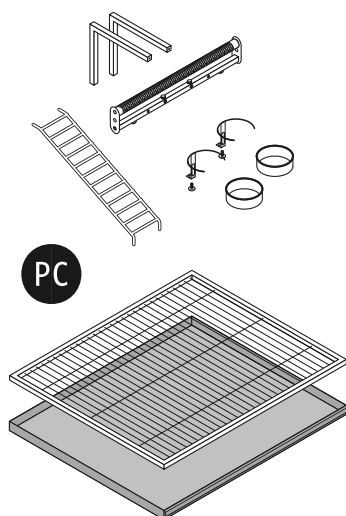

Remove the hex screws from the ends of the perch bar supports. Install the **perch bar supports** on the back panel of the cage.

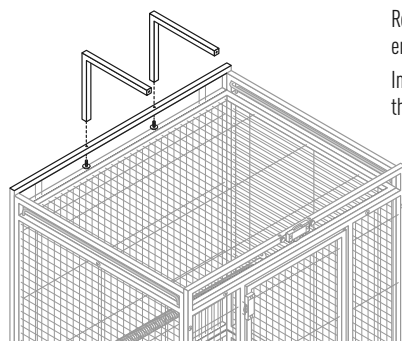


Back the Phillips-head screws out on the underside of the perch bar and attach the cup holders.





Attach the **perch bar** to the support rails using the hex screws and the allen wrench.

Insert the **shallow cups**.

Open the grille lock. Slide the **thin grille** into the top channel and the **shallow tray** into the bottom channel.

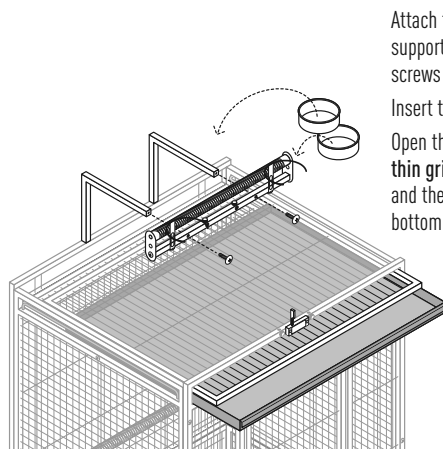

Loosen the knob screws on the perch bar rail and along the cage front. Insert the **ladder** and re-tighten the knob screws.

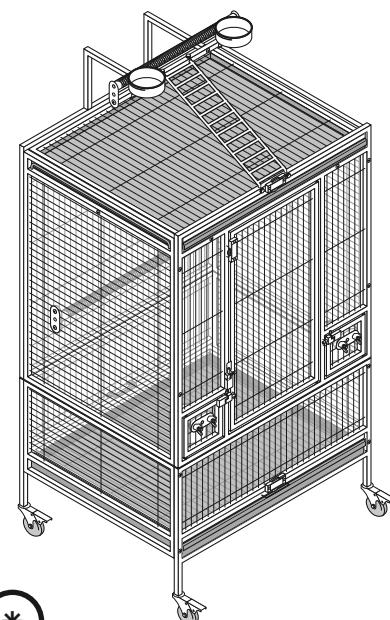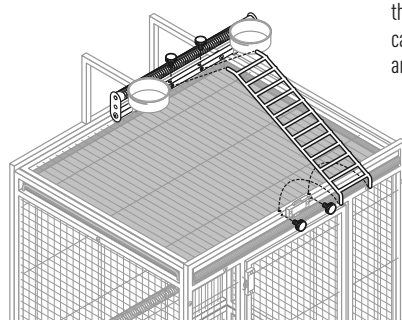

When fully assembled, check and tighten ALL screws and wing nuts over the entire cage to ensure a safe and stable home.

Assembly completed.