


**Submitted Model No.:** 

## **Specific Features:**



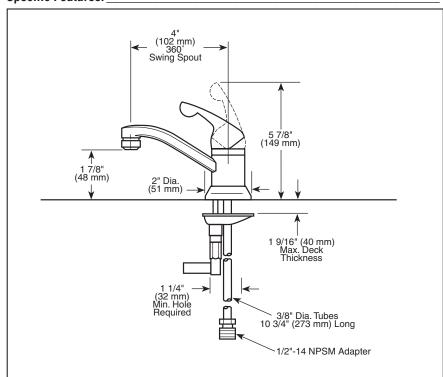

# LAVATORY FAUCETS

- Single Handle
- Deck Mount
- 1 Hole Sink Applications

### STANDARD SPECIFICATIONS:

- Single handle lavatory deck faucets for exposed mounting on one hole sinks.
- 1.5 gpm (5.7 L/min) vandal resistant aerator.
- Solid brass fabricated body.
- 4" (102 mm) long spout swings 360° (570LF-WFHDF).
- Vandal resistant lever handle. Red/blue colored graphics indicate hot/cold temperature.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control handle shall return to the neutral position when valve is turned off.
- Adjustable handle limit stop.
- All operating parts shall be replaceable from the top.
- Models have 3/8" O.D. copper supply tubes with 1/2"-14 NPSM adapters.
- Available Options for Field Conversion:
- 6" (152 mm) Long Swing Spout. Order RP9633.
- 8" (203 mm) Long Swing Spout. Order RP5654.
- 6" (152 mm) Long Elbow Handle with Red/Blue Graphics to Indicate Hot/Cold Temperatures. Order RP5645.

#### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.





## **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.

