


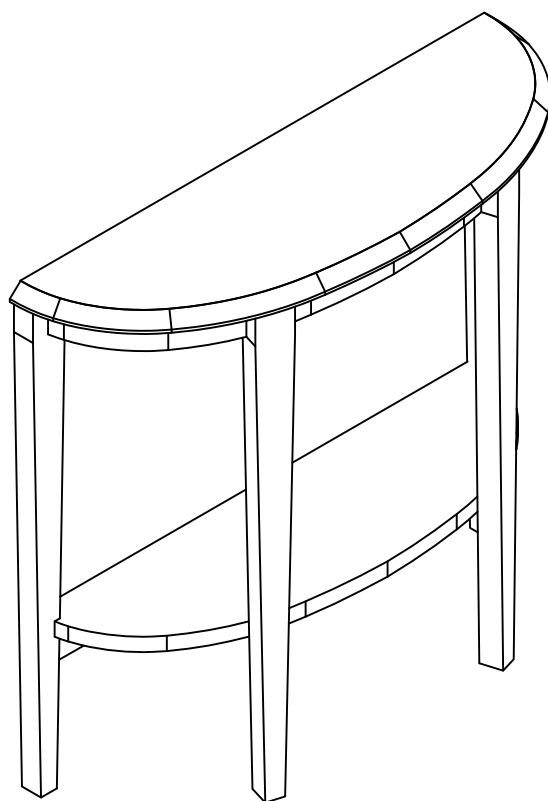


ASSEMBLY INSTRUCTIONS

CONSOLE

PARTS


Check that you've received
all parts listed below.

①




(1PC)

②




(1PC)

③




(1PC)

④




(1PC)

⑤



(1PC)

⑥



(2PCS)

HARDWARE

Check that you've received
all parts listed below.

Ⓐ



(6PCS)

Ⓑ



(4PCS)

Ⓒ



(4PCS)

Ⓓ



(4PCS)

Ⓔ



(2PCS)

Ⓕ



(8PCS)

Ⓖ



(8PCS)

Ⓗ



(1PC)

Ⓘ



(4PCS)

Ⓙ



(1PC)

Ⓚ




(1PC)

Ⓛ



(2PCS)

Ⓜ



(1PC)

Ⓝ



(1PC)

ⓐ



(1PC)


STEP 1

Remove protective materials and set parts on a flat, non-abrasive surface. Identify all parts packed in the carton against the parts list. Do not attempt to assemble the table if any parts are missing or damaged.

A. Tighten screws F and insert wood dowel H into shelf 1.

B. Place support bar 2 onto shelf 1 via corresponding holes.
NOTE: Camlock holes on support bar 2 face the edge of shelf 1.


C. Insert camlocks G into support panel 2 and turn clockwise to lock.

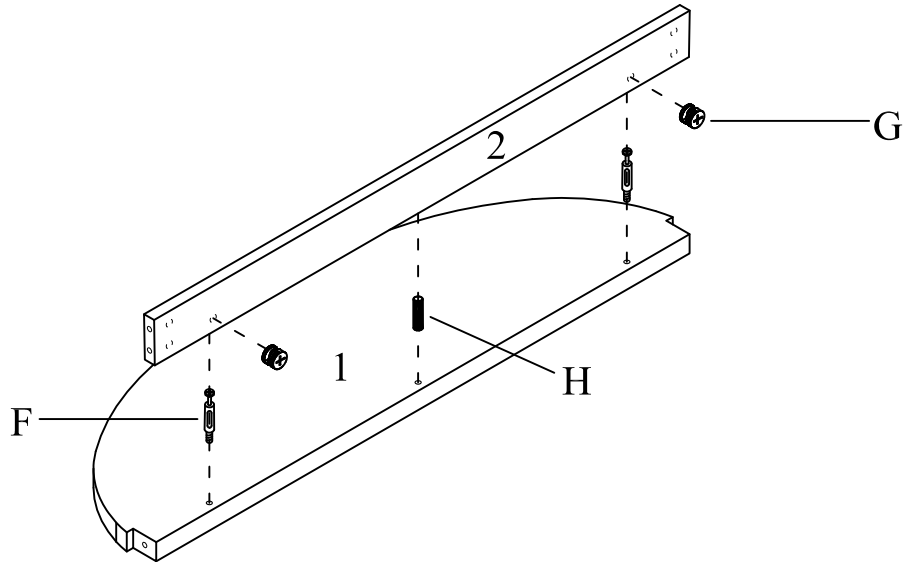

STEP 2


A. Tighten screws F to legs 3 and 4 then insert legs to corresponding holes of the shelf unit 1.

B. Insert camlocks G into shelf unit 1 and turn clockwise to lock.

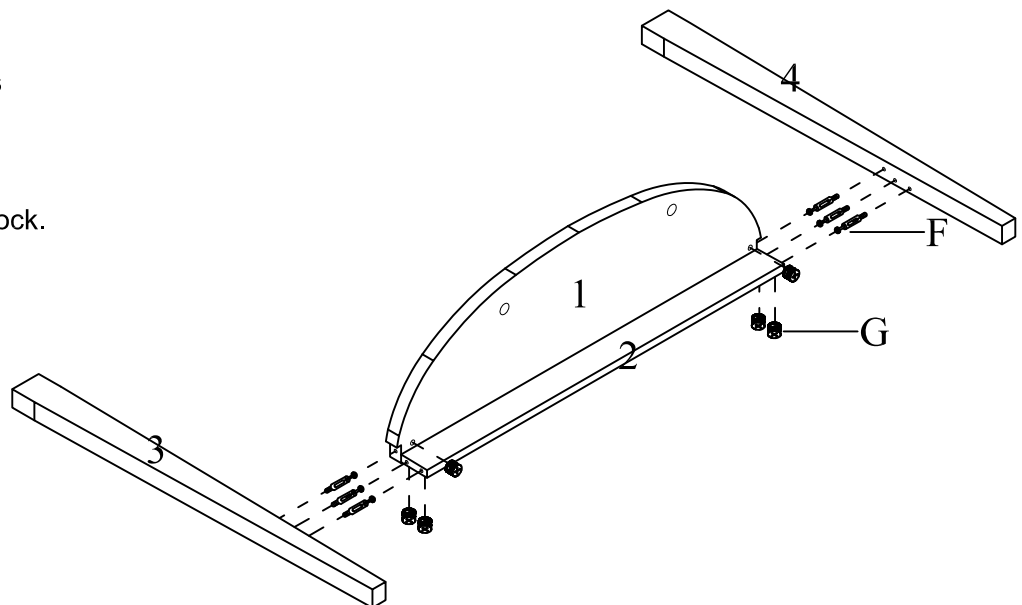


STEP 3

- A. Tighten bolt B into top panel 5. Insert top panel 5 into corresponding holes of leg 3 and 4.
- B. Insert half circle piece of lock C into leg 3, then the washer, then nut D as pictured. Tighten nut D using wrench J. Cover with cap cover E.
- C. Repeat step B with leg 4.

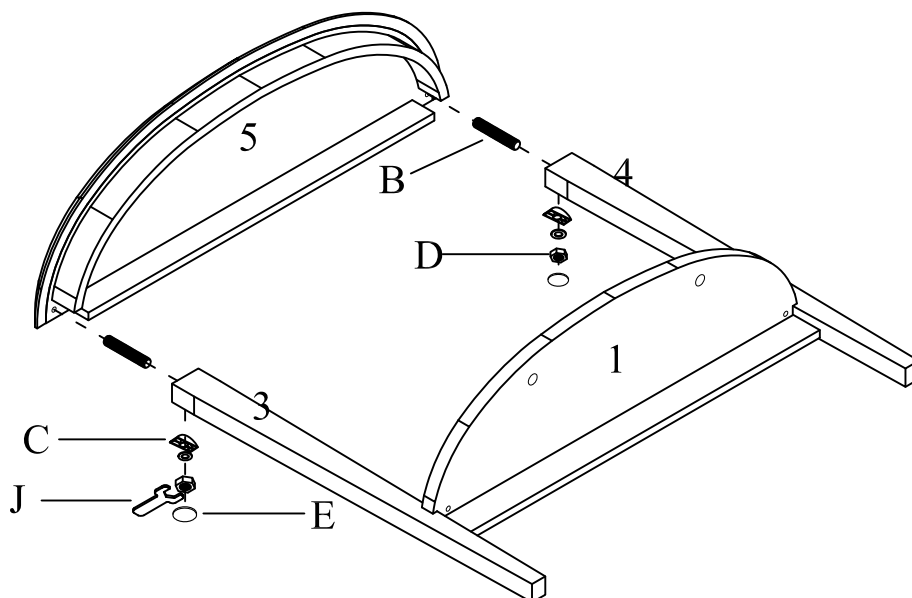


STEP 4

- A. Tighten bolt B into leg 6. Insert leg 6 into corresponding holes of shelf 1.
- B. Attach leg 6 to top panel 5 with screw A.
- C. Insert half circle piece of lock C shelf unit 1 then the washer, then nut D as pictured. Tighten nut D using wrench J.
- D. Push foot pad I into legs 3, 4, and 6 using thumb or slight tap into with a soft mallet.

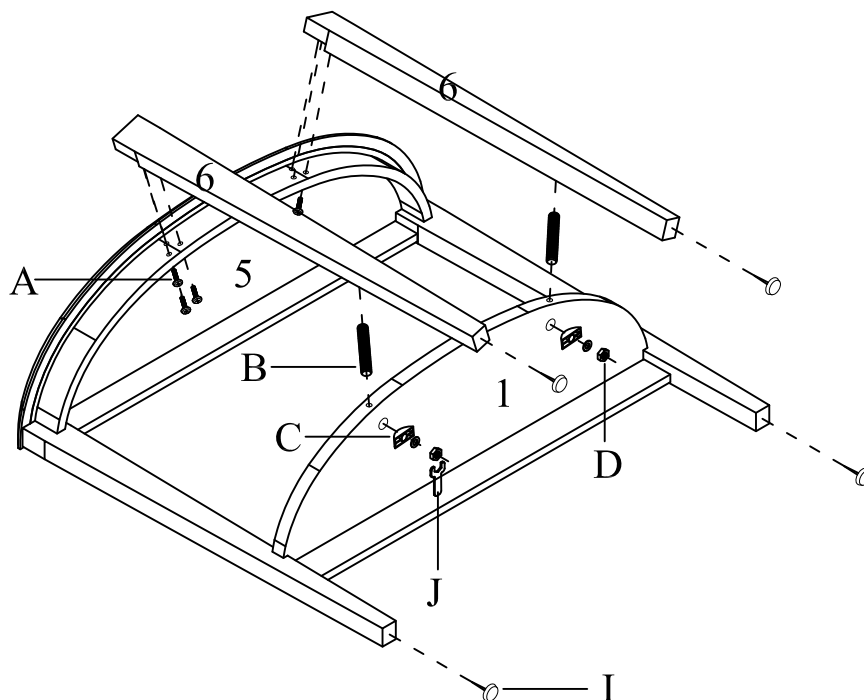


STEP 5

- A. Find a spot on a wall 1" below the top of the item.
- B. Using a drill bit slightly thinner than anchor N, drill a hole into the drywall.

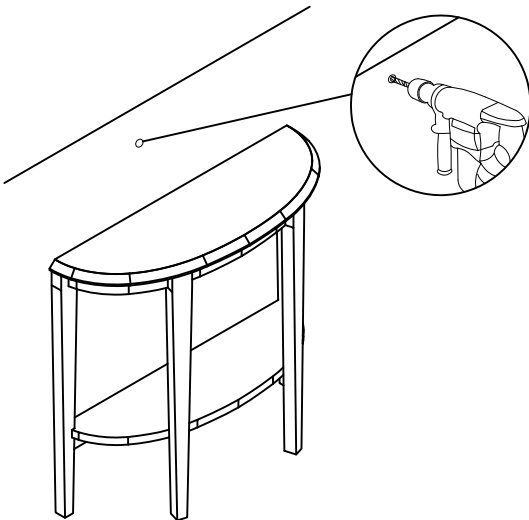


STEP 6

- A. Use a light hammer to tap anchor N into the hole.
- B. Anchor N should fit snugly. If the hole is too small, drill again to increase the hole size on the wall. Do not force anchor N into the wall.

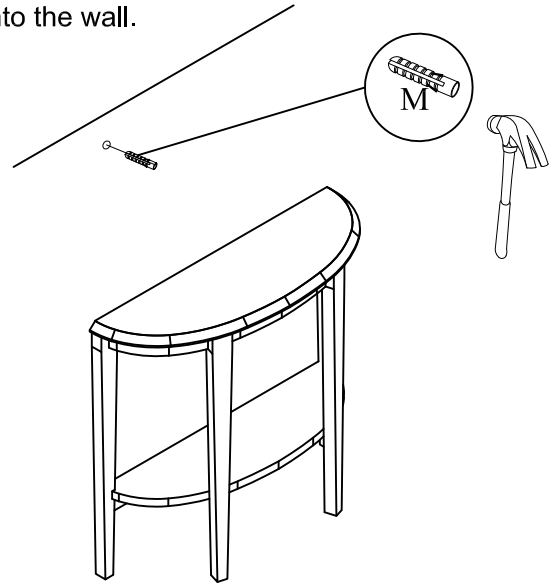


STEP 7

- A. Insert drywall screw M into bracket L, then into anchor N and tighten.
- B. Insert screw K into bracket L then tighten to back of top panel 5.

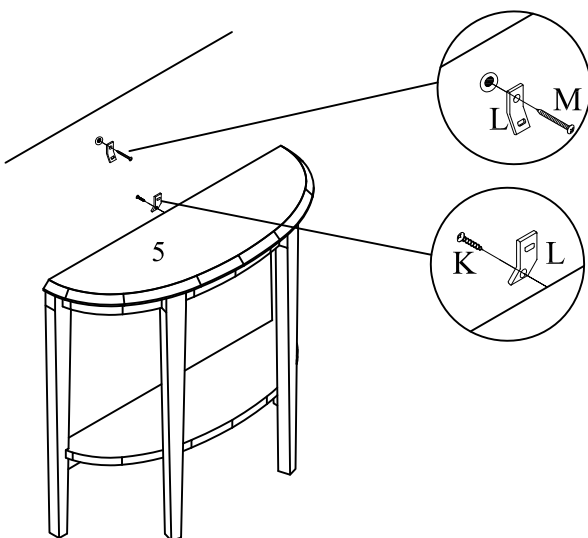

STEP 8

- A. Insert the end of strap O through bracket L attached to the wall, then through bracket L attached to the item and back through the head of strap O.
- B. Pull lightly on strap O until the strap stops. Your console is now ready to use.

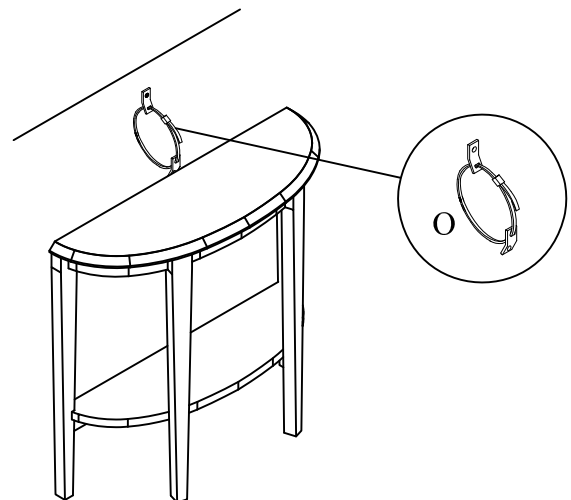



CARE INSTRUCTIONS

We recommend the following care for the best results:

- - Avoid dragging along floors. Always lift when moving
- - Clean spills immediately by blotting with a clean sponge or towel
- - Dust or wipe with a soft, dry cloth.
- - Avoid harsh chemicals or excessive moisture.



After assembly is completed, save these instructions and any included tools for future maintenance or re-assembly.