


Assembly Method

Easier to operate




1 Rotate the plate and remove it

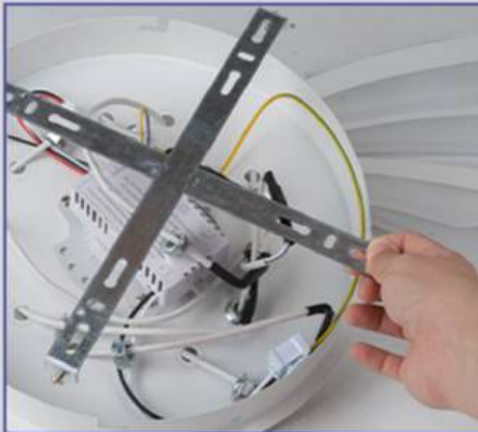

2 Pull the white wire tight from the back of the chassis to screw the light board into the chassis



3 Each wire has a corresponding nut, tighten

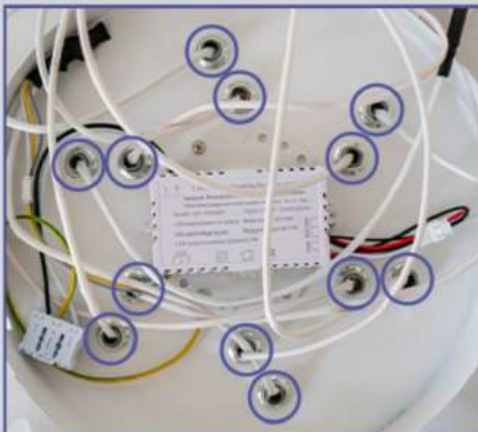

4 Six light boards, 12 spirals in total



5 Put in the fan blade and screw in the fan cap



6 Finish

Assembly Method

Easier to operate



1 Rotate the plate and remove it



2 Rotate to separate two accessories



3 Screw the long screw into the lamp body. Remove the same fitting from the kit and screw it into the light board.



4 Align the hole with the light plate



5 Tighten the screws



6 Installing the baffle



7 Align the screw holes and screw in the corresponding screws



8 12 light plate holes, 3 baffle holes



9 Installing transparent fan blades