

SYZ42 Stand

Thank you for purchasing AVFI's SYZ42 Stand

This product is design for free standing mounting of SMART kapp 42® and up to 60" screen up to 75 lbs.

For portrait setup VESA pattern must be centered; 400mm X 400mm, 400mm X 200mm ONLY


Confirm all hardware is included before you begin assembly.

Read these instructions start to finish before beginning installation.

Have at least 2 people mount the display.


Note: If you cannot understand these instructions or are concerned about safety of the installation contact a qualified contractor or contact VFI at 1-877-834-3876

Supplied Parts




- Kit S 42-84
- Kit TV52-70
- Kit Grommet & Adhesive Bumper


Hardware Bag
(3)



Base with wheels
(1)

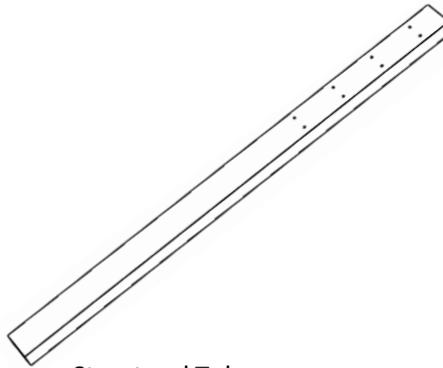

Structural Tube
(1)



Bracket
(1)

Supplied Hardware for Kapp 42




M10 X 35
(4)



M6 X 25
(10)



Adhesive Bumper
(1)




Adhesive Bumper
(2)



Black Spacer
(4)

Tools required



Hex Key M6 (Supplied in Hardware Kit S 42-84)

Hex Key M10 (Supplied in Hardware Kit TV 52-70)


Not all hardware supplied will be used, depending on the manufacturer of your display.

1




Grommet (2)

Place parts on non abrasive surface
Install grommets onto the holes of the tube

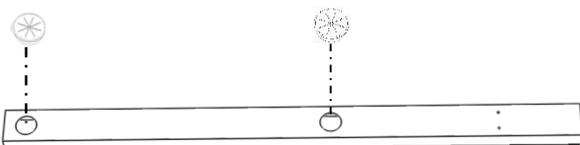

M6 X 25 (6)

Install plate onto the structure tube
Insert M6 x 25 (6) starting from the top
of the tube to position bracket onto highest
height

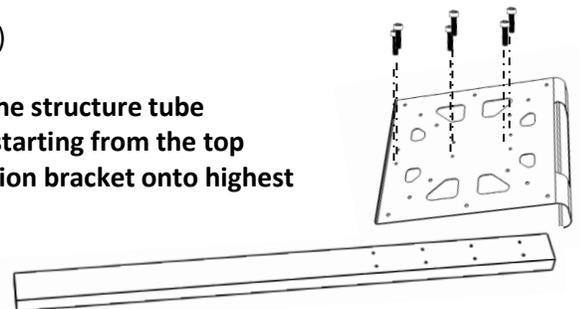


SYZ42 Stand

2

Place parts on non abrasive surface Install base to structure tube

-  M10 X 35 (4)
-  Adhesive Bumper (1)

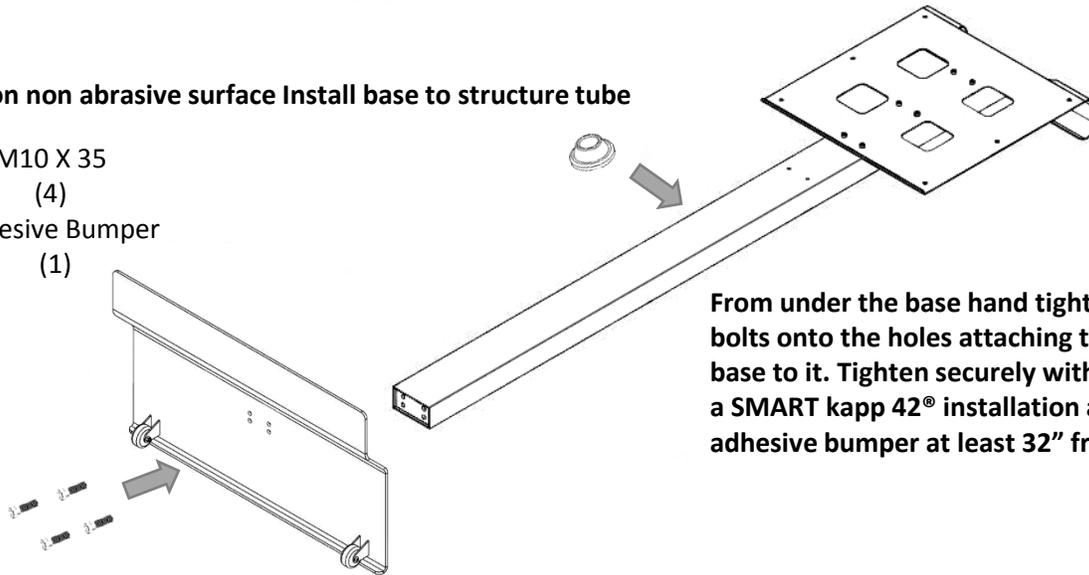


From under the base hand tighten all 4 X M10 bolts onto the holes attaching the structural base to it. Tighten securely with a wrench. For a SMART kapp 42® installation attach the adhesive bumper at least 32" from the base.

3

Lay the monitor on the floor and turn the stand over and place it on top of the monitor


-  M6 X 25 (4)
-  Black Spacer (4)

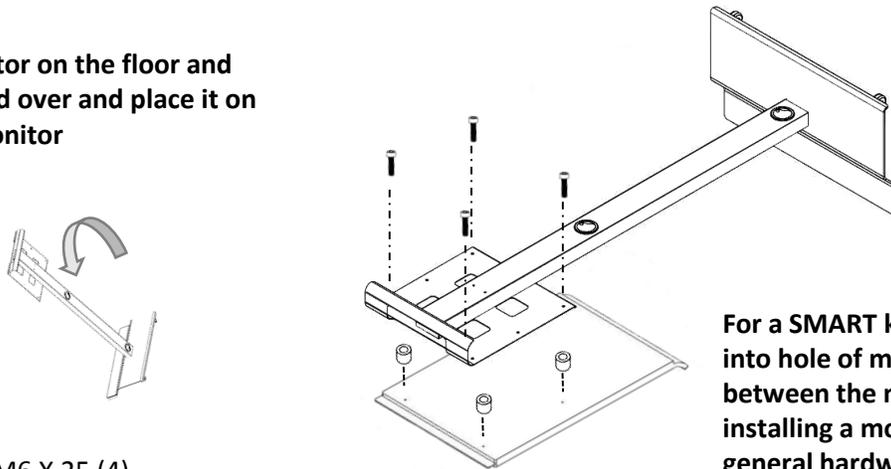

For a SMART kapp 42® insert M6 X 25 (4) into hole of monitor having the spacers in between the monitor and the bracket. If installing a monitor different than a Kapp42 a general hardware kit is included (TV 52-70) Use the Hex key to tighten until there is resistance, then give a half turn. DO NOT OVERTIGHTEN AS THIS CAN DAMAGE OR PUNCTURE THE MONITOR.

4

Lift the stand

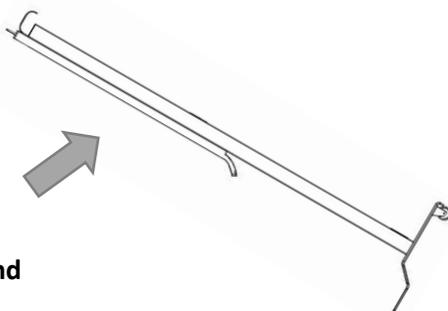

If monitor height is not the desired, adjust where bracket mounts on the structural tube.

Assembly is complete, enjoy your stand