

# 52 Inch Ceiling Fan

(Brushed Nickel)

Project Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Type: \_\_\_\_\_  
Qty: \_\_\_\_\_  
Comments: \_\_\_\_\_


## Product Information

Finish	Brushed Nickel
Blade Finish	Weathered White Walnut

## Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 6.00
Primary Control System	3 Speed Wall Control Full Function
Remote Included	No
Wall Control Included	Yes
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	172 MM X 15 MM
Motor Type	AC

## Dimensions

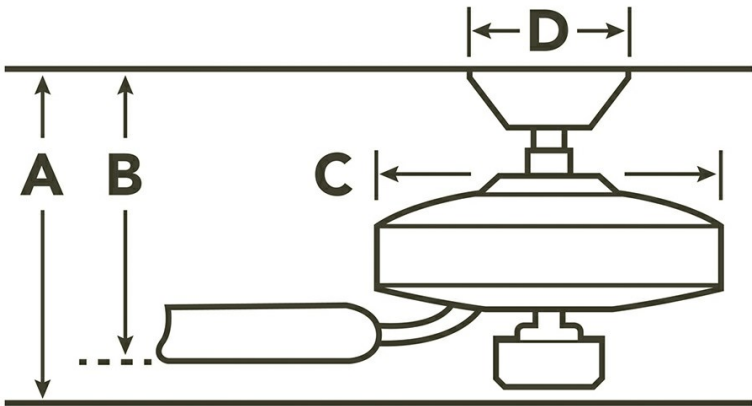

Downrod	A	B	C	D
1.00 OD X 6.00	17.00	12.50	9.50	7.25

## Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

## Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
# of Bulbs/LED Modules	1
Watts	70/9
Initial Lumens	1600
Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Kelvin Temperature	3000K
Color Rendering Index	80

## Safety Listings & Certifications

Safety Rated	Dry
--------------	-----

## Installation

The electrical junction box and support structure must be securely mounted and

**Notes:**  
1) Information provided is subject to change without notice.  
All values are design or typical values when measured under laboratory conditions.  
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

# 52 Inch Ceiling Fan

(Brushed Nickel)

Project Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Type: \_\_\_\_\_  
Qty: \_\_\_\_\_  
Comments: \_\_\_\_\_

Distressed Black	ETCHED CASED OPAL	AUBURN STAINED
Brushed Nickel	ETCHED CASED OPAL	WEATH WHT WLNT

Installation requirements	capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120v 60Hz ac
Minimum Distance Between Bottom Of Fan Blade To Floor	7 feet

**Notes:**  
1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.  
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.