


# ASSEMBLY AND INSTALLATION INSTRUCTIONS(A)

**WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.**

## NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

## 1-LIGHT WALL SCONCE (2 PACK)

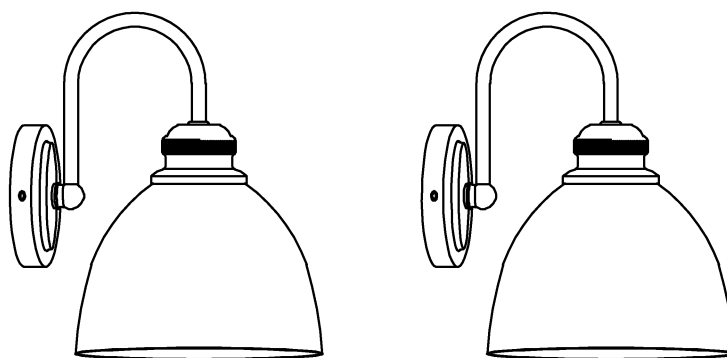

### TOOLS REQUIRED




**Flathead  
Screwdriver**



**Phillips  
Screwdriver**



**Ladder**



**Wire Strippers**



**Pliers**



**Electrical  
Tape**



**Wire Cutters**




**Safety Glasses**

### PREPARATION

**Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. When the lamp is not installed finish, please don't throw away the package, so as not to leave the parts in the package.**

## PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION	QUANTITY
A	Mounting bracket	2
B	Green ground screw	2
C	Outlex box screw	4
D	Wire nut	6
E	Fixture body	2
F	Mounting screw	4
G	Metal shade	2
H	Socket ring	2

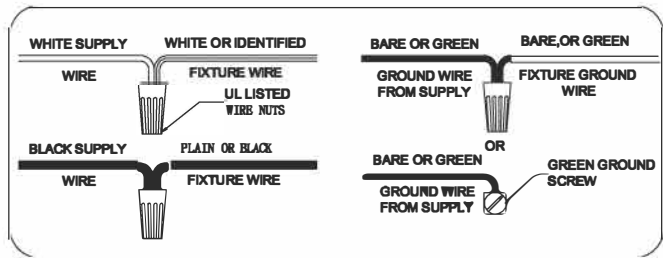

## INSTALLATION

1. Attach the Mounting bracket (A) to the junction box with outlet box screw (C).
2. Attach the supply circuit ground wire (green or bare copper wire) to the the fixture ground wire, black to (black) and white to (white).
3. Attach the fixture body (E) to the mounting plate(A) with mounting screw(F).
4. Attach the metal shade(G) to the socket with socket ring(H).
5. Install the 60W MAX type A19 Bulb (not included) into socket.

