

Do not tighten any bolts until it tells you to use the tool. Fingertip tight only.
It will save you one hour.
You can looes all the screws, just little on the nuts


Please assemble this item as follow the steps strictly

Tips: single alphabet is bar, double alphabet is screws

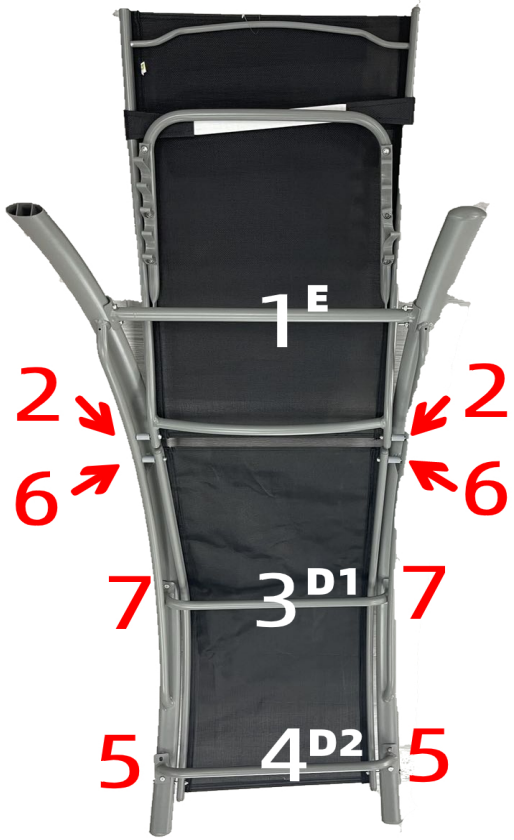


Part	Description	Qty	Part	Description	Qty	Part	Description	Qty
#1		1 pcs	#2		1 pcs	aa	 M6*15mm	16 pcs
bb	 M6*65mm	8 pcs	cc	 M6*70mm	8 pcs	dd	 M6*85mm	8 pcs
ee		8 pcs	ff		24 pcs	gg		64 pcs
hh		24 pcs						


Part	Description	Qty	Part	Description	Qty
A		4 pcs	B		2 pcs
C		2 pcs	D		4 pcs
E		2 pcs	F		2 pcs




SCREW UP




TURNOVER




UNSCREW





Step 1

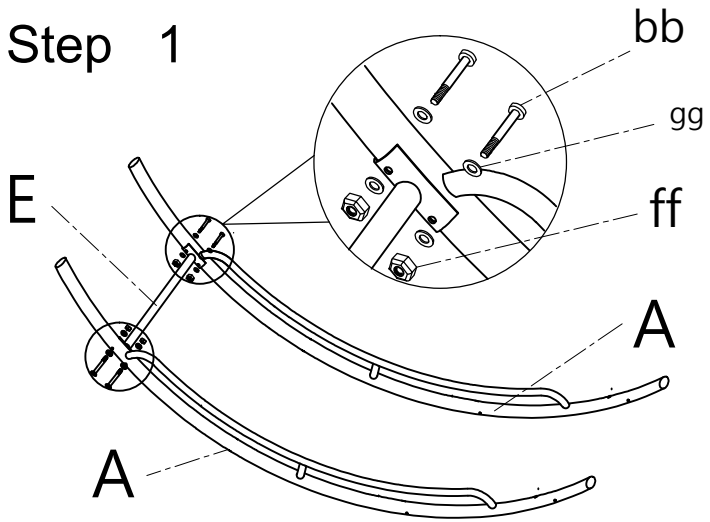





Step 3

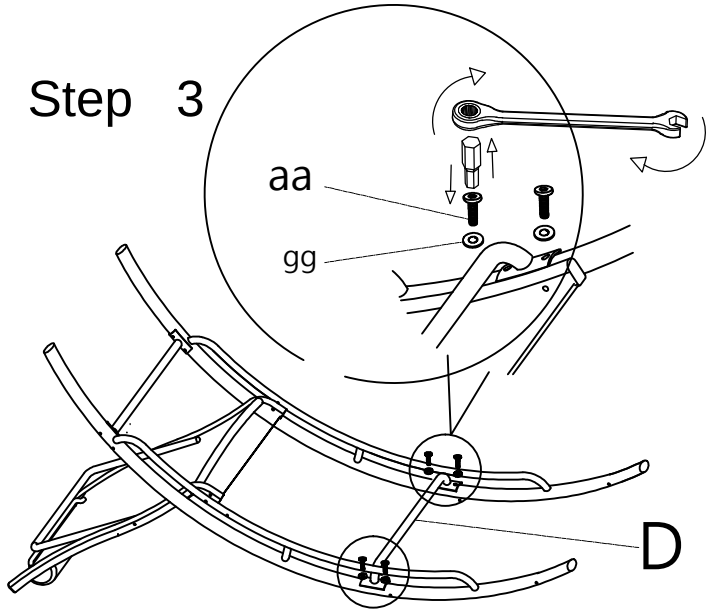





Step 2

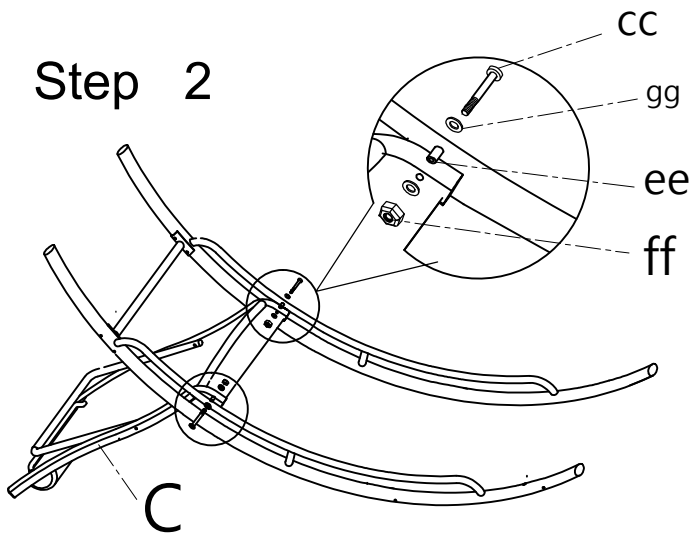




Step 4

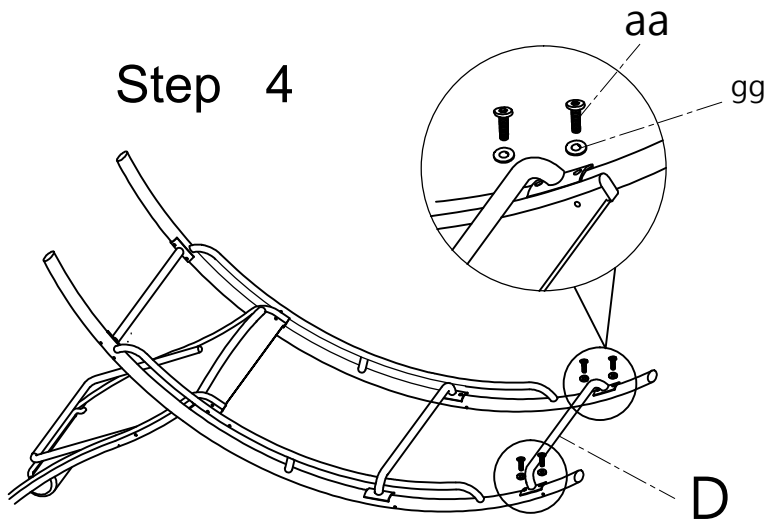




Step 5

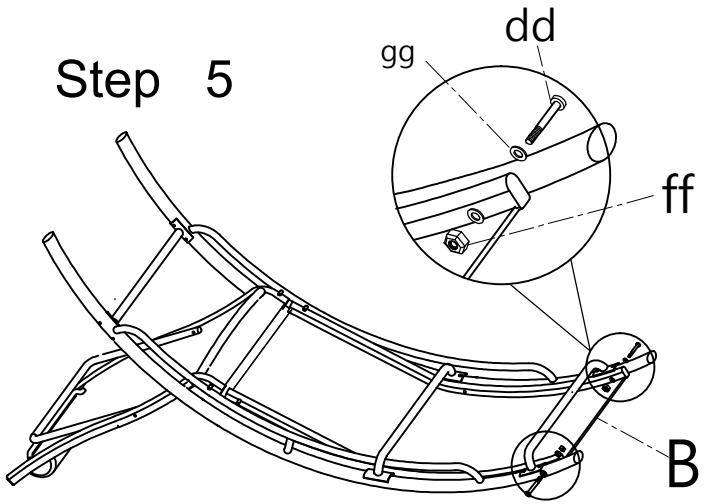


2Person assembly

Step 7

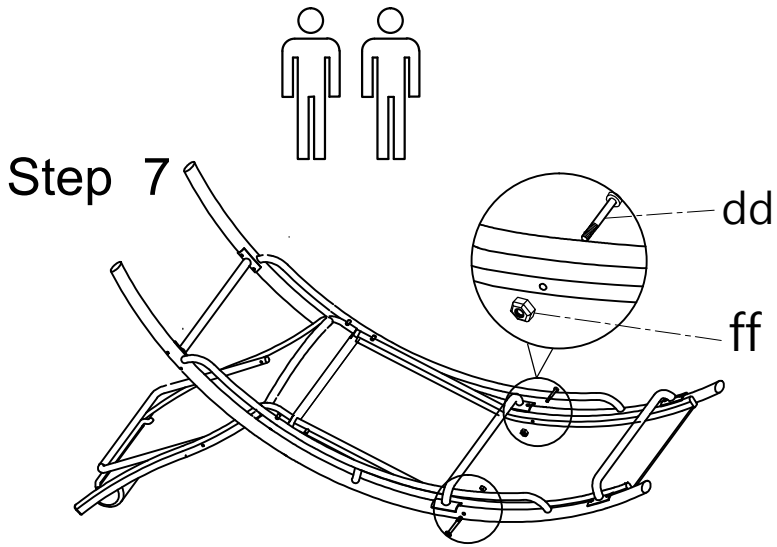


Dont use washers for this step

Step 6

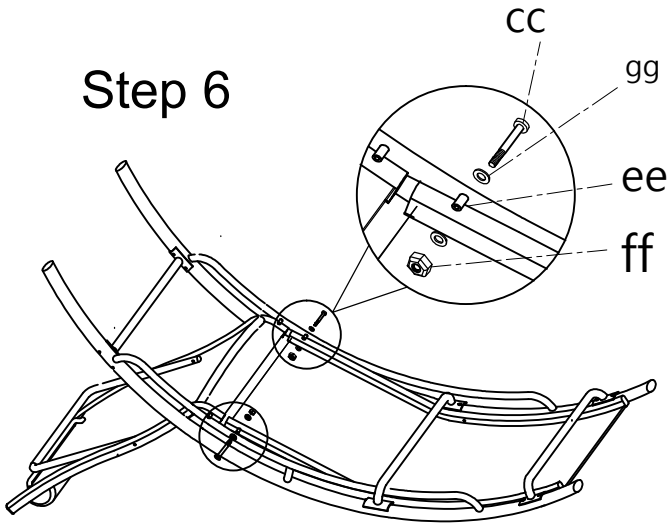

Step 8

Tighten all bolts & nuts

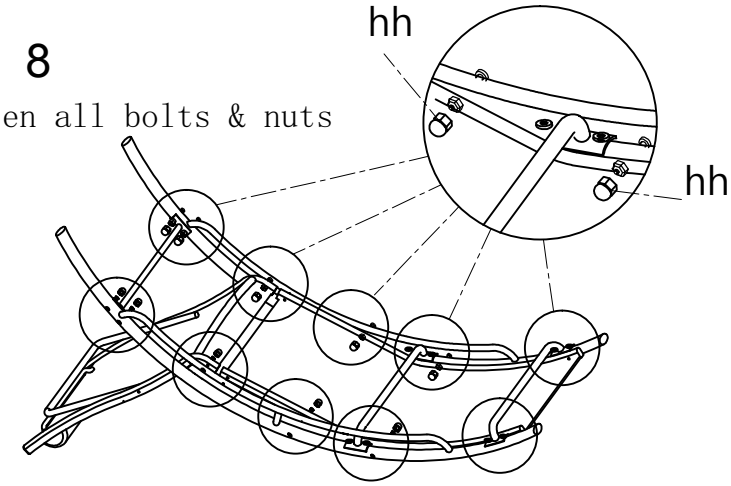

Dear Customer,Thank you for your order.
If you have questions or quality problems during the installation and use,
contact us. We hope our products will give you a great shopping experience.
Thank you!

Q&A

Just remind: Do not tighten too tightly when installing, You should just put the nuts thread to the screws, no more tight. Please tighten after installing. (This is the most important step.)

Q: Why doesn't the hole position match my product? It Can't be installed.
A: You can loose all the screws. Just little on the nuts thread. As the photo shows. And then adjust the shell frame. You will match the holes.



Q: Why I can't fix the middle seat to the shell frame. It has a long distance.
Because we use high-quality Teslin cloth, based on the micro-elasticity of Teslin cloth.
To prevent for long time using, the cloth will be loosed and the fabric of the seat will sink, which will affect the appearance and comfort.
A: Step 1: Loose all the screws. Just little on the nuts thread. As the up photo shows.
Step 2: Fix the shell frame as the instruction. And then put the two feet seat together first,Keep this Step about 12 hours. (make sure to Keep the seat fabric in a stretched state.)
Step 3: You can fix the middle seat nuts thread as the instruction shows.

Q: The plastic part of my backrest is crooked. The location is incorrect.
A: You can use the tool to loose the nuts thread of the plastic parts, and adjust the position to correct.