



Pagoda Arbor


(PA96U Unassembled Kit)

Tools Required:

For your convenience we use Recex rust resistant zinc plated hardware.
You will need a #2 Philips or Robertson screwdriver a 1/2" wrench.

Package Contents:

- (A) Posts... 4
- (B) Pagoda Header... 2
- (C) X-Member... 4
- (D) Long Slat... 6
- (E) Short Slat... 14
- (F) Canopy Slat... 9
- (G) Corner Brace... 4

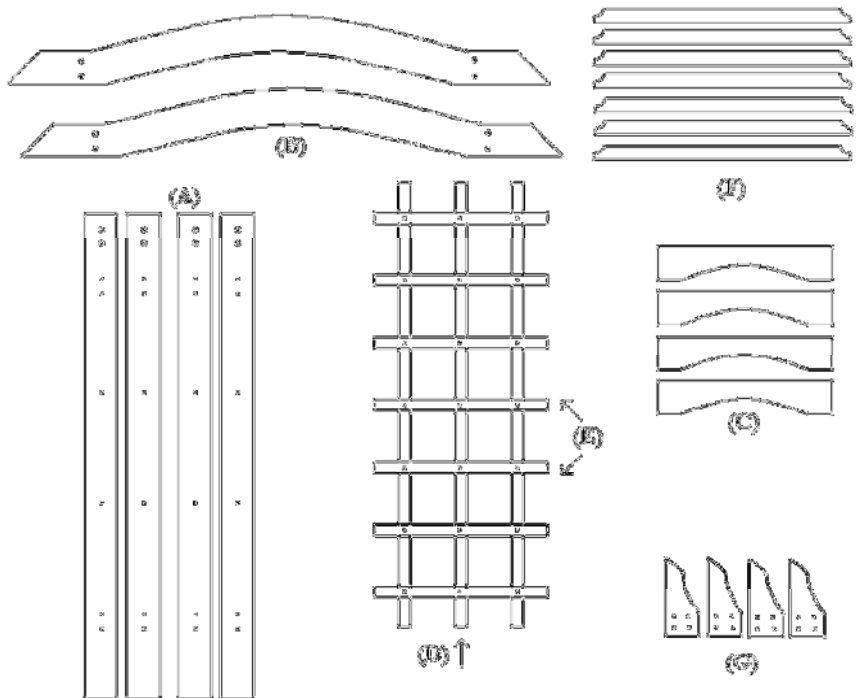


Hardware:

- 2" screw... 64
- 2-1/2" Screw... 42
- Carriage Bolt... 8
- Washer... 8
- Hex Nut... 8


STEP 1. Build Frame

- Set 2 posts on edge and place two x-members between them.
- Arrange scallop cutouts to face each other
- Center x-members on post and attach 6 inches from each end using 2-1/2 inch screws.
- Repeat for other frame

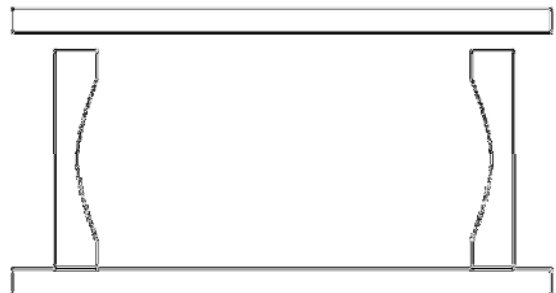

STEP 2. Insert Lattice


- Place 3 long slats (D) inside frame assembly from step 1.
- Arrange 7 short slats (E) across long slats.
- Line up 2 of the short slats with pre-drilled holes on face of post.
- Arrange remaining slats approx. 5-1/2 inches apart.
- Attach slats together using 2 inch screws.
- Center lattice panel on frame and attach to frame using 2-1/2 inch screws.
- Repeat for other lattice panel.

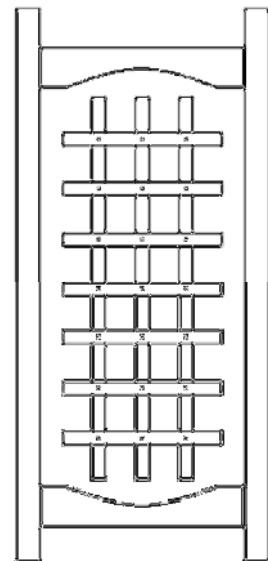

STEP 3. Build Canopy

For convenience use the Lattice Frame as a “go-between template”. Set the frame between the two Headers.

- Arrange the two headers so that the canopy slats can be placed across them.
- Line up the 1st slat with start lines marked on top of headers.
- Space remaining slats 6 inches apart and attach using 2-1/2 inch screws.

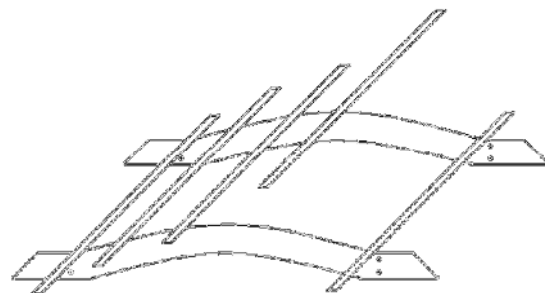

STEP 4. Assemble Pagoda Arbor

- Tip the assembled canopy on edge and slip the two frames between the canopy headers.
- Take care that the finished face of the lattice panels are facing out.
- Align bolt-holes and bolt the canopy to the frames using carriage bolts, washers and nuts.
- Set arbor onto its legs - adjust for ground level and tighten all carriage bolts.
- Position the four corner braces along the top inside corner of the canopy header and post and attach using 2 inch screws.
- Your arbor can be attached to a fence, anchored to the ground with 3' metal or wooden stakes or fitted with rebar post anchors available at a hardware store.

