

NOTICE

- *Please make sure that you have all parts indicated and they are in good condition before you begin assembly of this item. Refer to part list and hardware list below for guidance.
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly.
- * This item may require periodic tightening.
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email













PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 10 minutes.
- * Tools Required for Assembly (included): Allen Key

CARE AND MAINTENANCE

Wipe clean with a soft, dry cloth. The seat board can be cleaned with a mild cleaner.
Test the cleaning method on a hidden area before using them over the entire area.

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Back Cushion		1X
B	Seat Cushion		1X
C	Arms (R & L)		1X(R,L)
D	Control Mechanism		1X
E	Cylinder Column		1X
F	Bellows		1X
G	Star Base		1X
H	Caster		5X
HW1	Short Screw 6×1×20mm		4X
HW2	Long Screw 6×1×35mm		10X
HW3	Washer 6.5mm		14X
HW4	Allen Wrench		1X


Product Dimensions: 24.4"W*27.8"D*43.3~47"H



Weight Capacity:275 lbs
WARNING:DO NOT STAND ON CHAIR


PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 10 minutes.
- * Tools Required for Assembly (included): Allen Key
- * If you are having difficulty, our friendly Customer Care team is always here to help.

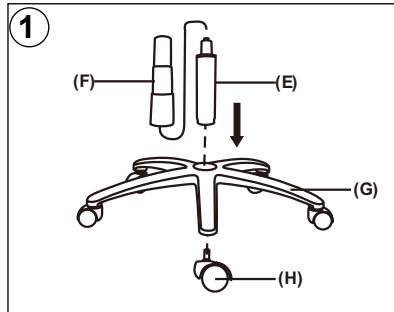


Step 1

Insert five Casters (H) into Star Base (G), push hard until you feel or hear the Caster(H) snap into place. Insert the LARGE end of Cylinder Column (E) with the bellow(F) into the Star Base (G) and carefully press downward with moderate force until it is fully seated.

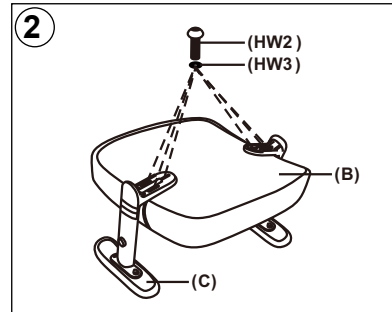


Step 2

Connect the armrests(C) to seat(B) by using six Long Screws(HW2) and six Washers(HW3)

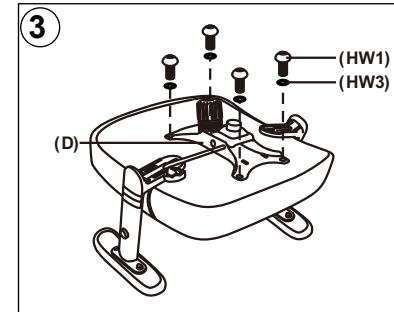

Step 3

Attach Control Mechanism (D) to Seat Assembly (B) with the arrow towards the front of the chair, using four Washers (HW3) and four Short Screws (HW1).

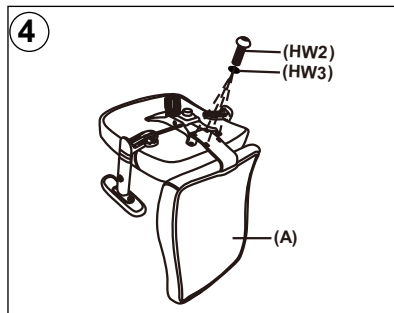

Step 4

Assemble the Seat(B) to the Back(A) together, using four Long Screws(HW2) and four Washers(HW3).

FULLY TIGHTEN ALL SCREWS USING ALLEN WRENCH



Step 5

Now insert the small end of Cylinder Column (E) into Control Mechanism (D) and carefully press downward with moderate force until it is fully seated.



Step 6

The chair is ok now.

ATTENTION: MAKE SURE ALL SCREWS ARE FULLY TIGHTENED BEFORE USING CHAIR