
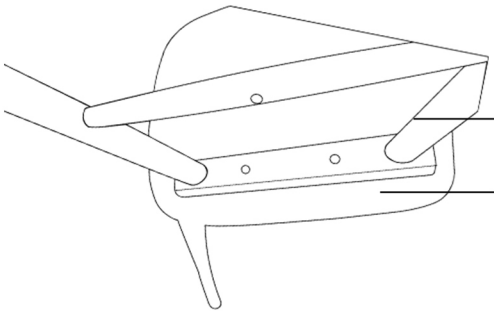
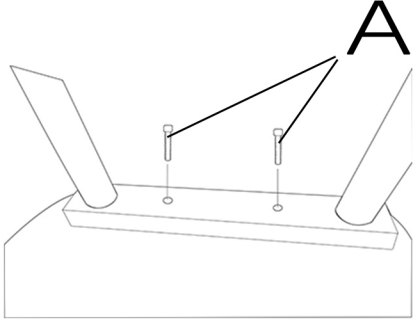

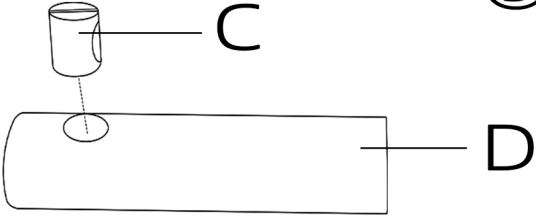
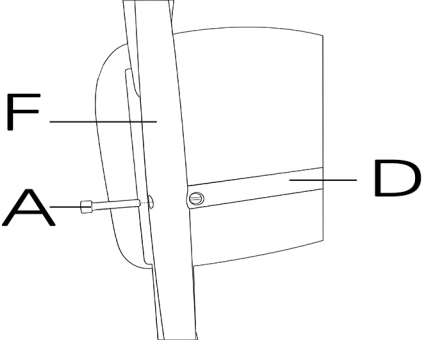

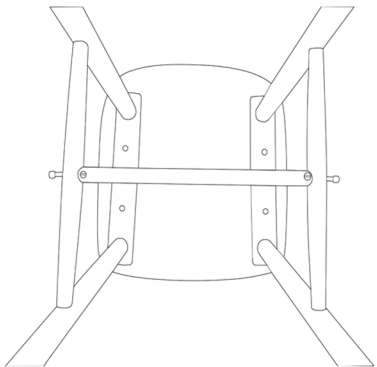
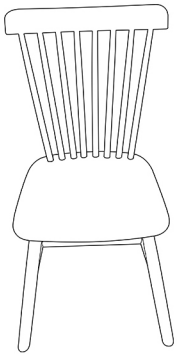






Installation instructions

 <p>A x6</p>	 <p>① F E</p> <p>1. Put the stool leg F with the seat plate E Place as shown.</p>	 <p>A ②</p> <p>2. Cover flat pad B on bolt A On, as shown in the figure Tighten the.</p>
 <p>B x6</p>	 <p>③ C D</p> <p>3. Nut C is placed in cross D Inside the round hole, pay attention to the nut Groove direction.</p>	 <p>④ F A D</p> <p>4. Put accessories A and B in accordance with Here is a tight</p>
 <p>C x2</p>	 <p>⑤</p> <p>5. Repeat steps ②, ③, ④, the other side of the stool leg F Secure and tighten.</p>	 <p>⑥</p> <p>6. assembled.</p>
 <p>D x1</p>	 <p>F x2</p>	
 <p>E x1</p>	 <p>G x1</p>	