



Flipside® | K-45427-G

Four-function showerhead, 1.75 gpm

Features

- Flipstream® technology uses a single sprayhead for four unique, experiential spray patterns; Koverage™, Kotton™, Komotion™, and Kurrent™
- Changing sprays is as easy as turning the head on its axis
- 1.75 gpm (6.6 lpm) maximum flow rate
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System



Sustainability



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 20:35 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Flow Rate

Shower/Rainhead Rated 1.75 gpm (6.6 l/min)

Maximum Flow:

Handshower Rated Maximum 1.75 gpm (6.6 l/min)
Flow:

Recommended Products/Accessories

K-23723 Faucet cleaner


K-7395 Shower arm and flange, 5-3/8" long

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



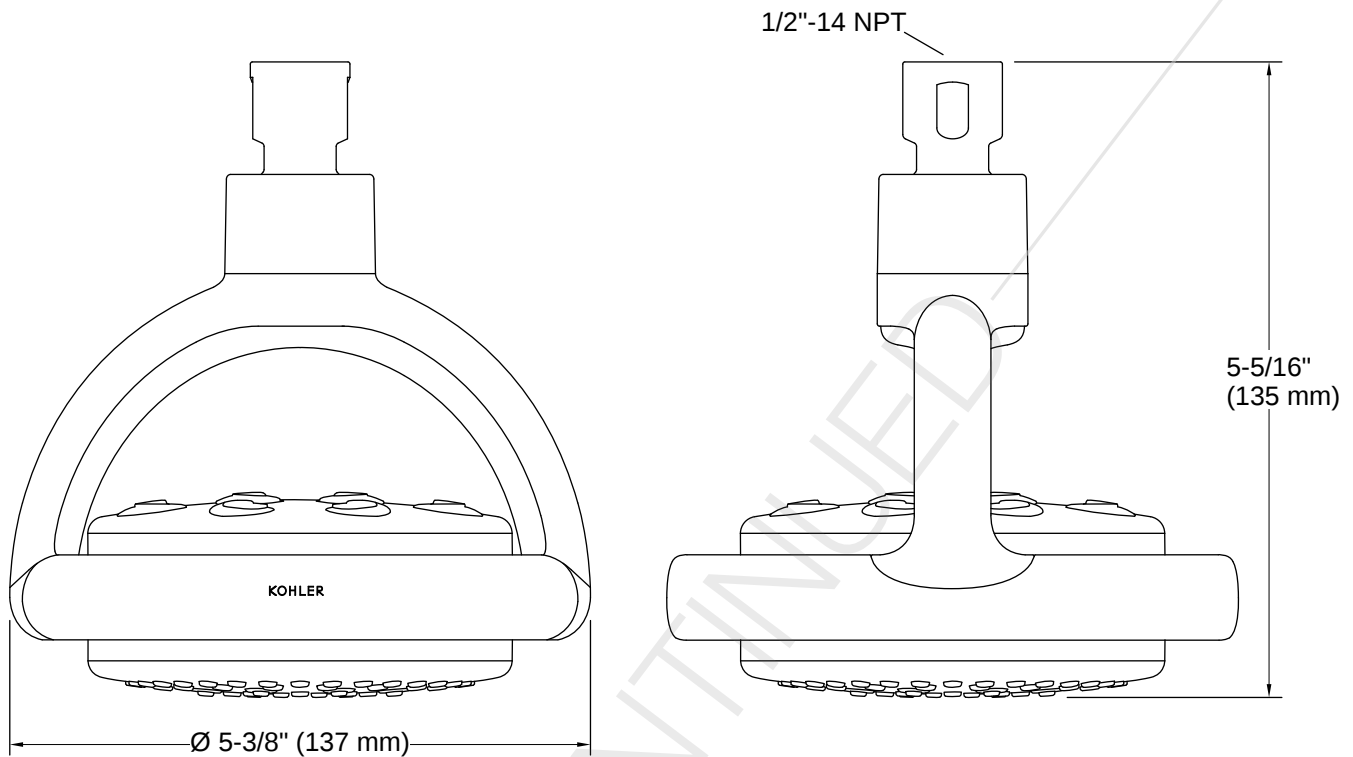

Installation

- 1/2" -14 NPT connection
- Shower arm and flange sold separately

Installation Notes

Install this product according to the installation instructions.

