

## Drake® WASHLET®+ S550e Close Coupled Toilet - 1.6 and 0.8 GPF - 10" Rough-in

### FEATURES

- Concealed supply connection for seamless installation
- DYNAMAX TORNADO FLUSH® utilizes 360° cleaning power to reach every part of the bowl
- Dual flush 1.6 & 0.8 GPF (6.0 & 3.0 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Design of the bowl reduces water flow resistance resulting in a quieter flushing sound
- Universal Height
- 10" Rough-in
- Chrome plated trip lever
- Elongated front bowl and WASHLET+ S550e and tank set
- EWATER+® auto-cleans wand and bowl
- On-demand remote function cleans wand with EWATER+ PREMIST of bowl before each use
- Remote control operated
- Auto Open / Close Lid
- Night light
- Auto Flush available as upgrade
- Semi-concealed trapway



### MODELS & COMPONENTS

- **MW7463056CSMFGA.10 (#01)**  
With CEFIONTECT ceramic glaze, WASHLET+ S550e with contemporary design and Auto Flush
  - **CT746CUFGT40.10**  
Elongated bowl with CEFIONTECT
  - **ST746SMA**  
Tank and cover only
  - **SW3056AT40**  
WASHLET+ S550e
  - **THU765**  
Auto Flush Kit
- **MW7463056CSMFG.10 (#01)**  
Same as MW7463056CSMFGA.10 without Auto Flush
  - **CT746CUFGT40**  
Elongated bowl with CEFIONTECT
  - **ST746SMA**  
Tank and cover only
  - **SW3056AT40**  
WASHLET+ S550e

#### Optional Components

- **THU773#01**  
Trip Lever - Cotton
- **THU773#PN**  
Trip Lever - Polished Nickel
- **THU773#BN**  
Trip Lever - Brushed Nickel

### COLORS/FINISHES

- #01 Cotton

- DYNAMAX TORNADO FLUSH**
- EWATER+**
- CEFIONTECT**
- Auto Flush**
- Universal Height**

### PRODUCT SPECIFICATION

The DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.6 GPF/0.8 GPF. Toilet shall be 10" rough-in. Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl and Polished Chrome trip lever. Toilet shall be TOTO Model MW7463056CSMFG\_\_\_\_\_.

See SW3056AT40 Specification Sheet for details on included WASHLET.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



# MW7463056CSMFG(A).10

## Drake® WASHLET®+ S550e Close Coupled Toilet - 1.6 and 0.8 GPF - 10" Rough-in

### SPECIFICATIONS


<b>Water Use</b>	1.6 & 0.8 GPF (6.0 & 3.0 LPF)
<b>Flush System</b>	DYNAMAX TORNADO FLUSH®
<b>Min. Water Pressure</b>	8 psi (Flowing)
<b>Water Surface</b>	5-5/8" x 4-1/8"
<b>Trap Diameter</b>	2-1/2"
<b>Rough-in</b>	10"
<b>Trap Seal</b>	2-1/8"
<b>Warranty</b>	One Year Limited Warranty
<b>Material</b>	Vitreous China
<b>Shipping Weight</b>	CT746CUFGT40.10 64 lbs. ST746SMA 35 lbs.
<b>Shipping Dimensions</b>	CT746CUFGT40.10 18-3/4" L x 10-1/2" W x 18-1/8" H ST746SMA 18-3/4" L x 8-3/8" W x 16" H

See SW3056(A)T40 Specification Sheet for details on included WASHLET.

### INSTALLATION NOTES

Back-to-Back Toilet Installations:


TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

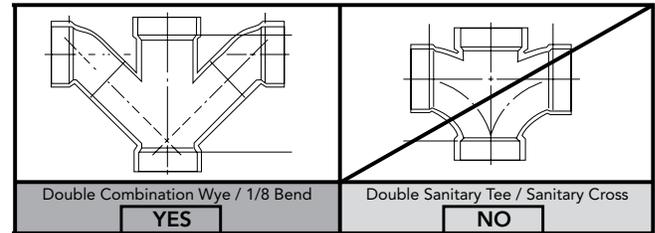

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 10" rough-in distance.

Ultra-low high efficiency toilets require a system with adequate supplemental flows from other water usage fixtures and a 4" ID drainline with minimum 2% slope and maximum linear runs of 60ft. Fixture Dimensions shown are nominal.

### DIMENSIONS

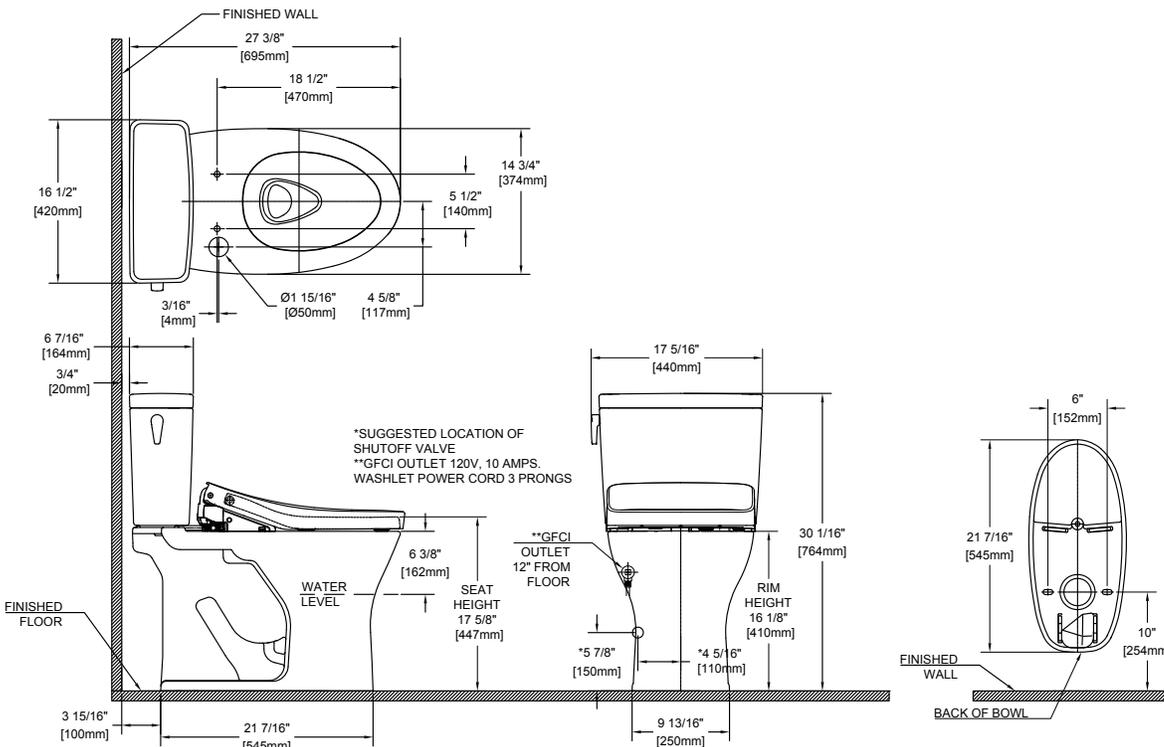

**TOTO®**

These dimensions and specifications are subject to change without notice