


IMPORTANT SAFETY INSTRUCTIONS


- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure electricity is turned off at:
 - Wall switch
 - The main circuit breaker panel. **Note:** Some types of fuses must be unscrewed to shut the power off.

Compatible Bulbs

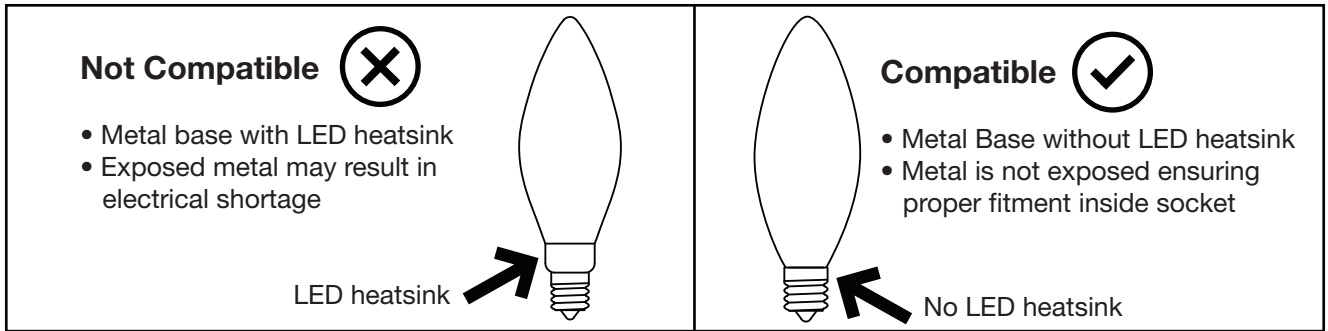

- **Unpack the Fixture:** Check the contents of the box. Box should contain all items below.

***Connect the ground wire (bare copper or green) from your fixture to the ground wire (copper or green) or ground screw in the electrical outlet box.**

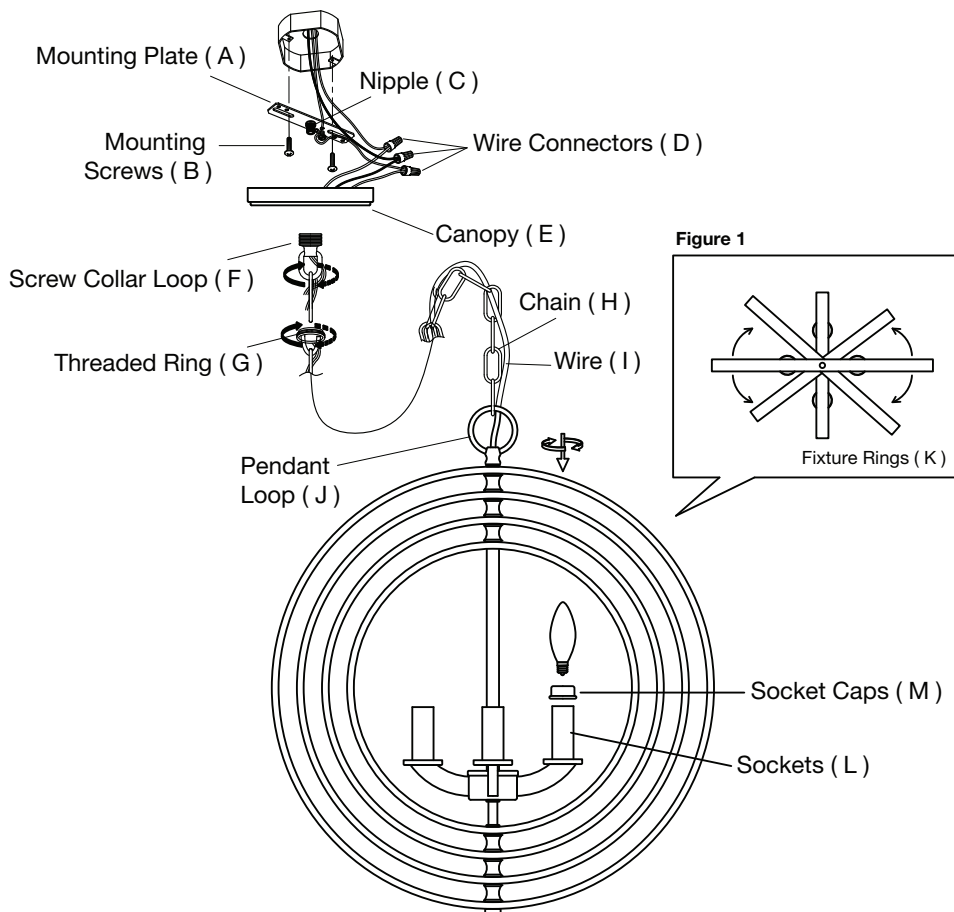




- 1 Screw Pendant Loop (J) to top of fixture.
- 2 Spread Fixture Rings (K) evenly as shown in Figure 1.
- 3 Fasten Mounting Plate (A) to the junction box using the Mounting Screws (B) provided.
- 4 Remove Threaded Ring (G) from Screw Collar Loop (F).
- 5 Place Canopy (E) against the ceiling and adjust Screw Collar Loop (F) along with the hex nut above it, until 3/8" of the threaded portion is visible. Remove Canopy (E) after Screw Collar Loop (F) has been properly adjusted.
- 6 Assemble one end of Chain (H) to Pendant Loop (J) by opening the chain link and closing it around Pendant Loop (J) with pliers.
- 7 Cut Chain (H) and Wire (I) to desired hanging length, leaving an additional 10" of Wire (I) beyond Chain (H).
- 8 Weave Wire (I) through every 5 links in Chain (H). Slide Threaded Ring (G) down Chain (H) ensuring the flange (raised end) is facing up. Slide Canopy (E) down Chain (H).
- 9 Attach top end of Chain (H) to Screw Collar Loop (F) by lifting the fixture, opening the chain link, and closing it around Screw Collar Loop (F) with pliers.
- 10 Insert Wire (I) through the hole in Screw Collar Loop (F) and Nipple (C) into the junction box.

- 11 Using the wire graphs below, connect the appropriate wires with Wire Connectors (D) provided, to the corresponding wires in the junction box.

Note: Positive wire is round and smooth, neutral wire is ribbed/ridged.

Make wire connections. Reference chart below:

Connect to BLACK house wire	Connect to WHITE house wire
round & smooth cord 	ribbed / ridged cord 

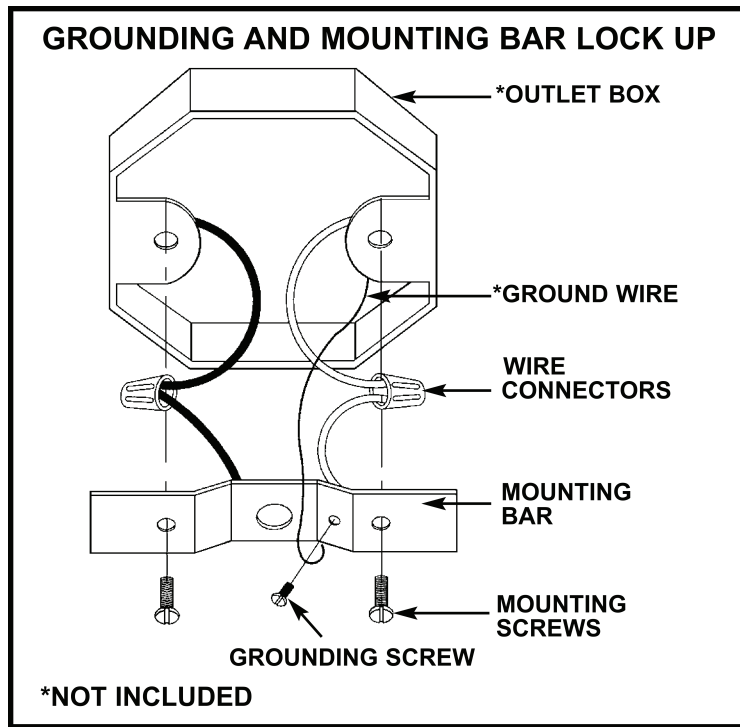

- 12 Slide Canopy (E) up Chain (H) and place it against the ceiling. Slide Threaded Ring (G) up Chain (H) and screw it onto Screw Collar Loop (F), holding Canopy (E) in place.

- 13 Place Sockets Caps (M) on Sockets (L) and screw in light bulbs (not included).
Note: Please refer to Compatible Bulbs section for appropriate bulb application.

Enjoy your new fixture!