

**2" Square Regressed Gimbal LED 5W**



**Type IC, Wet & Air-Tight**

**DESCRIPTION**

2" Square Recessed Gimbal LED  
With Integral Driver In Connection Box  
Unique & Patented Design:  
Gimbal Yet Air-Tight Without Housing Needed


**FEATURES & BENEFITS**

1 3/4" Deep - Install Where Ceiling Space Is Limited  
Type IC Rated - No Housing Required  
Fast & Easy To Install - Save On Labor  
Driver Inside Connection Box - No Junction Box Needed  
Directional Beam - Great for Sloped Ceilings and Artwork  
CRI 90+ for True Color Rendering

**MOUNTING**

Cut Hole In Ceiling And Snap Fixture In Opening  
With Attached Spring Clips  
Ceiling Clearance Required:  
1 1/2" With Driver Remotely Installed  
5" When Driver Is Next To The Fixture

**DIMENSIONS:** ID 2 1/2" OD 3" SQ Cut Out 2 1/2" to 2 3/4"

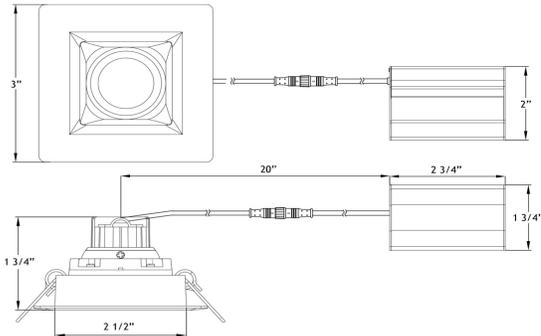

Driver Included Cable Rating FT4 / CMR



**ORDERING GUIDE** Example: **LSG2 - 30K - WH**

LSG2	CCT	Trim Finish	
2700K	<b>27K</b>	<b>WH</b>	White
3000K	<b>30K</b>	<b>BK</b>	Black
4000K	<b>40K</b>		

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

SPECIFICATION	
Applications	Cabinets, Recessed Alcoves
Energy Used	5 W
Color Temperature	2700   3000   4000
Light Output	380   400   430
Halogen Equivalent	35 W
Beam Angle	24° Beam with 20° tilt and 360° rotation
CRI	90 +
Driver Input	120V AC 50/60 Hz
Power Factor	0.95
Dimming	TRIAC Dimmers 5% - 100%
Approved Location	Insulated Ceiling & Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus Energy Star T24
Warranty	10 Year on Residential 5 Year on Commercial Applications

**AVAILABLE TRIMS**



White



Black

**ACCESSORIES** Sold Separately



Low Voltage Extension Cables  
6ft - cat # **EXC6**, 20ft - cat # **EXC20**  
Max 40 ft Allowed. FT4 / CMR rated



Rough-In Plates - cat # **RIP212**

**COMPLIANCE**



**Type IC  
Air-Tight**

USA Patent # US 10,344,952 B2 | Canada Patent # 2,967,954