


IMPORTANT SAFETY INSTRUCTIONS

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box. Note: Some types of fuses must be unscrewed to shut the power off.

! For any replacement parts or installation issues, please contact us.

*** Connect the ground wire (bare copper or green) from your fixture to the ground wire (copper or green) or ground screw in the electrical outlet box.**



Unpack the Fixture: Check the contents of the box. Box should contain all items below.

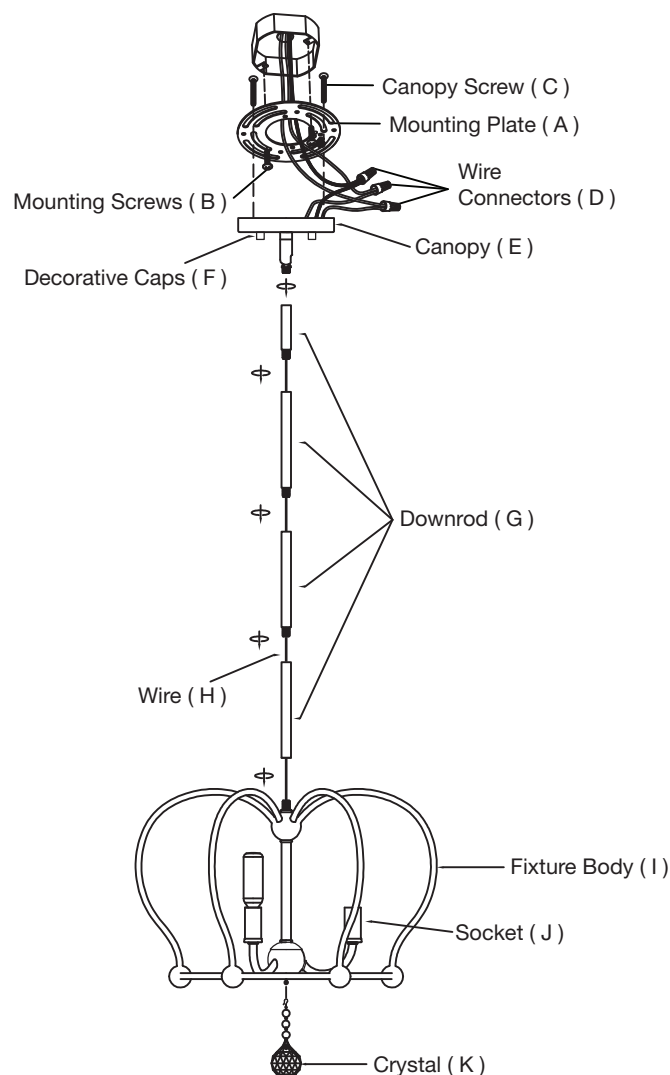

ASSEMBLY:

- 1 Secure Mounting Plate (A) to junction box using Mounting Screws (B) provided. Mounting Plate (A) should be positioned with Canopy Screws (C) pointing away from junction box.
- 2 Place Canopy (E) against the ceiling by inserting Canopy Screws (C) through the appropriate holes located on Canopy (E). Adjust Canopy Screws (C) and hex nuts until 1/4" of the threaded portion is visible. Remove Canopy (E) once Canopy Screws (C) have been adjusted.

- 3 Determine desired hanging length using Downrods (G).
- 4 Thread Wires (H) through Downrods (G). Secure Downrods (G) to the top of Fixture Body (I).
- 5 Thread Wire (H) through Canopy (E). Secure Downrods (G) to Canopy (E).
- 6 Remove any excess Wire (H), leaving an additional 10 inches beyond Canopy (E).
- 7 Using Wire Connectors (D) and the wire diagrams below, connect the appropriate fixture wires to the wires in the junction box.

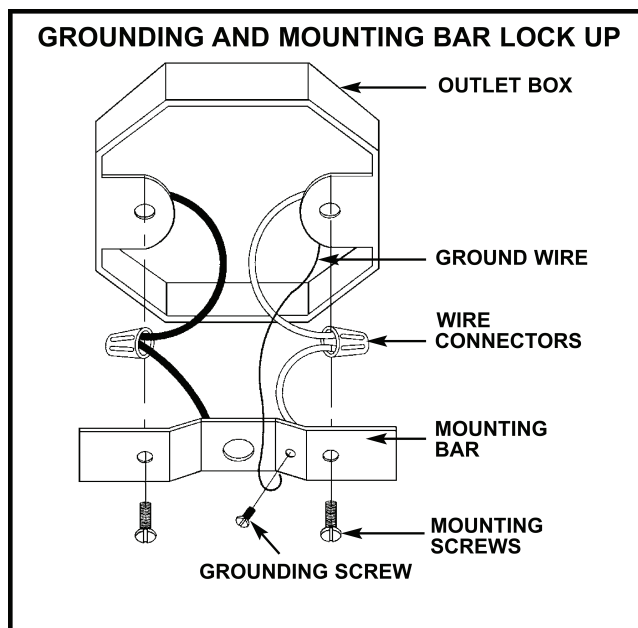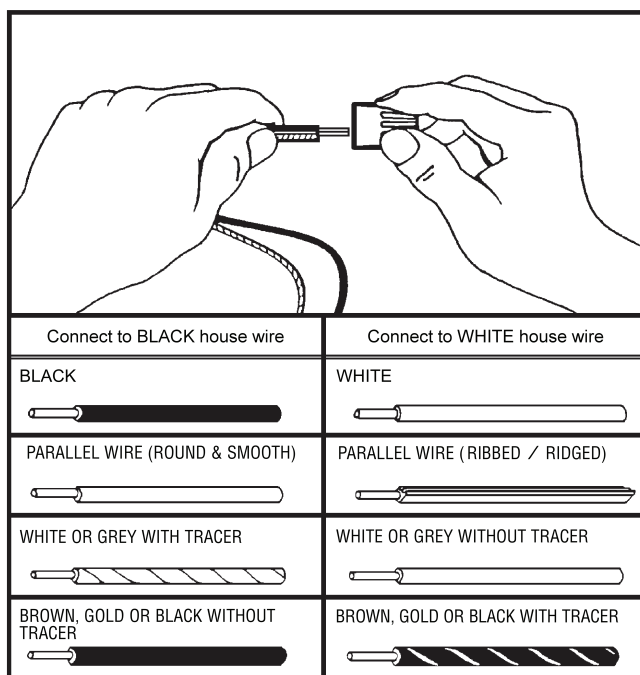

- 8 Place Canopy (E) against ceiling, ensuring Canopy Screws (C) are protruding through the holes on Canopy (E) and secure in place using Decorative Caps (F).
Note: If Canopy (E) does not sit flush against the ceiling, remove Canopy (E) and readjust Canopy Screws (C) and hex nuts.
- 9 Secure Crystal (K) to bottom of Fixture Body (I).
- 10 Install light bulb (not included) onto Socket (J).
Note: If Socket (J) is not fully upright, gently straighten with little pressure.

Enjoy your new fixture!