
CONVENIENCE CONCEPTS

DILLON ROLL CHAIR
310922

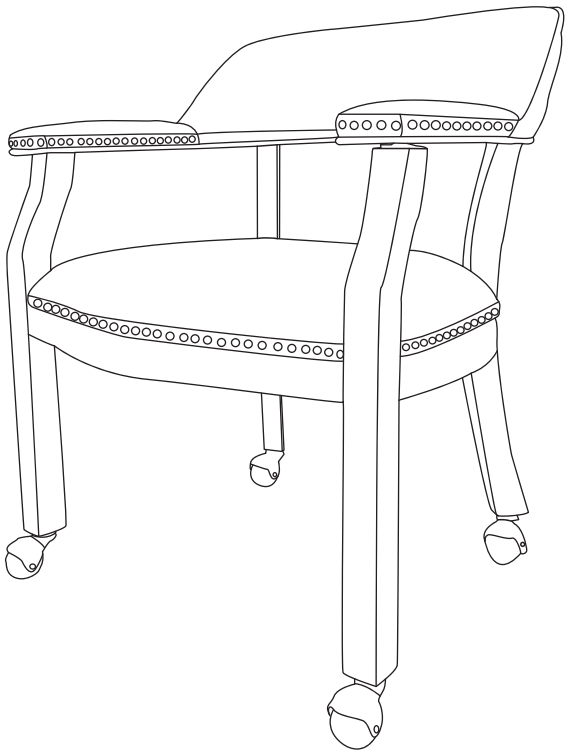

SCAN QR CODE FOR
E-MANUAL, IF DESIRED

ASSEMBLY INSTRUCTIONS

We have designed our furniture with you , the customer in mind . Our clear , easy to follow , step by step instructions will guide you through the project from start to finish .
Feel confident that this will be a fun and rewarding project . The final product will be a quality piece of furniture that will go together smoothly and give years of enjoyment .

STOP







Please do not return to the store

Broken or missing parts?


Need help with assembly?

Our Illinois based customer service team is ready to help with any problems or questions you may have.
Please give us a call (Toll Free) at 1-800-468-6447, or email us at parts@convenience-concepts.com.
Normal hours of Operation: M-F* 8am-4pm CST.
*Excludes Holidays
This product's warranty is only valid through authorized dealers.


Hardware List

Ⓐ 	Ⓑ 	Ⓒ 	Ⓓ  M8X80
Allen wrench (1pc)	Spring washer (8pcs)	Flat washer (8pcs)	Long Thick Bolt (4pcs)
Ⓔ  M8X55	Ⓕ  M6X20		
Thick Bolt (4pcs)	Short Bolt (6pcs)		

Panel List

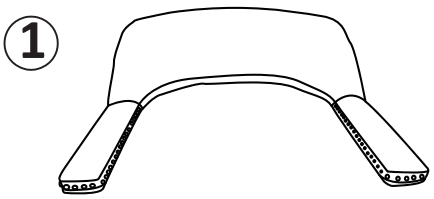


Back Rest (1pc)

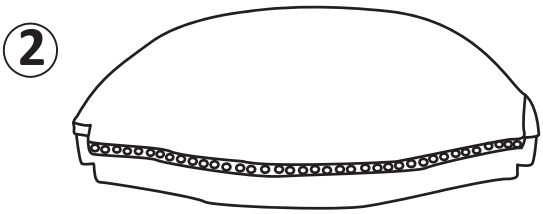


Seat (1pc)



Left Front Leg (1pc)

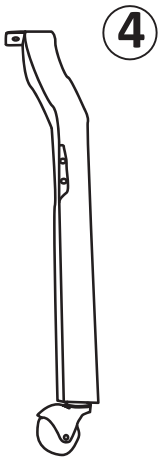

Right Front Leg (1pc)

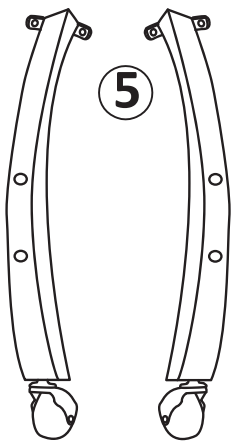


Rear Leg (2pcs)

Step 1

1.Flip the Seat(2) upside down and attach the Left Front Leg(3) and Right Front Leg(4) as shown using the Long Thick Bolts(D), Spring Washers(B), and Flat Washers(C) with the Allen Wrench(A).

Do Not Fully Tighten the bolts in this Step, only tighten the bolts 80% at this point

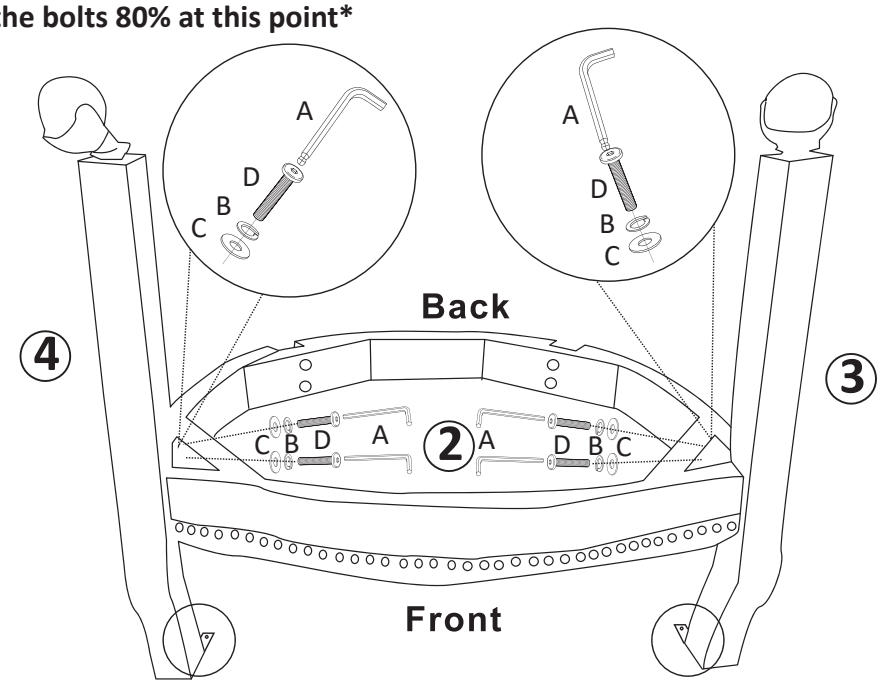

D x 4

B x 4


C x 4

A x 1

Step 2

1. Attach the Two Rear Legs (5) as shown using the Thick Bolts (E), Spring Washers (B) and Flat Washers (C) with the Allen Wrench (A)

Do Not Fully Tighten the bolts in this Step, only tighten the bolts 80% at this point

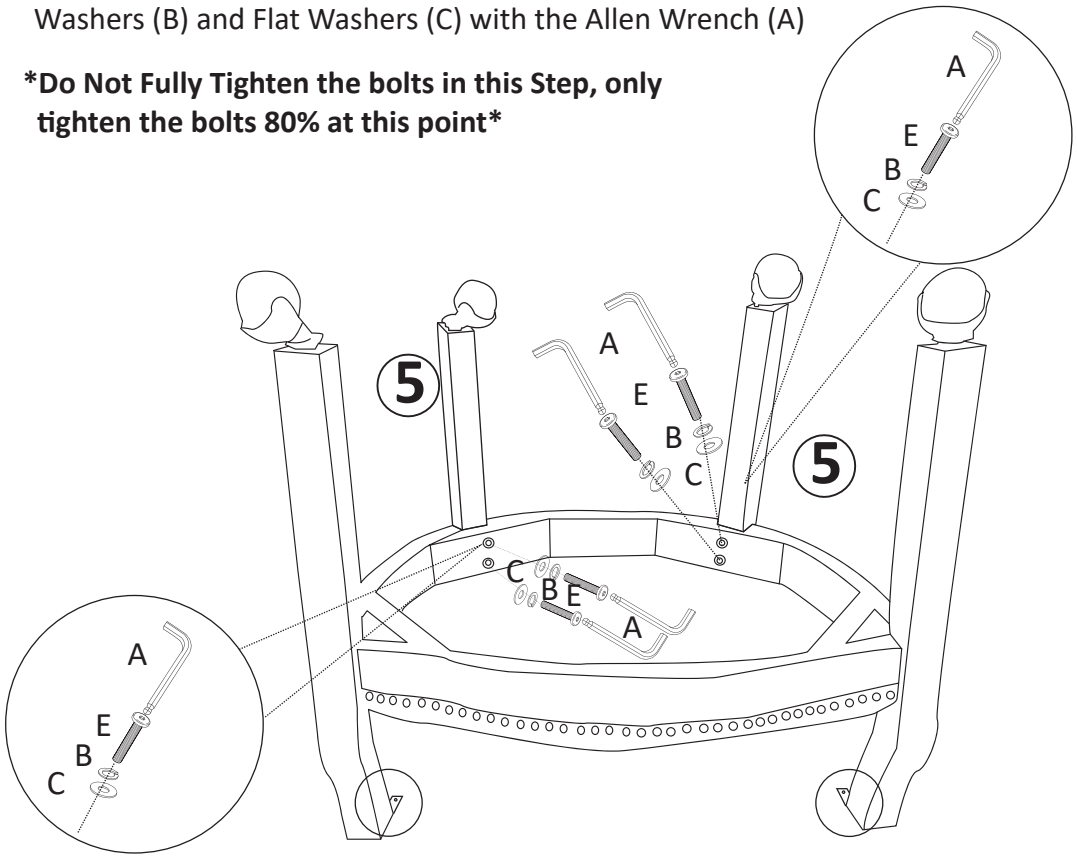

E x 4

B x 4


C x 4

A x 1

Step 3

1. Attach the Two Front Legs (3) and (4) using the Short Bolts (F) to the Back Rest(1), with the Allen Wrench as shown.

Do Not Fully Tighten the bolts in this Step, only tighten the bolts 80% at this point

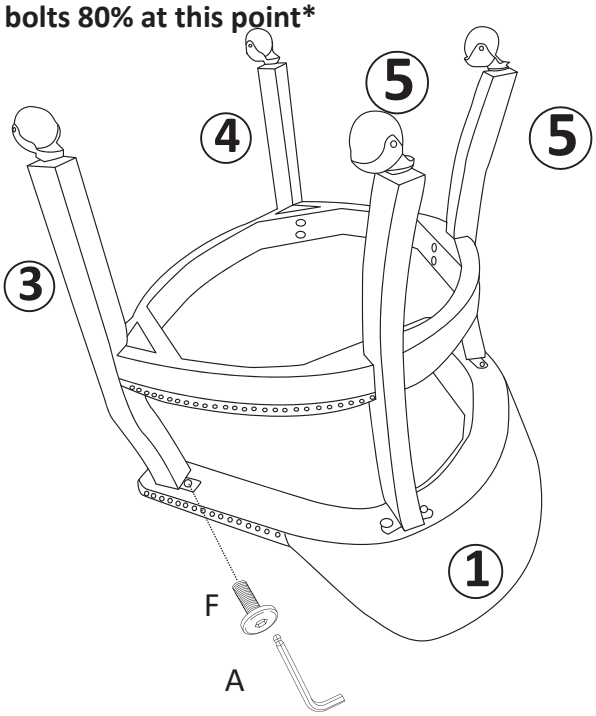


A x 1

F x 2

Step 4

1. Attach the Two Rear Legs (5) using the Short Bolts (F) to the Back Rest (1), with the Allen Wrench as shown.
2. Once all Four Legs are attached to the Seat (2) and Back Rest(1) go back and Fully Tighten All of the Bolts with the Allen Wrench(F).

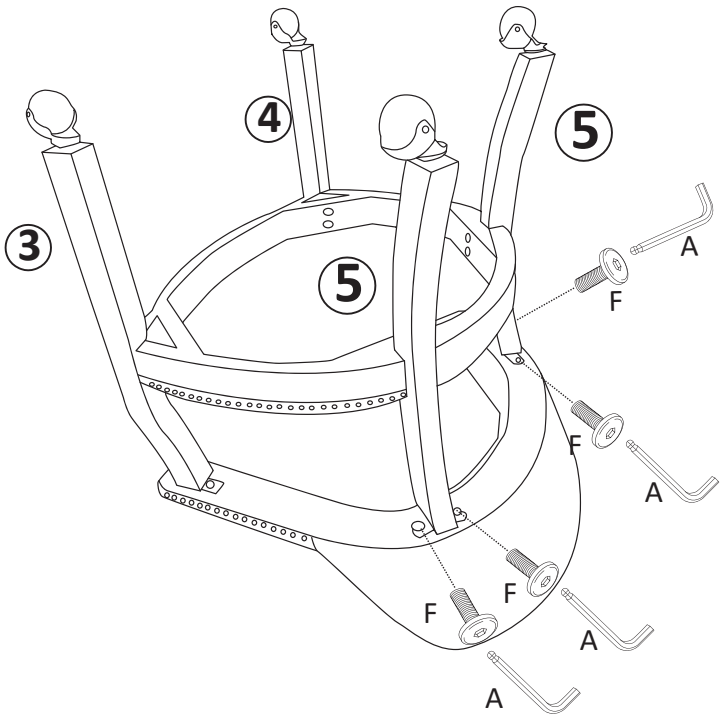

A x 1

F x 4

Step 5

1.Carefully flip over the Chair and Enjoy!

