


EN
























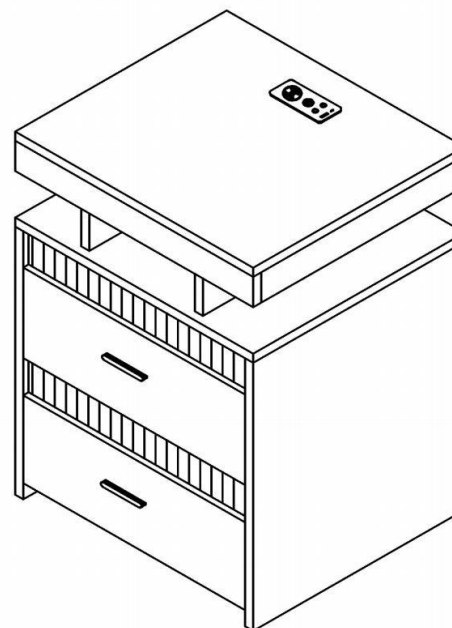



Before You Start


- ⚠ Please read all instructions carefully.
- ⚠ Retain instructions for future reference.
- ⚠ Separate and count all parts and hardware.
- ⚠ Read through each step carefully and follow the proper order.
- ⚠ We recommend that, where possible, all items are assembled near to the area in which they will be placed in use, to avoid moving the product unnecessarily once assembled.
- ⚠ Always place the product on a flat, steady and stable surface.
- ⚠ Keep all small parts and packaging materials for this product away from babies and children as they potentially pose a serious choking hazard.

Product Installation Instructions




			
Ax2	Bx4	Cx2	Dx2
			
Ex2	Fx1	Gx1	Hx1
			
Ix1	Jx1	J2x1	Kx1
			
Lx2	Mx2	Nx2	Ox1

1		46pcs +4pcs	2		46pcs +4pcs
Two in one screw(6x28mm)			Two in one nut(10x12mm)		
3		20pcs +4pcs	4		4pcs +1pcs
Wood chipping(6x30mm)			Handle & screw(4x16mm)		
5		8pcs +2pcs	6		20pcs +4pcs
screw(3x10mm)			Guide& screw(3x12mm)		
7		4pcs +2pcs	8		4pcs +1pcs
Foot rubber pad			Back plate buckle & Screw(3x16mm)		
		1pcs			
AC/DC Adapter (12V=3.0A)					



1pcs



Double-head screwdriver, use as required

2

1


2

3


4

Use parts ① and ②




Step1



Step2




Step3



Use a screwdriver to lock in the direction of the "+" sign

Disassemble along the direction of "-" sign


Step 1

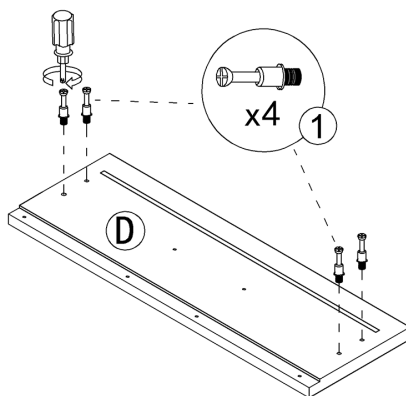

① x4


5

Step 2

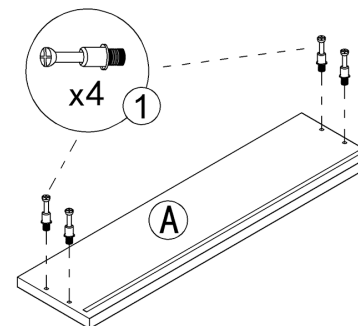

① x4

Step 3


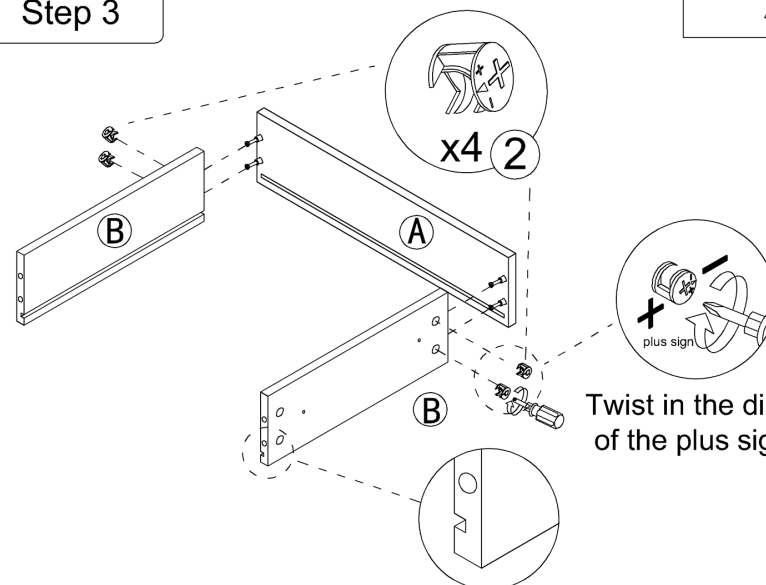


② x4


Twist in the direction of the plus sign

6

Step 4

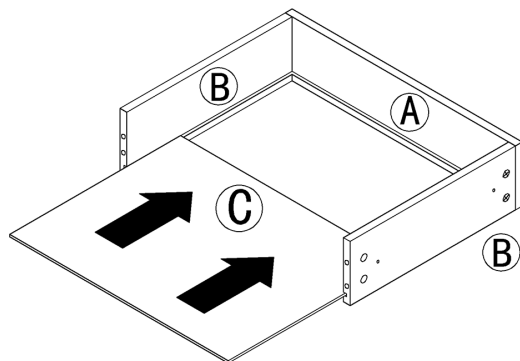


Step 5

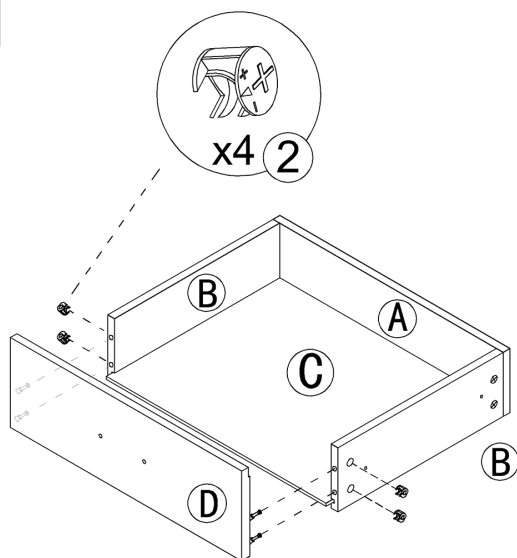



7

Step 6

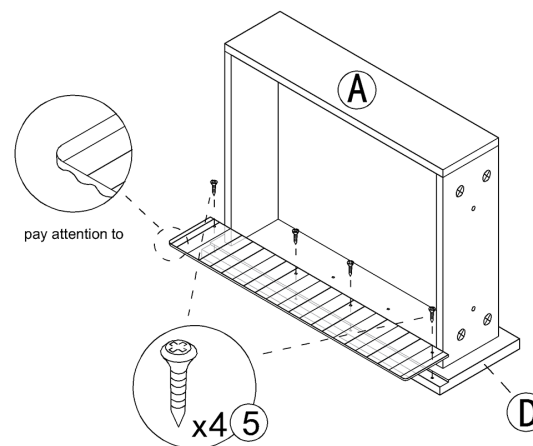


Don't beat the acrylic board too tightly, it will crack

Step 7

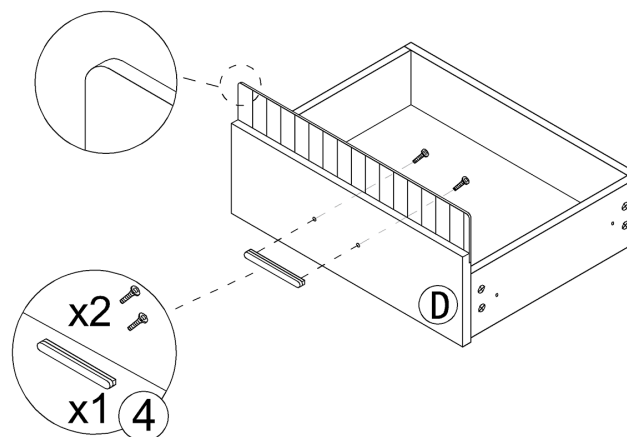



8

Exploded view of drawer guide rail




Step 1 : Pull the guide rail apart

Step 2 : Push the nylon buckle and pull outward ①

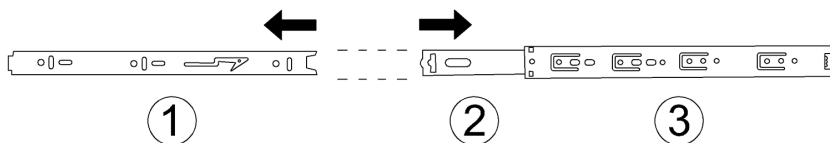
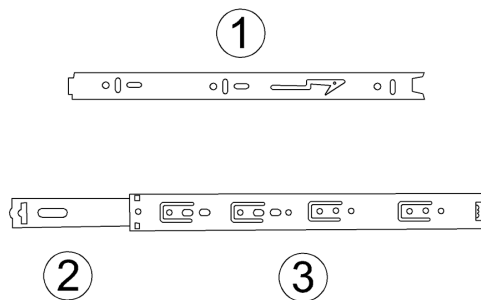


Step 8

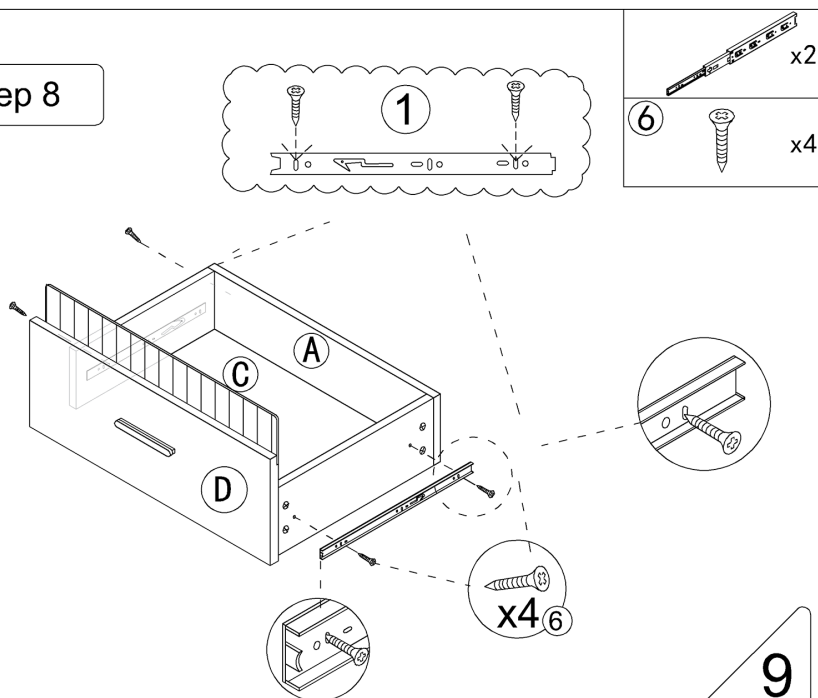



9

Step 9

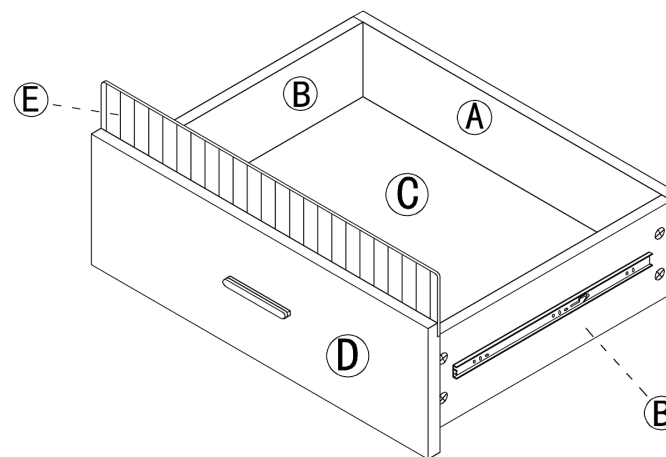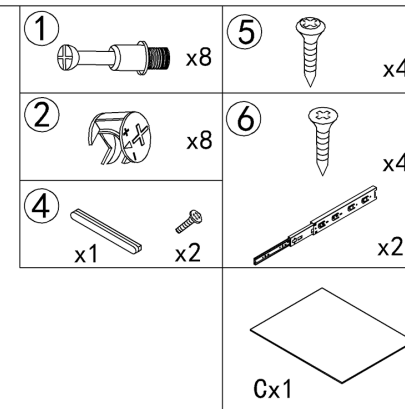


Use the same way to instalthe drawer

10

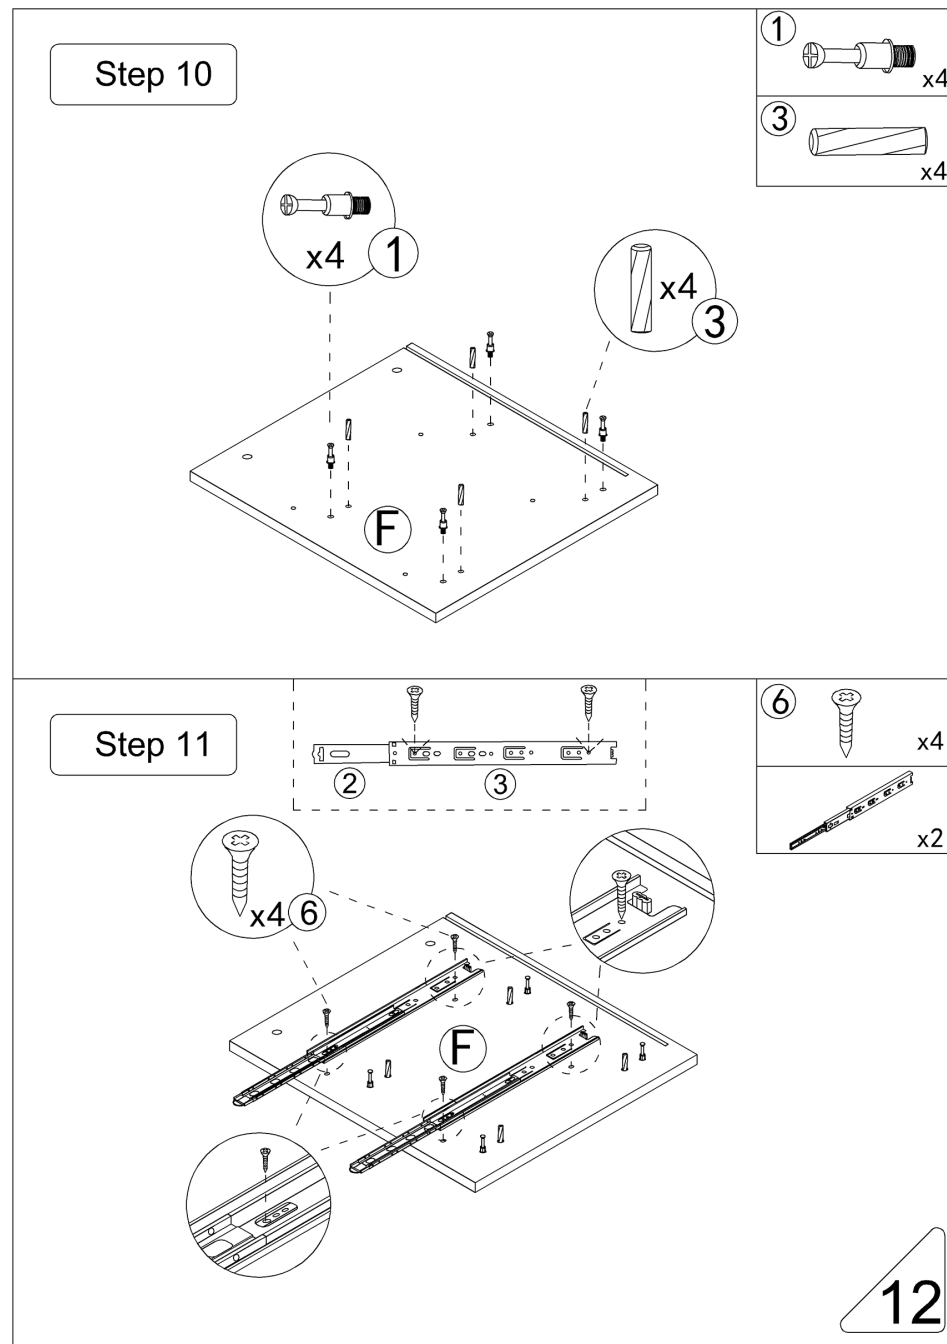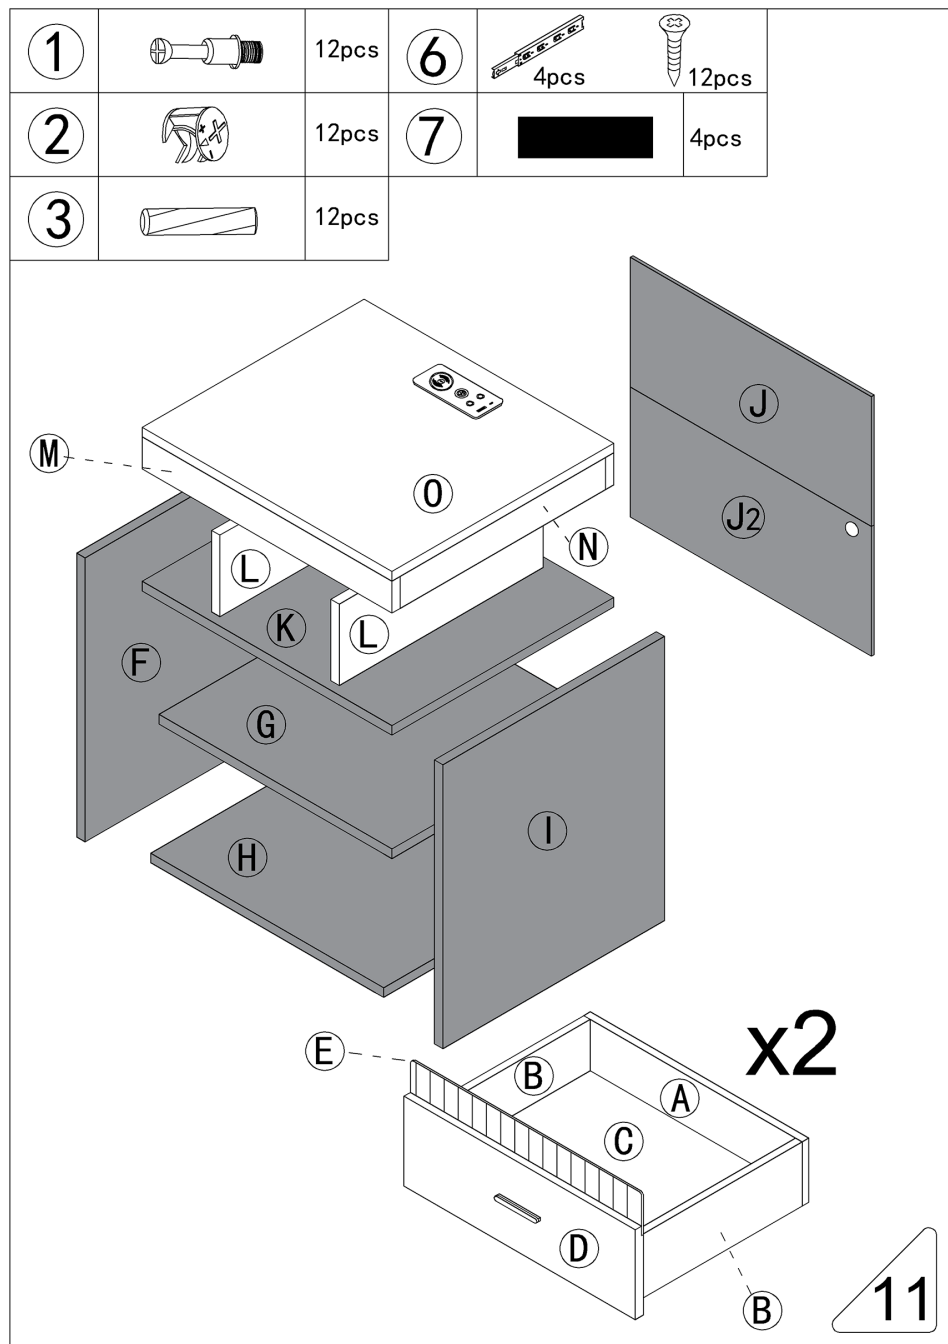


Step 12

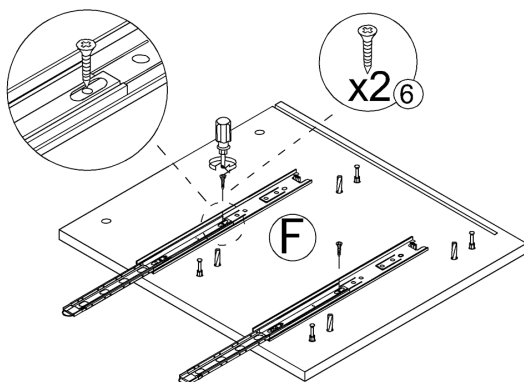


This hole is for strengthening fixed hole customers can choose to install according to their needs.

Step 13


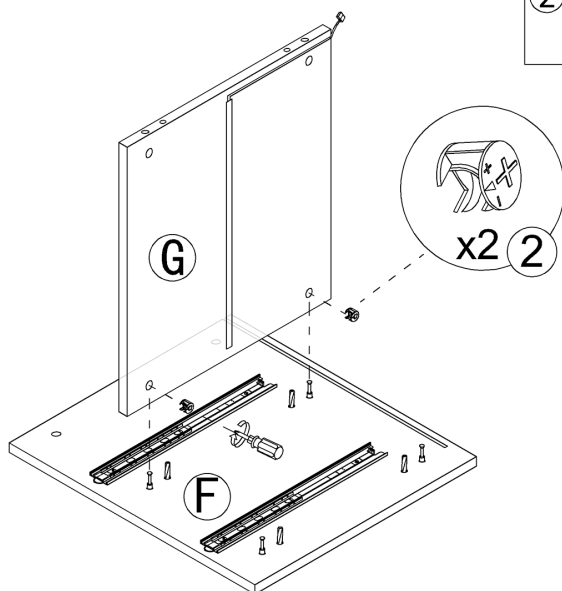


13

Step 14


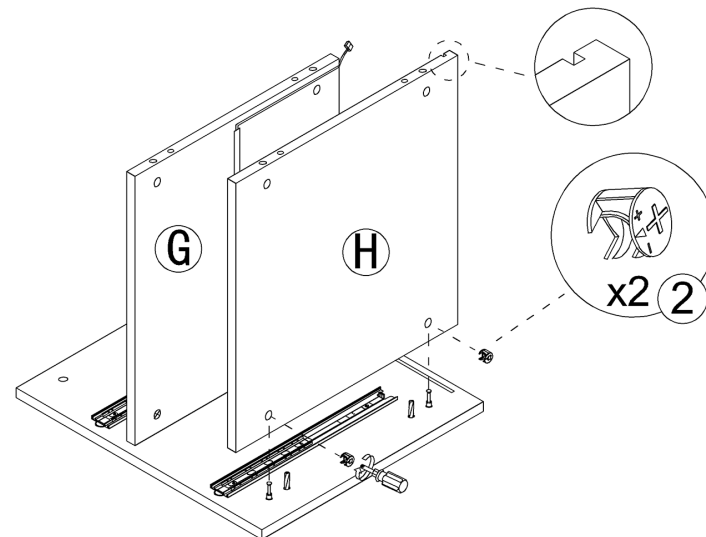


Step 15

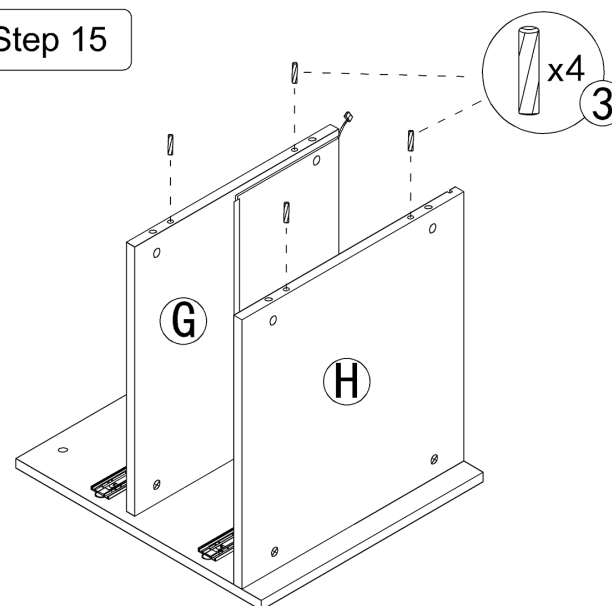



14

Step 16


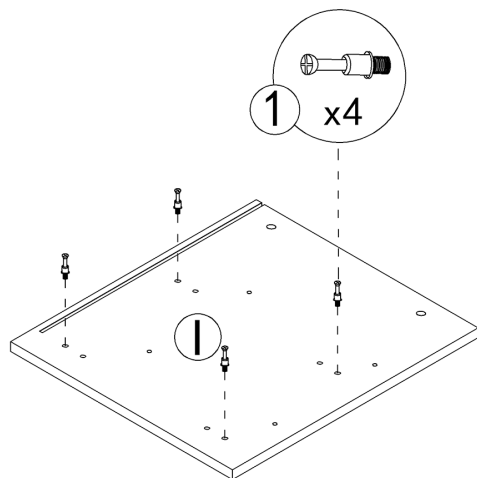



Step 18

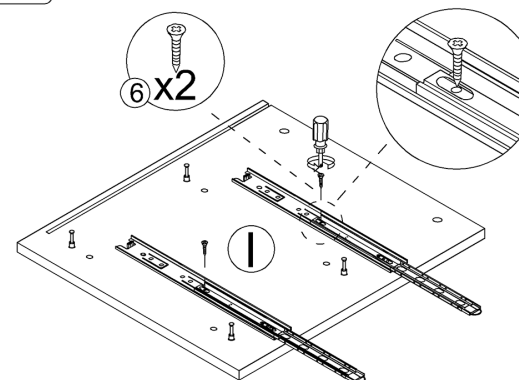


This hole is for strengthening fixed hole customers can choose to install according to their needs.

Step 17

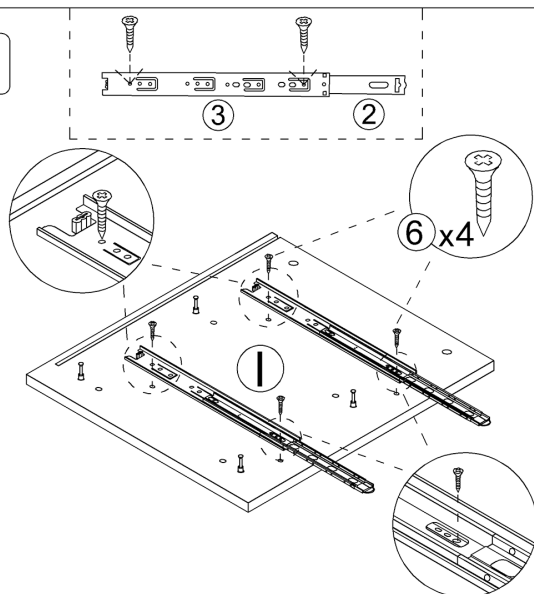

15


Step 19

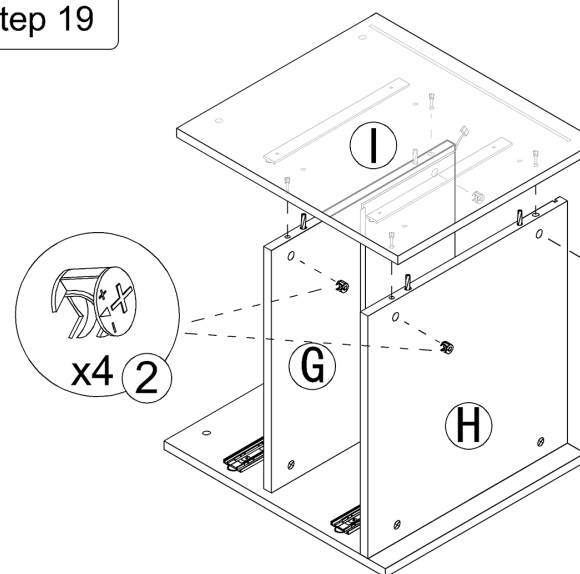

16


Step 20

7




x4

Tear off release paper and stick the black foot pad on the board

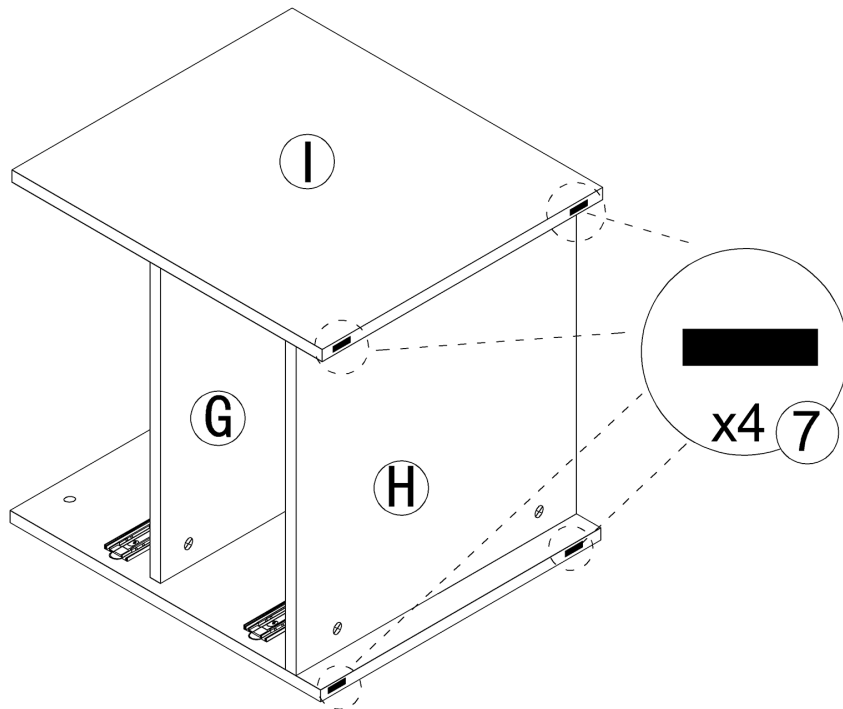


17

Step 21



J2x1



Jx1

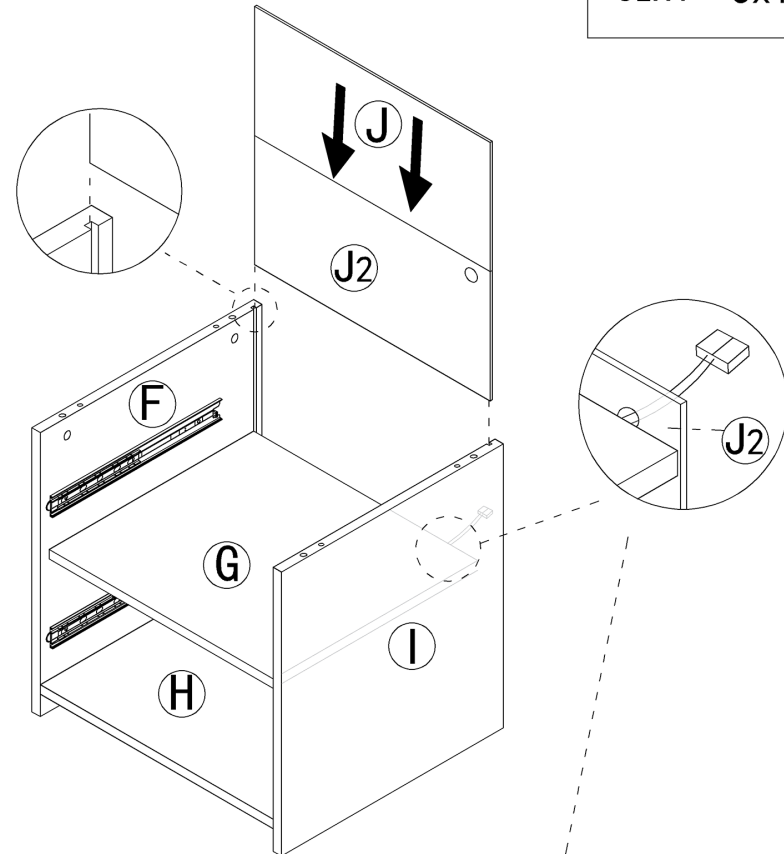



The light wire of the G board should be threaded out from the hole position of the back board

18

Step 22

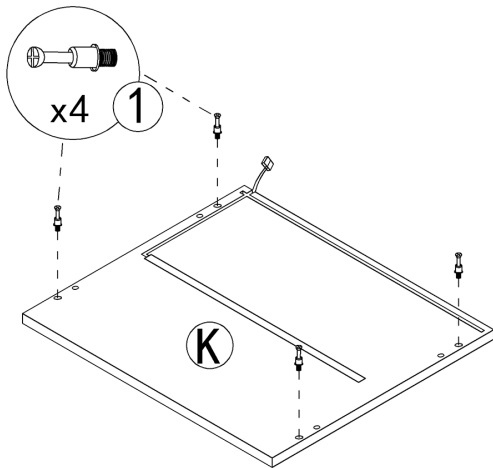


Step 23

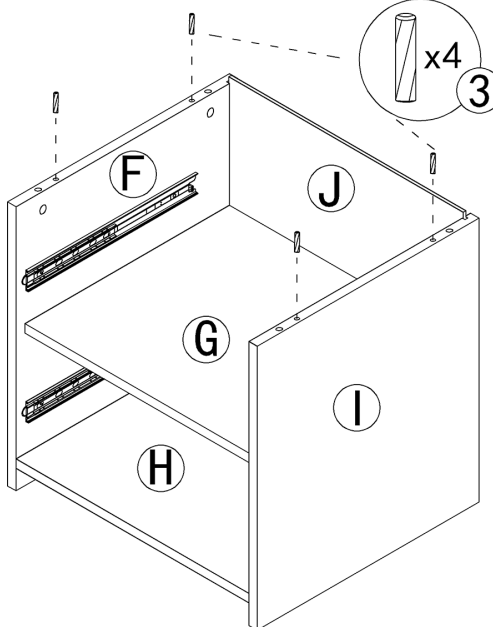



19




Step 24

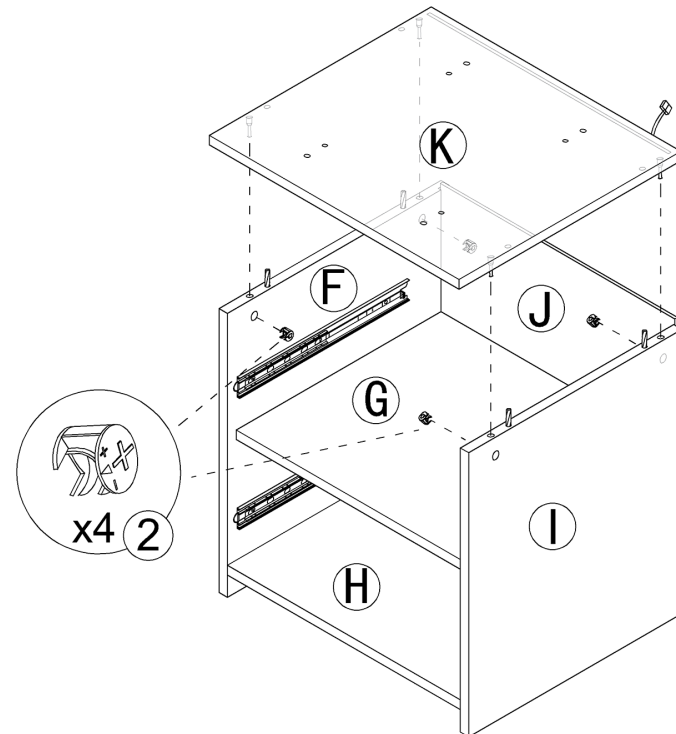


20

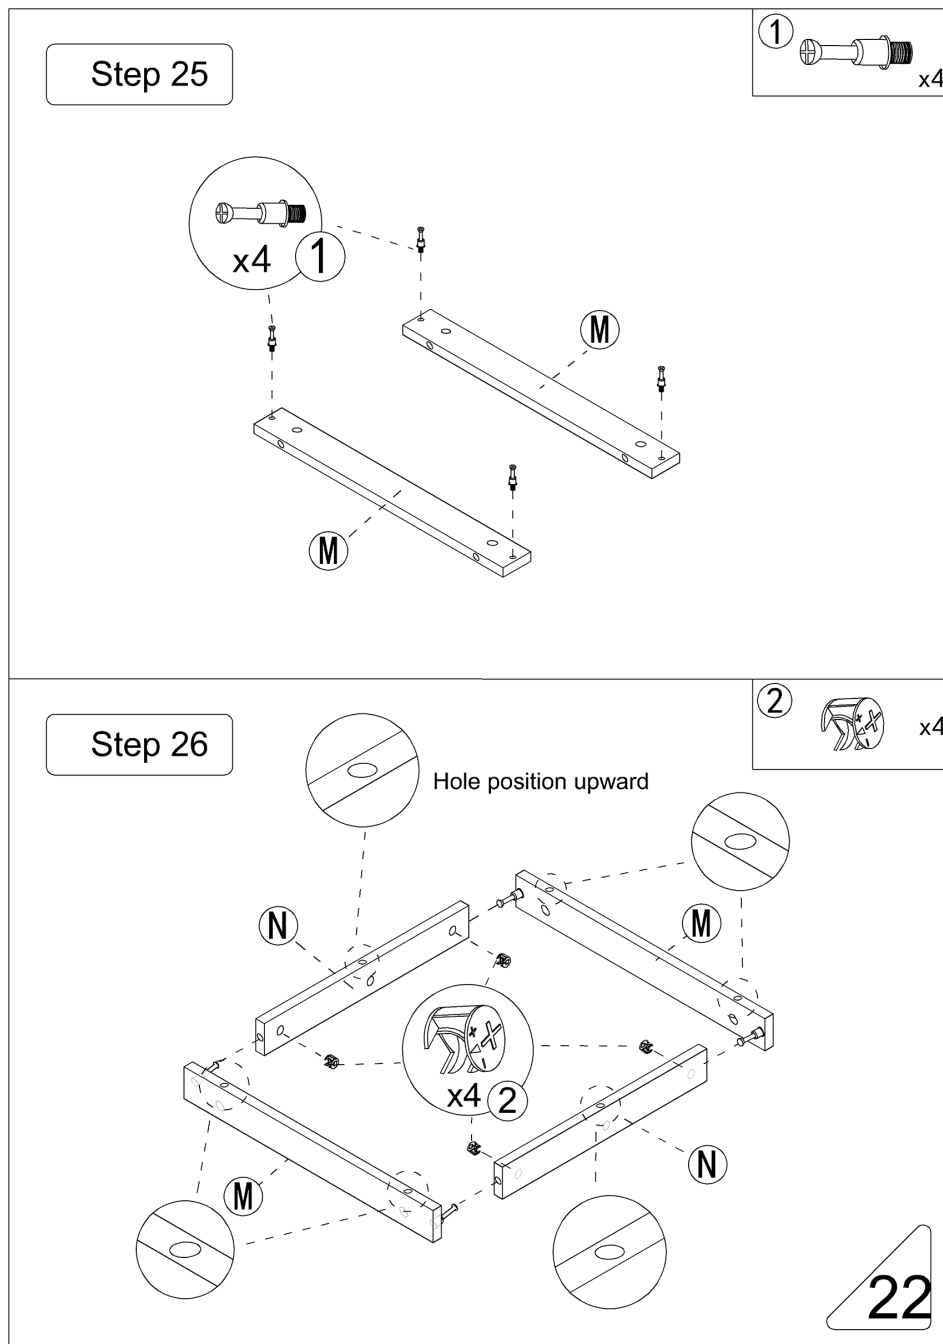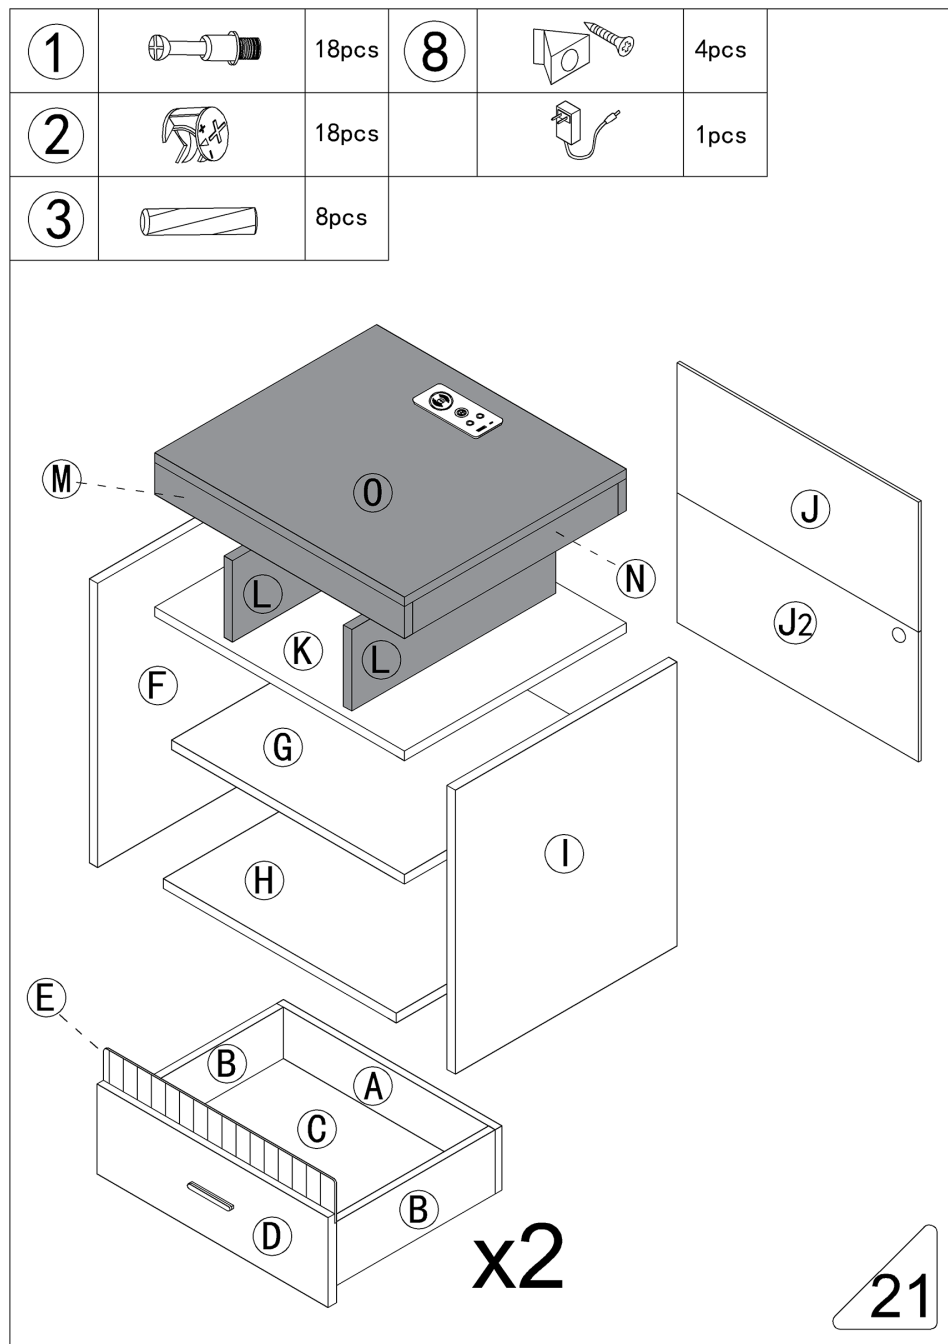


Step 27

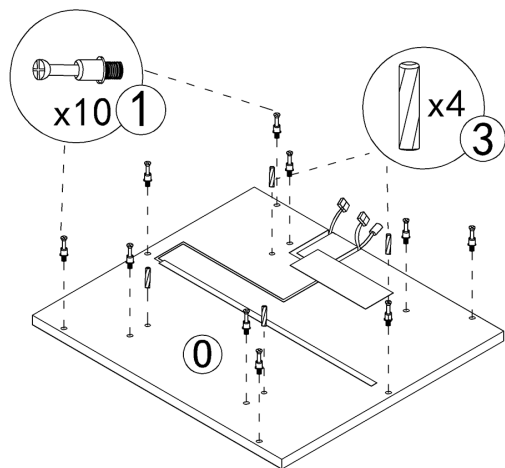




Step 29

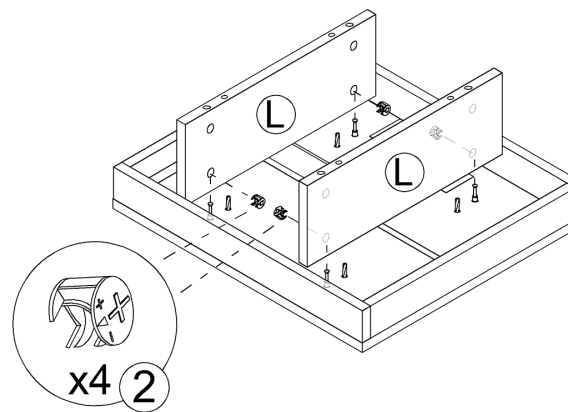

Step 28

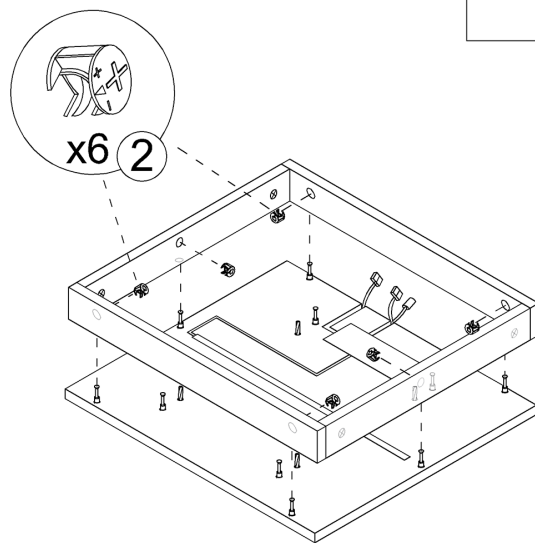

Step 30

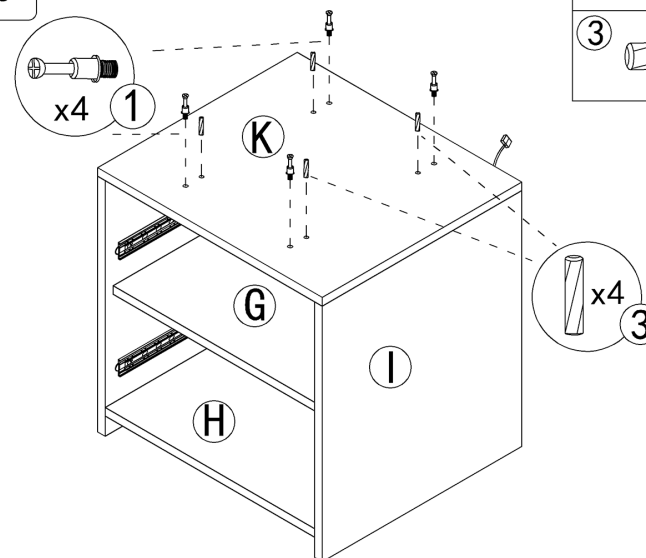


23

24


Step 31

②  x4

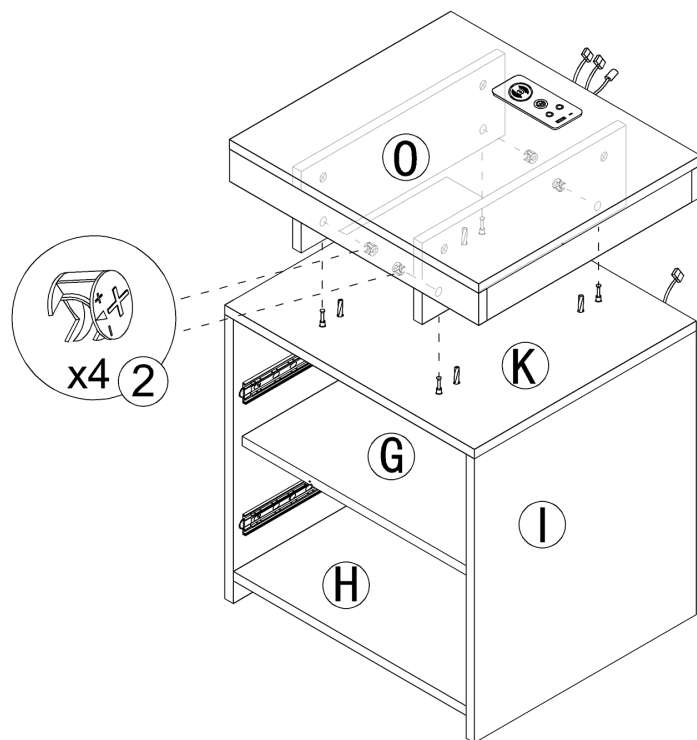

25

Step 32

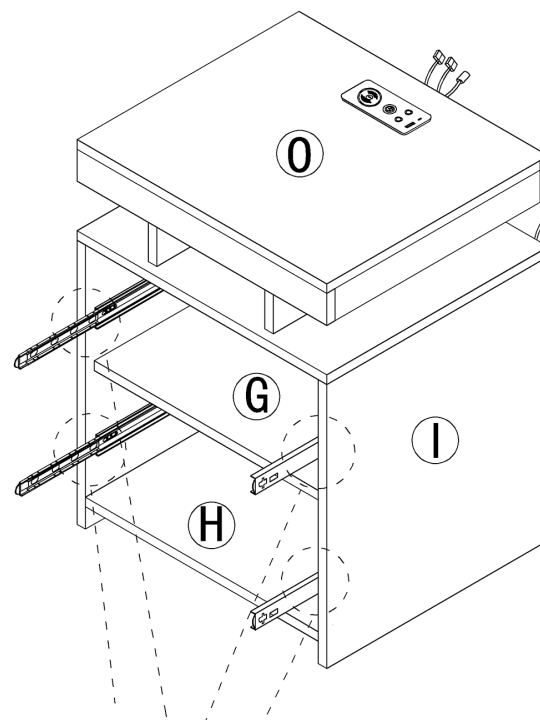

As shown, When installing the drawer, pull the guide rail out first, Slide beads are also pulled out.

26

Step 33

If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap

27

If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap

27

Step 34



If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap

28

If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap



28

Step 35

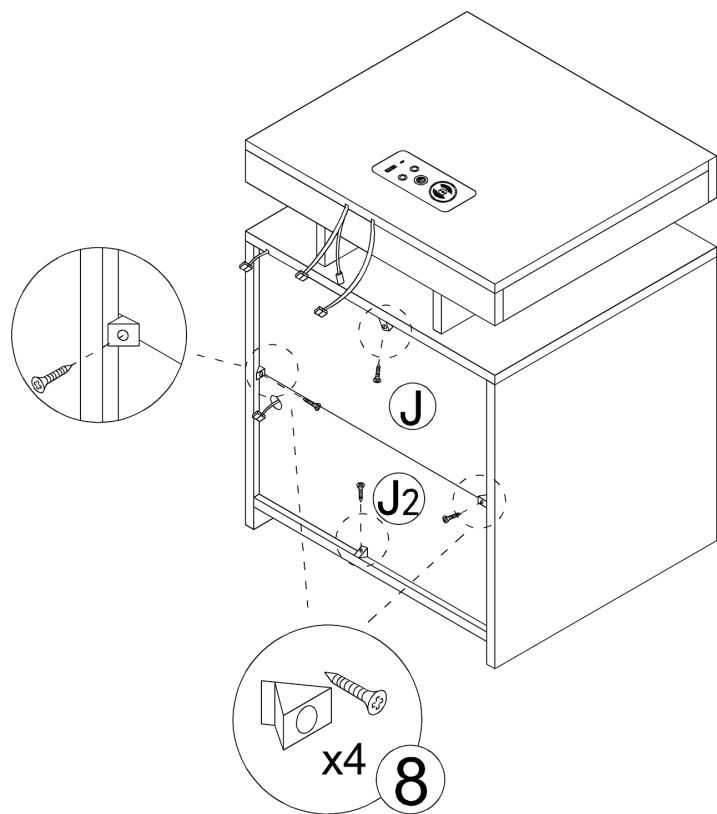


29

Step 36

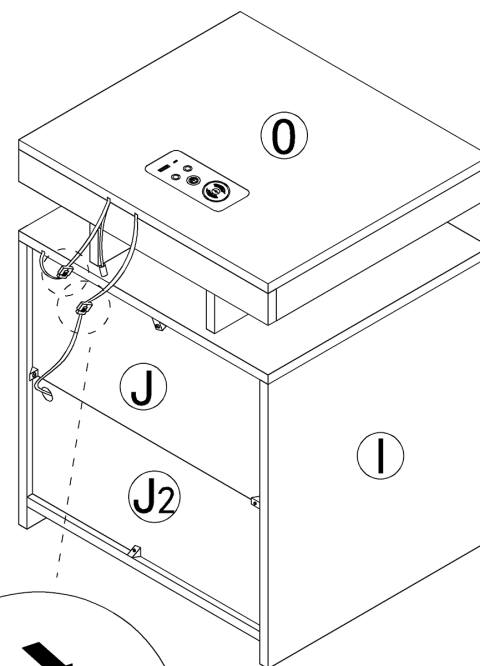

30

Step 37

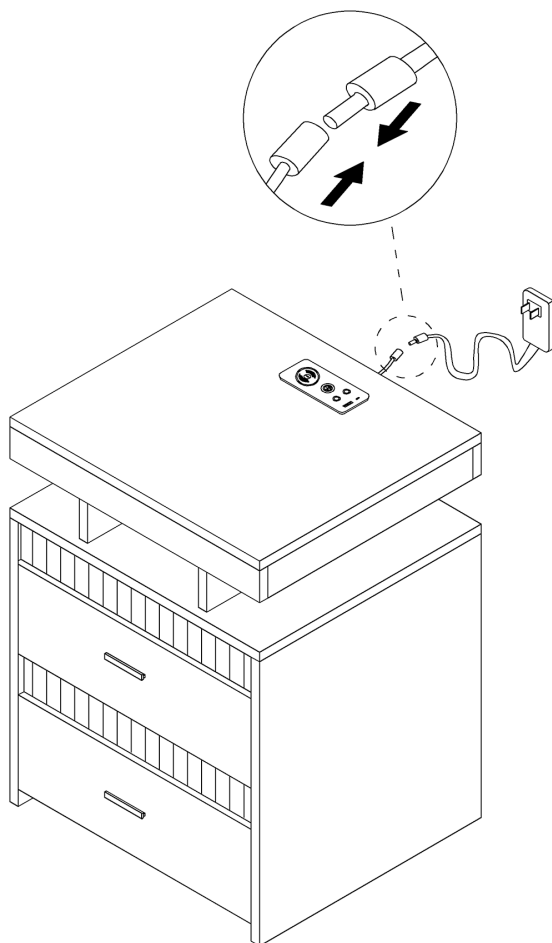

31



User's Guide

Thank you for purchasing this product.

To use this product, please plug it into a 12V DC power supply.

Please use it if the product works normally after connecting to power.

Introduction

The box is an intelligent controller which integrates the charging function and the lighting control function, coming with 1 USB port and 1 type-C port, 2 touch buttons, a 24-color lighting control button, and a wireless charger.

Operation



This touch button is used to turn on/off lights and adjust brightness.

A. Long touch -> adjust the luminance.




This touch button is used to turn on/off the induction function.


A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller within 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.



This touch button is used to change 24 colors light. You can rotate the ring to choose colors, or click the ring to choose colors. Click in the middle of the ring, and reset to the white light.

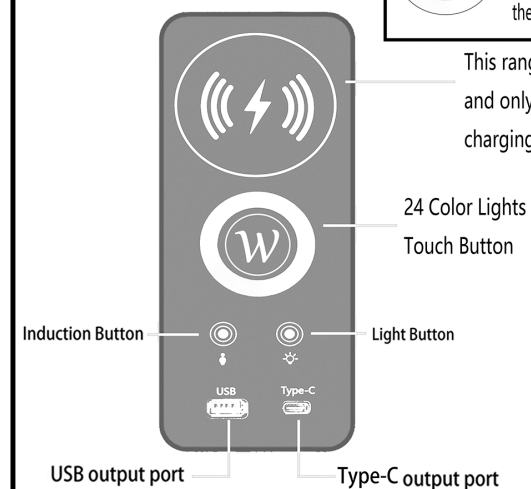

This range is a wireless charging area, and only mobile phones with wireless charging function can be charged.

24 Color Lights
Touch Button

Induction Button

Light Button

USB output port

Type-C output port



ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.
3. If you have any questions when installing, please feel free to contact us. Thank you.