



Shower Door Installation Instructions

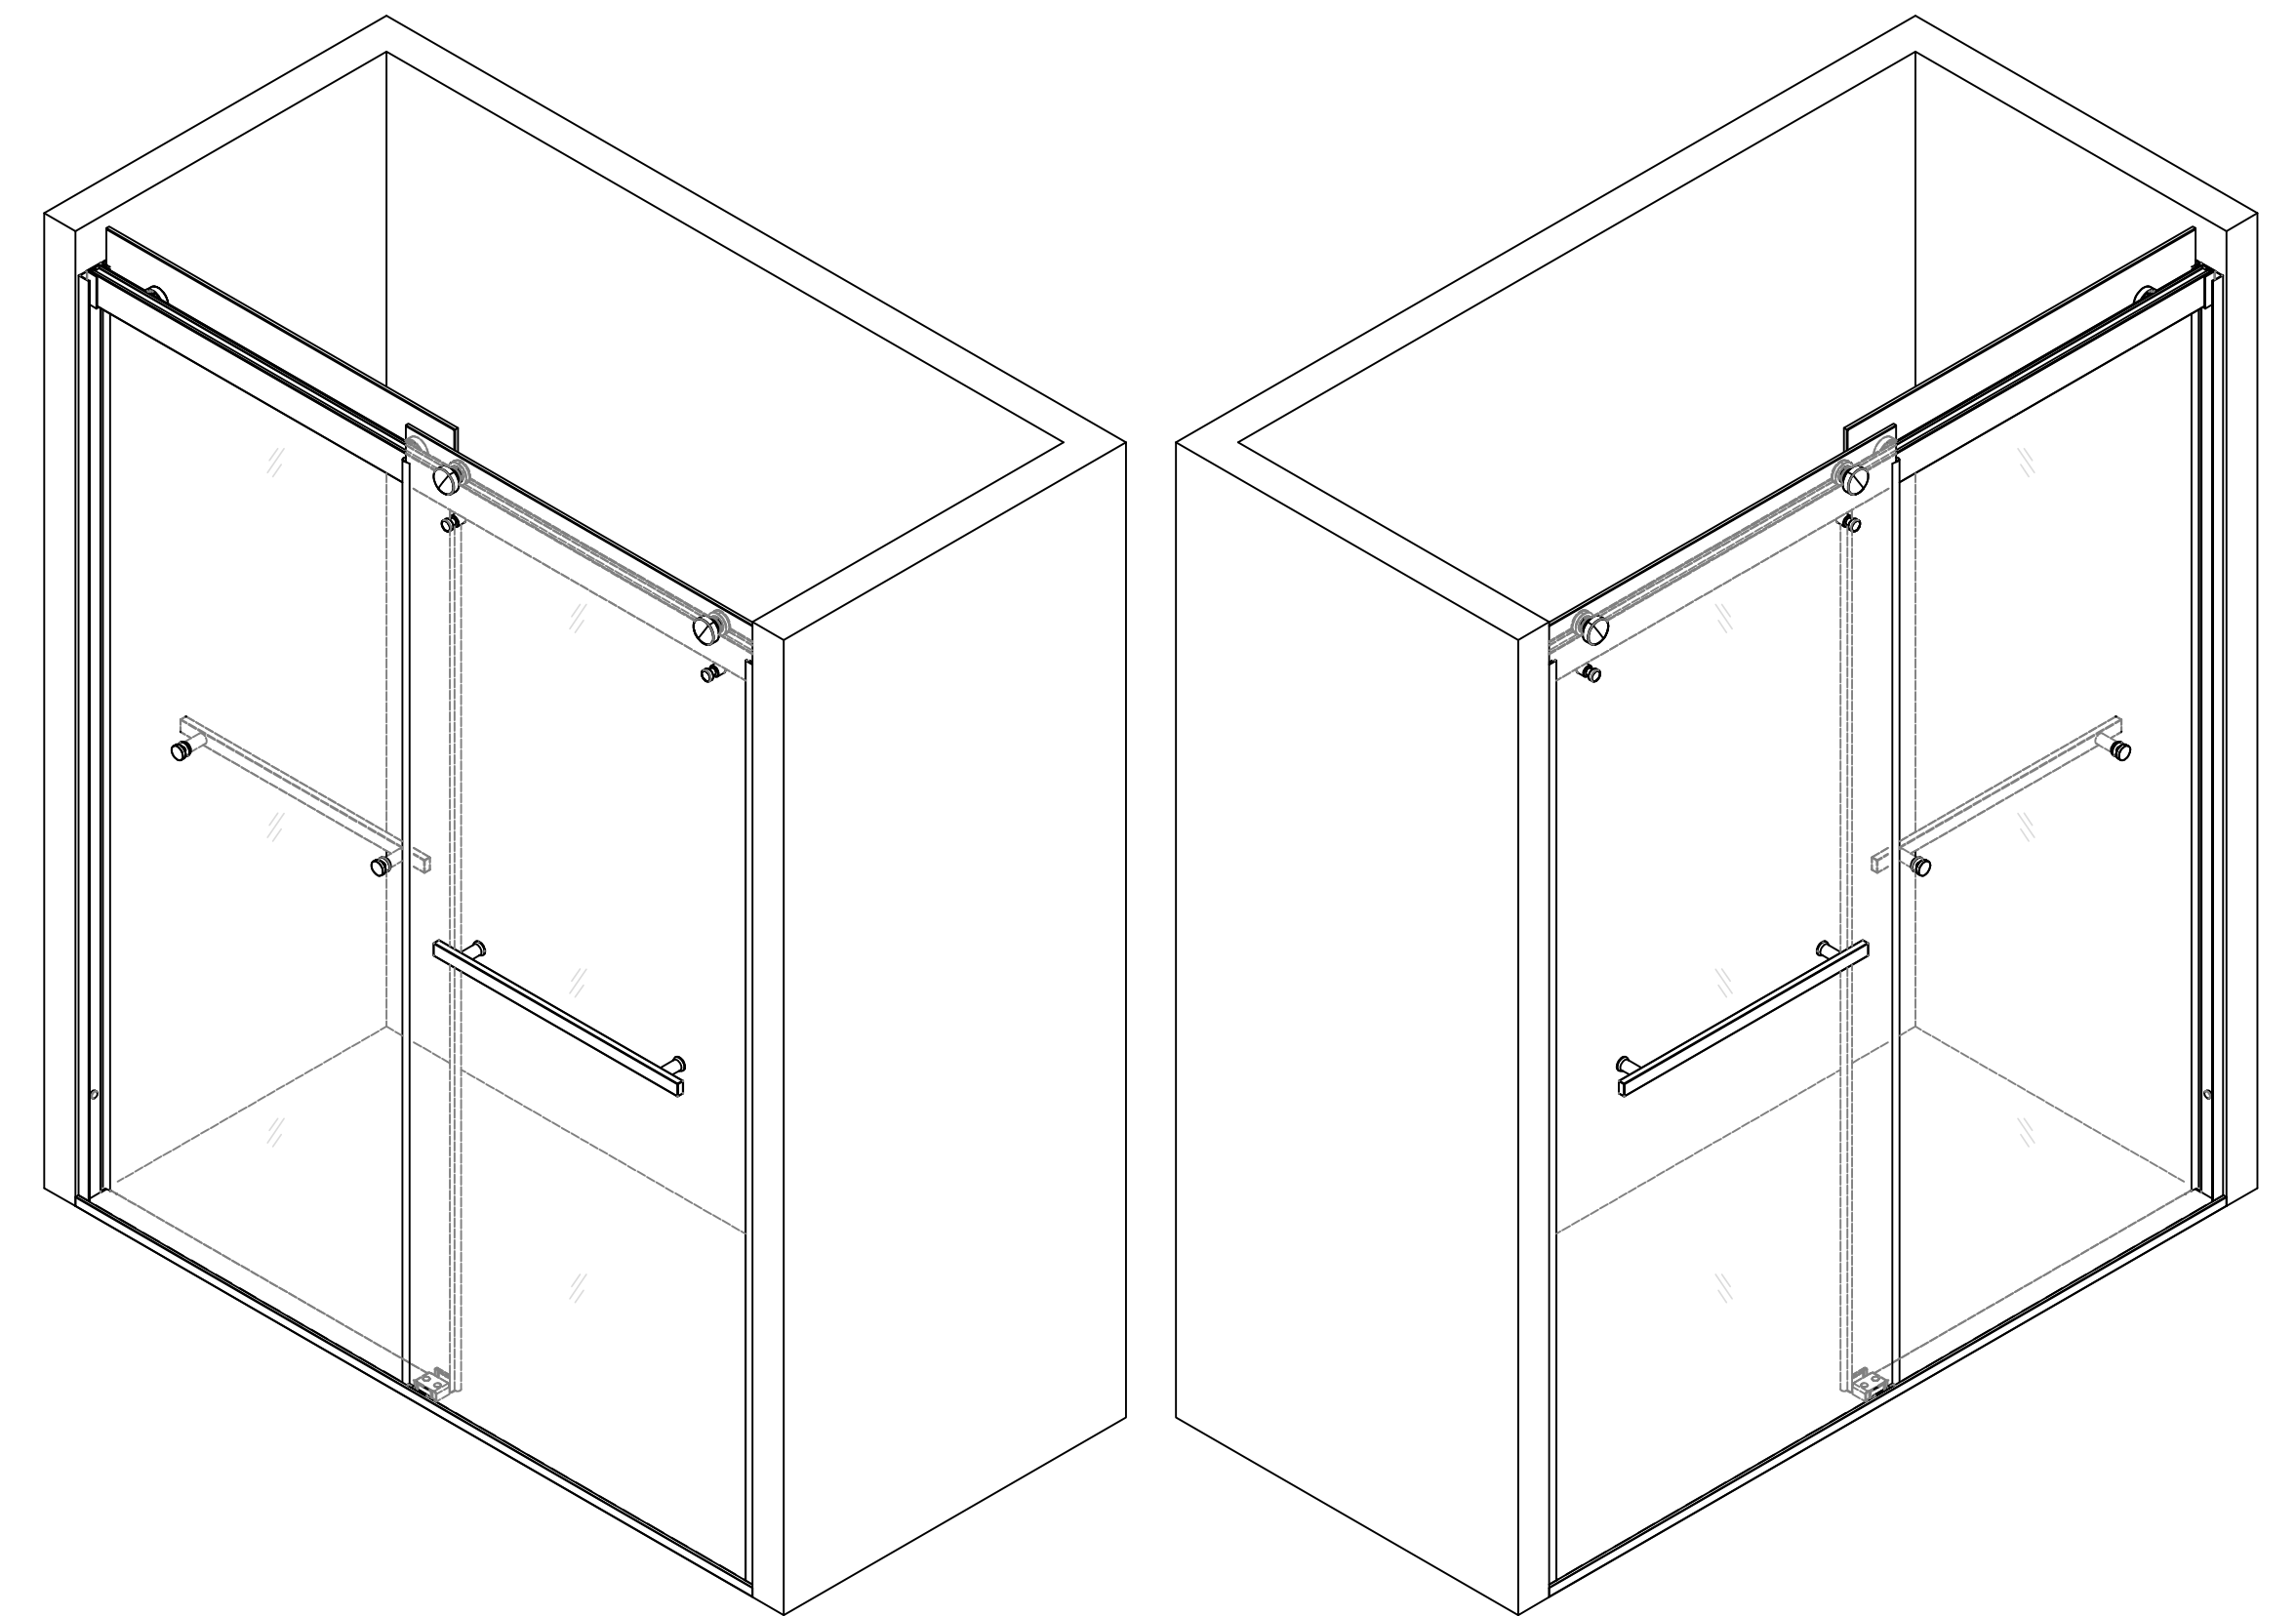

 **Reversible For a Left or Right Door**


PACKAGE CONTENT

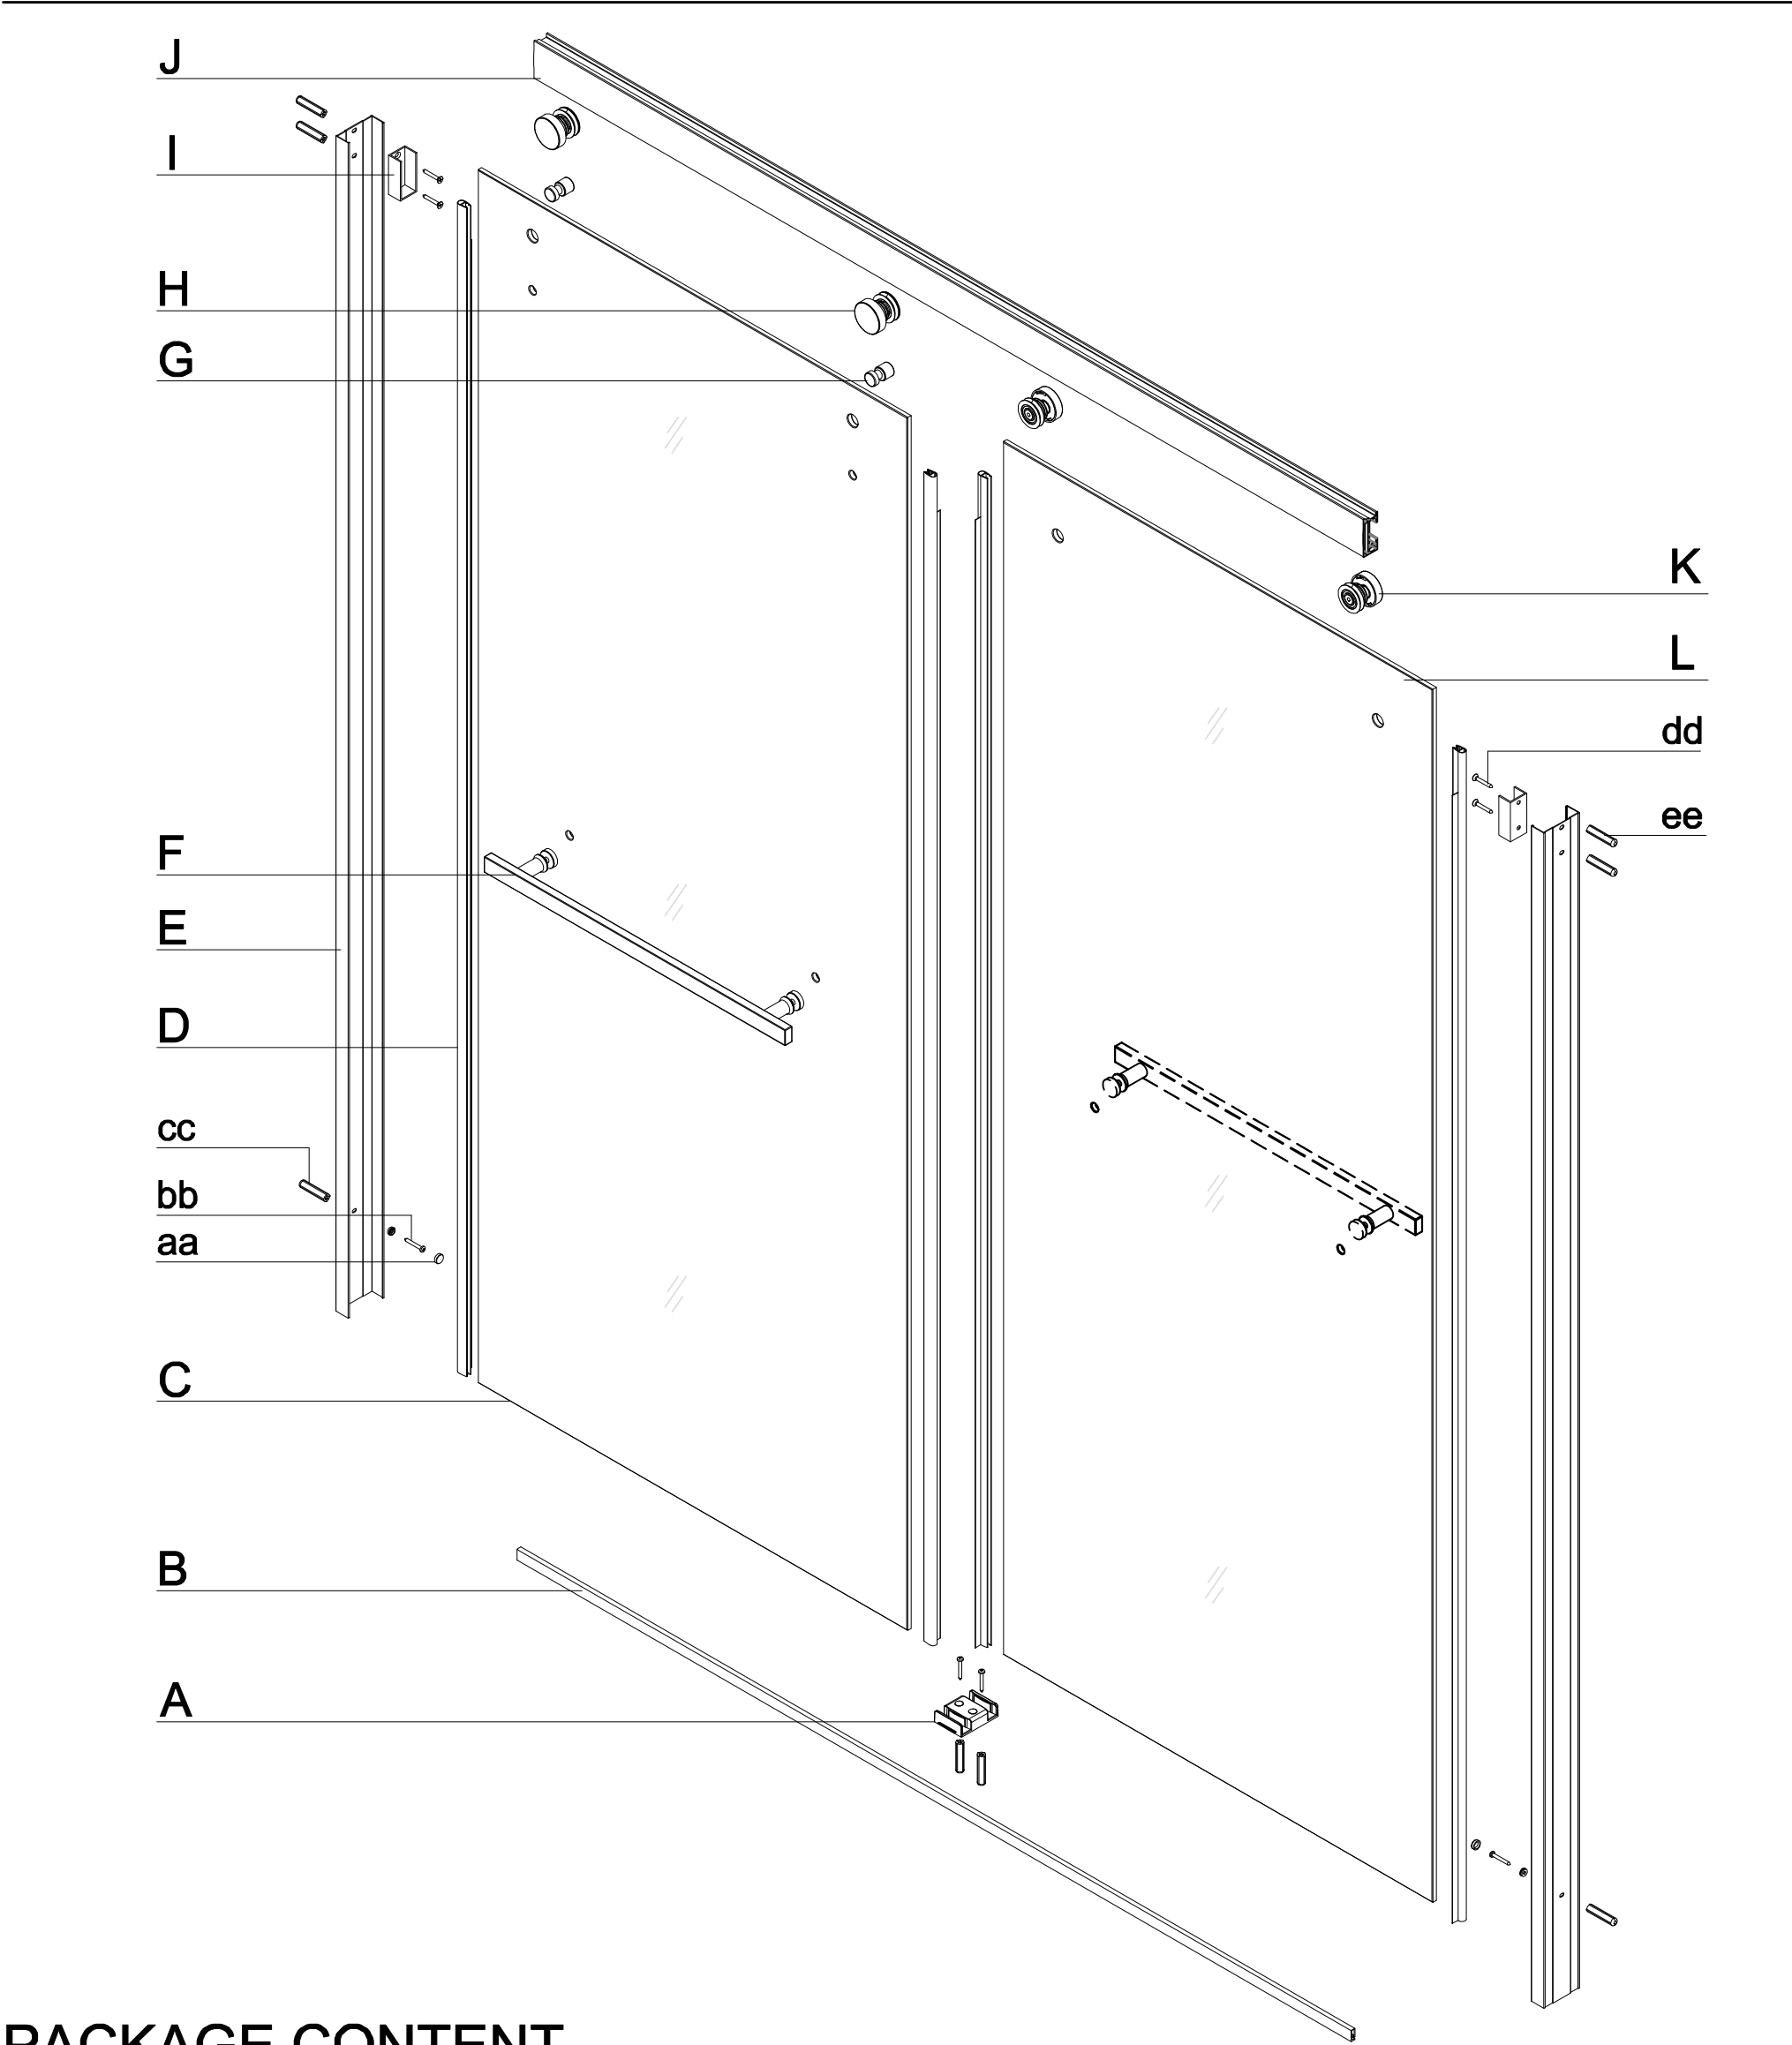


PACKAGE CONTENT

PART#	DESCRIPTION	QTY	PART#	DESCRIPTION	QTY
A	Bottom guild	1	G	Anti-Jump Assembly	2
B	Water seal	1	H	Roller(outside)	2
C	Door panel (outside)	1	I	Wall Bracket Assembly	2
D	F shape seal	4	J	Top Track Assembly	1
E	Wall Jamb	2	K	Roller(inside)	2
F	Handle	2	L	Door panel (inside)	1


PACKAGE CONTENT

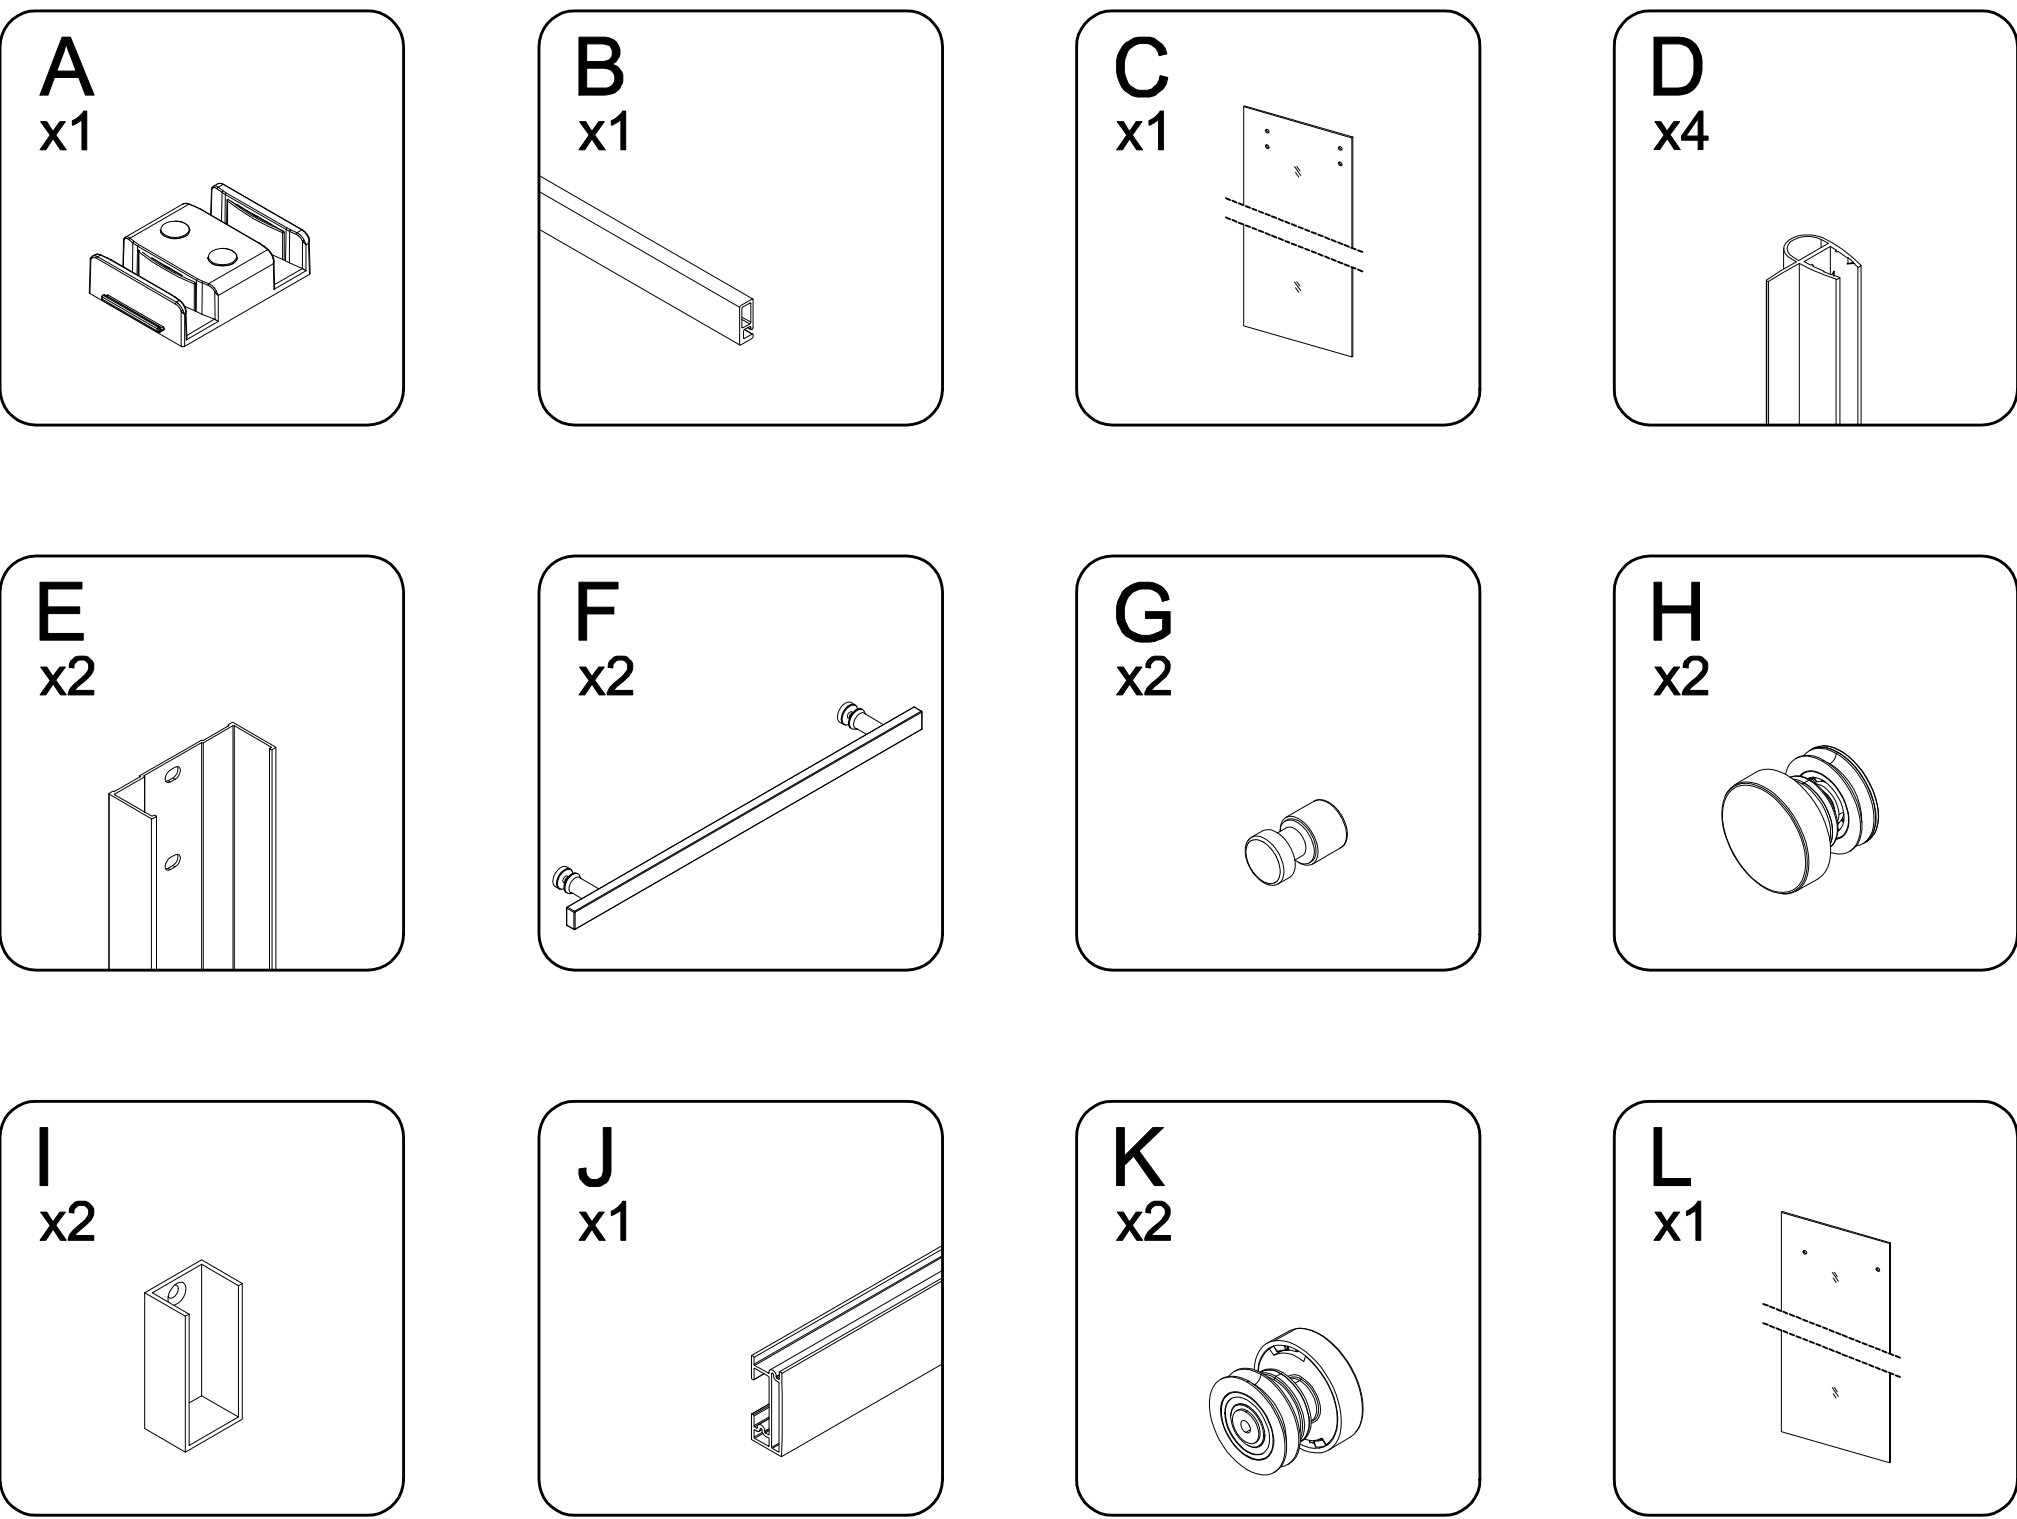

HARDWARE CONTENT

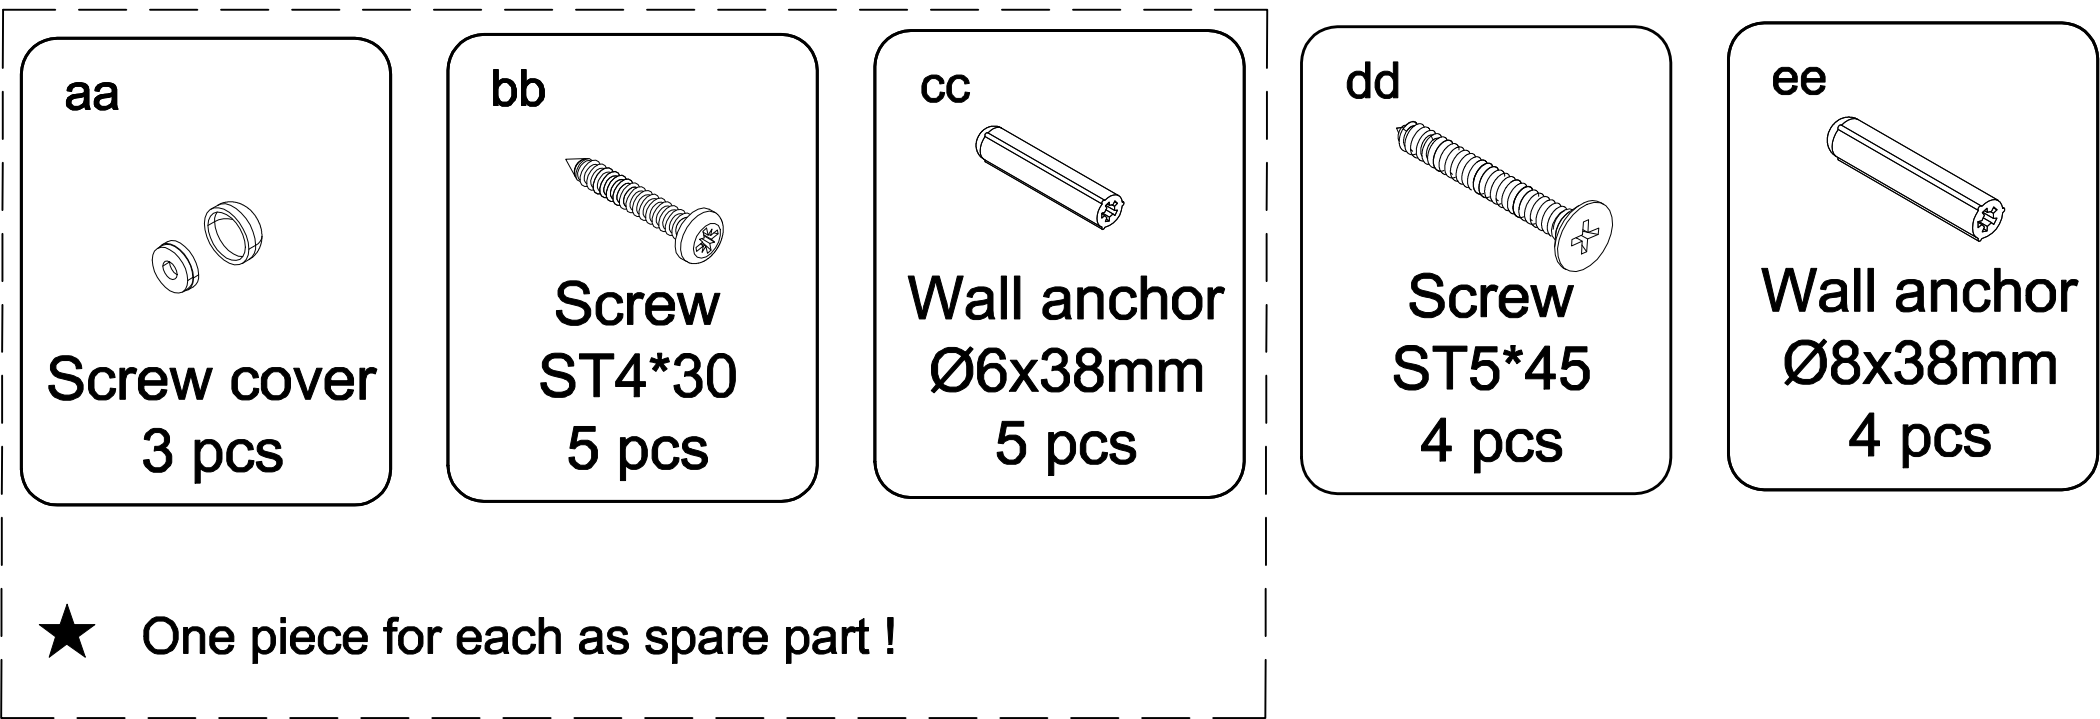

TOOLS REQUIRED

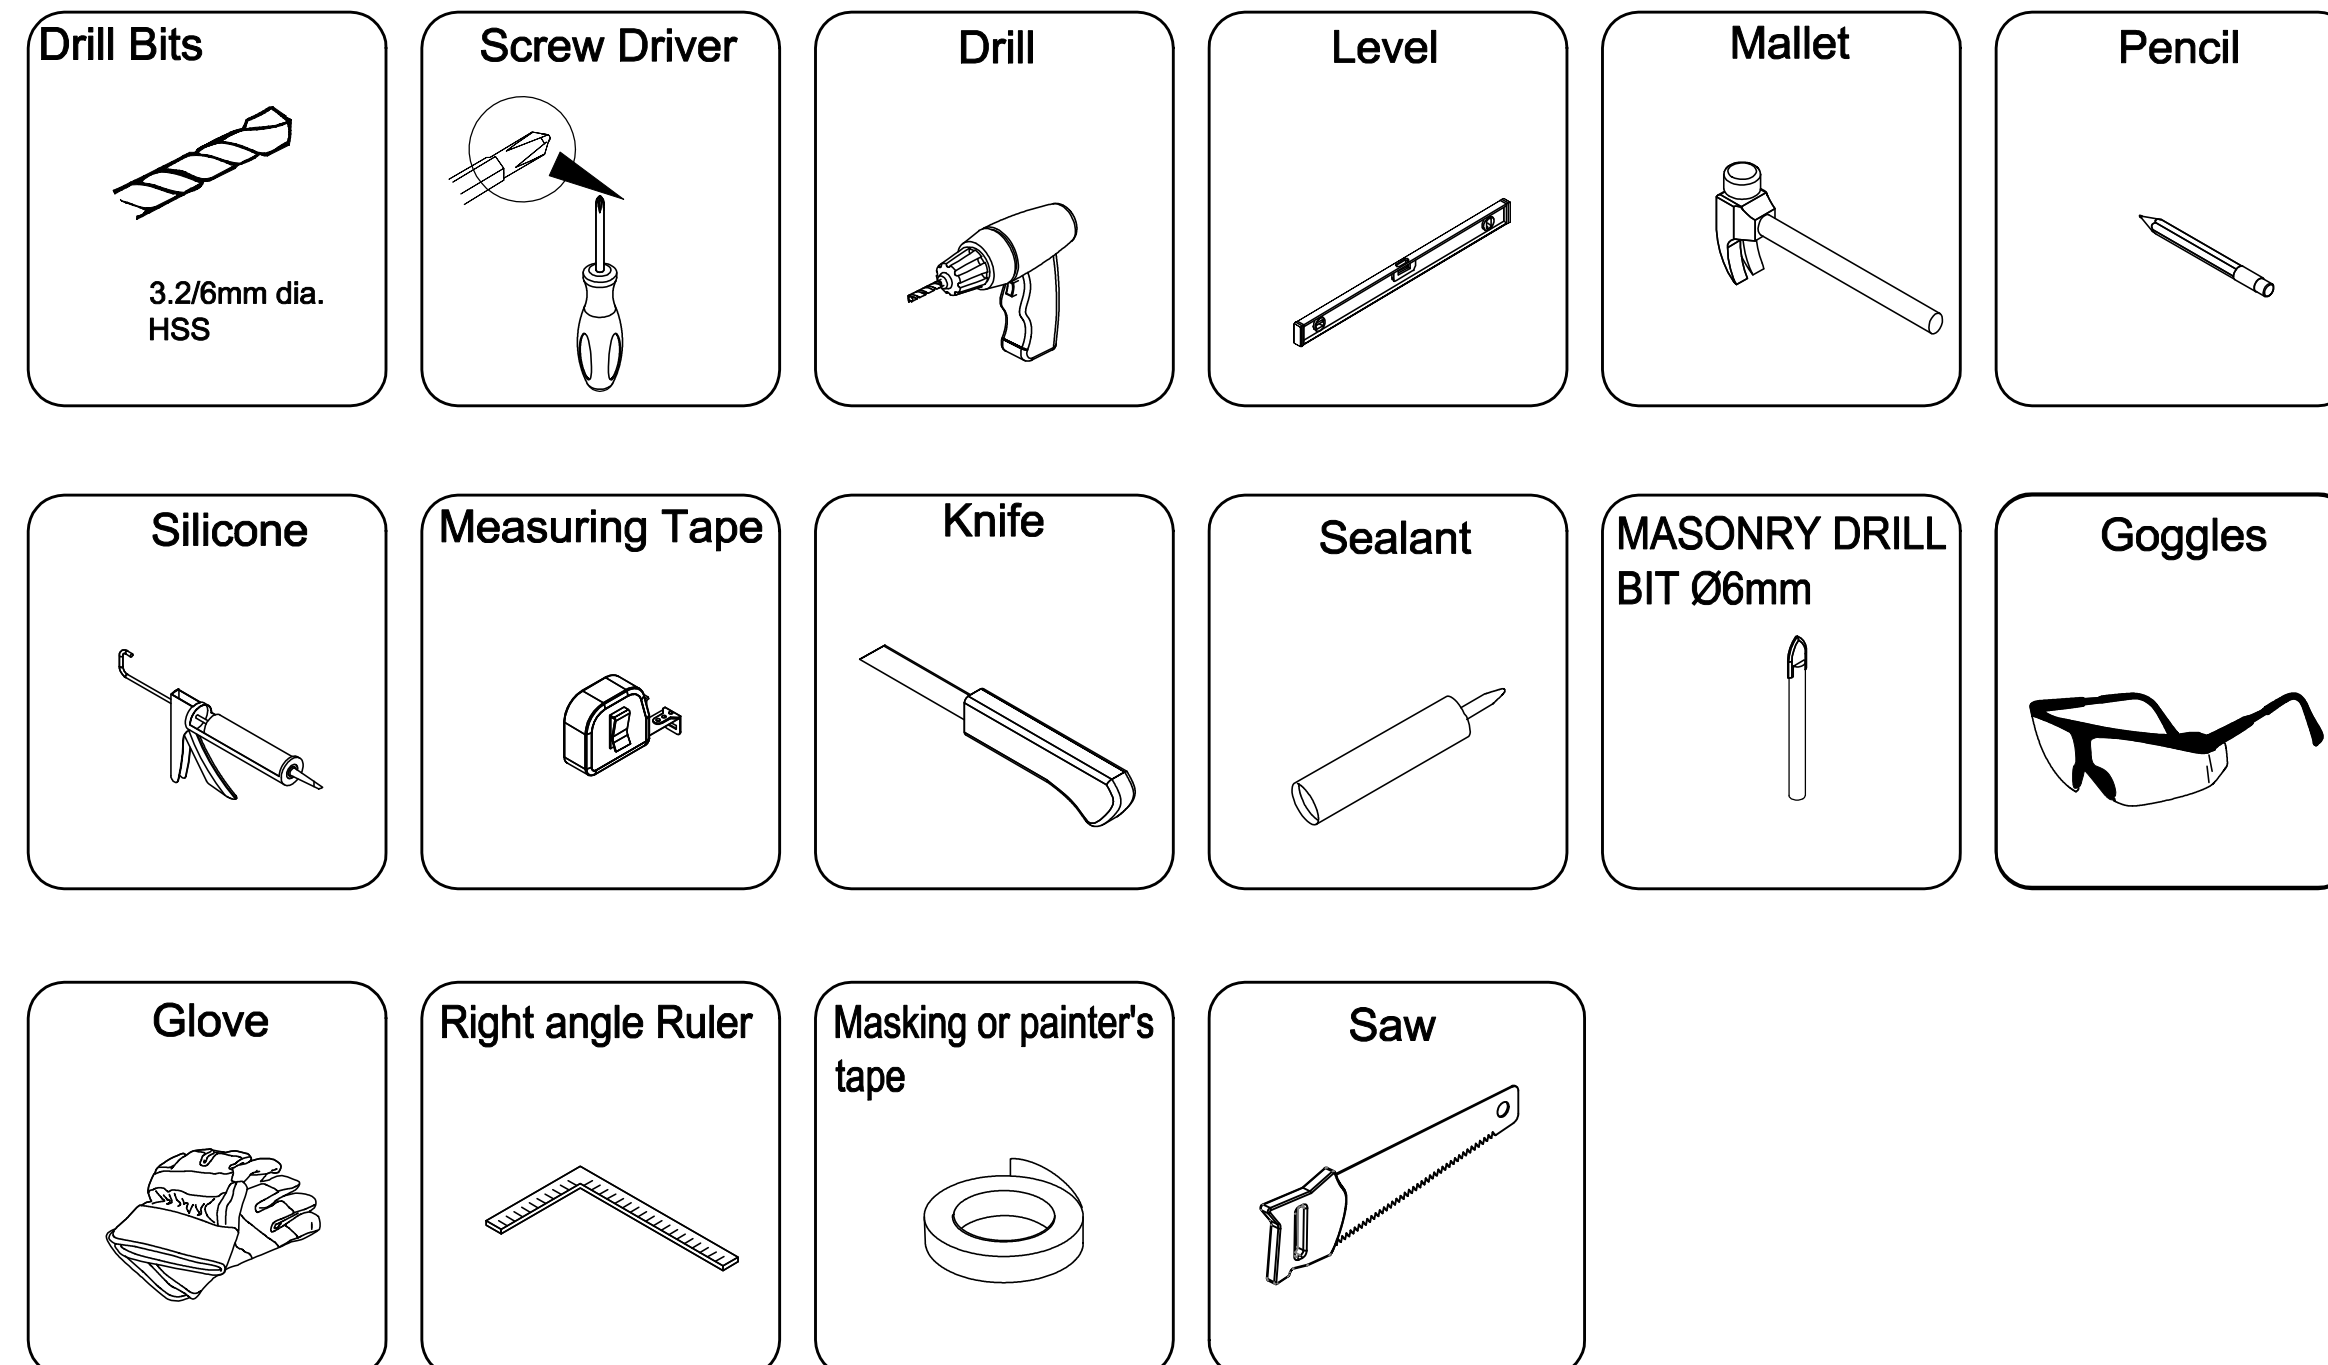

SAFETY INFORMATION

CAUTION

Please carefully read the following important safety information before handling or installing this shower. There is a risk of serious injury while handling this product. To minimize these risks, please note:

- Always wear safety glasses and gloves while handling.
- Always read and follow all the steps in the installation instructions.
- Inspect all contents and glass for damage before installation.
- Extreme caution should be taken while handling the glass during installation as the tempered glass may shatter if in contact with a hard surface.
- Handle the tempered glass with caution! Improperly handling the glass can cause it to break suddenly in small pieces (never in pointed fragments).
- Always take all precautions not to touch the tempered glass with any tools during the installation, or after installed.
- Do not cut or modify the tempered glass as it will shatter if cut.
- Carefully remove product from packaging and keep packaging until installation is complete.
- Inspect all parts for damage; if there is damage to the unit prior to installation, please contact customer service at the number provided in this guide.
- Install the shower on a floor that is level and able to accommodate the weight of the unit and an occupant.
- Consult local building codes and compliance standards prior to installation and ensure conformity.
- After installation, and from time to time, check the glass for fit and finish to ensure that nothing has come loose since installation.
- Keep this installation manual for future reference.

NOTE: Heavy product ! You will need at least two people to install this unit properly.

1


Check both of the finished walls for plumb and the threshold for level.

NOTE: 1、 This model does not allow for out-of-plumb adjustment.

2、 This model requires a minimum 3-5/32" of flat threshold space for installation.


Measure "W1" and cut the alu threshold same length as "W1 - 13/32".

Measure "W" and cut the alu threshold same length as "W".

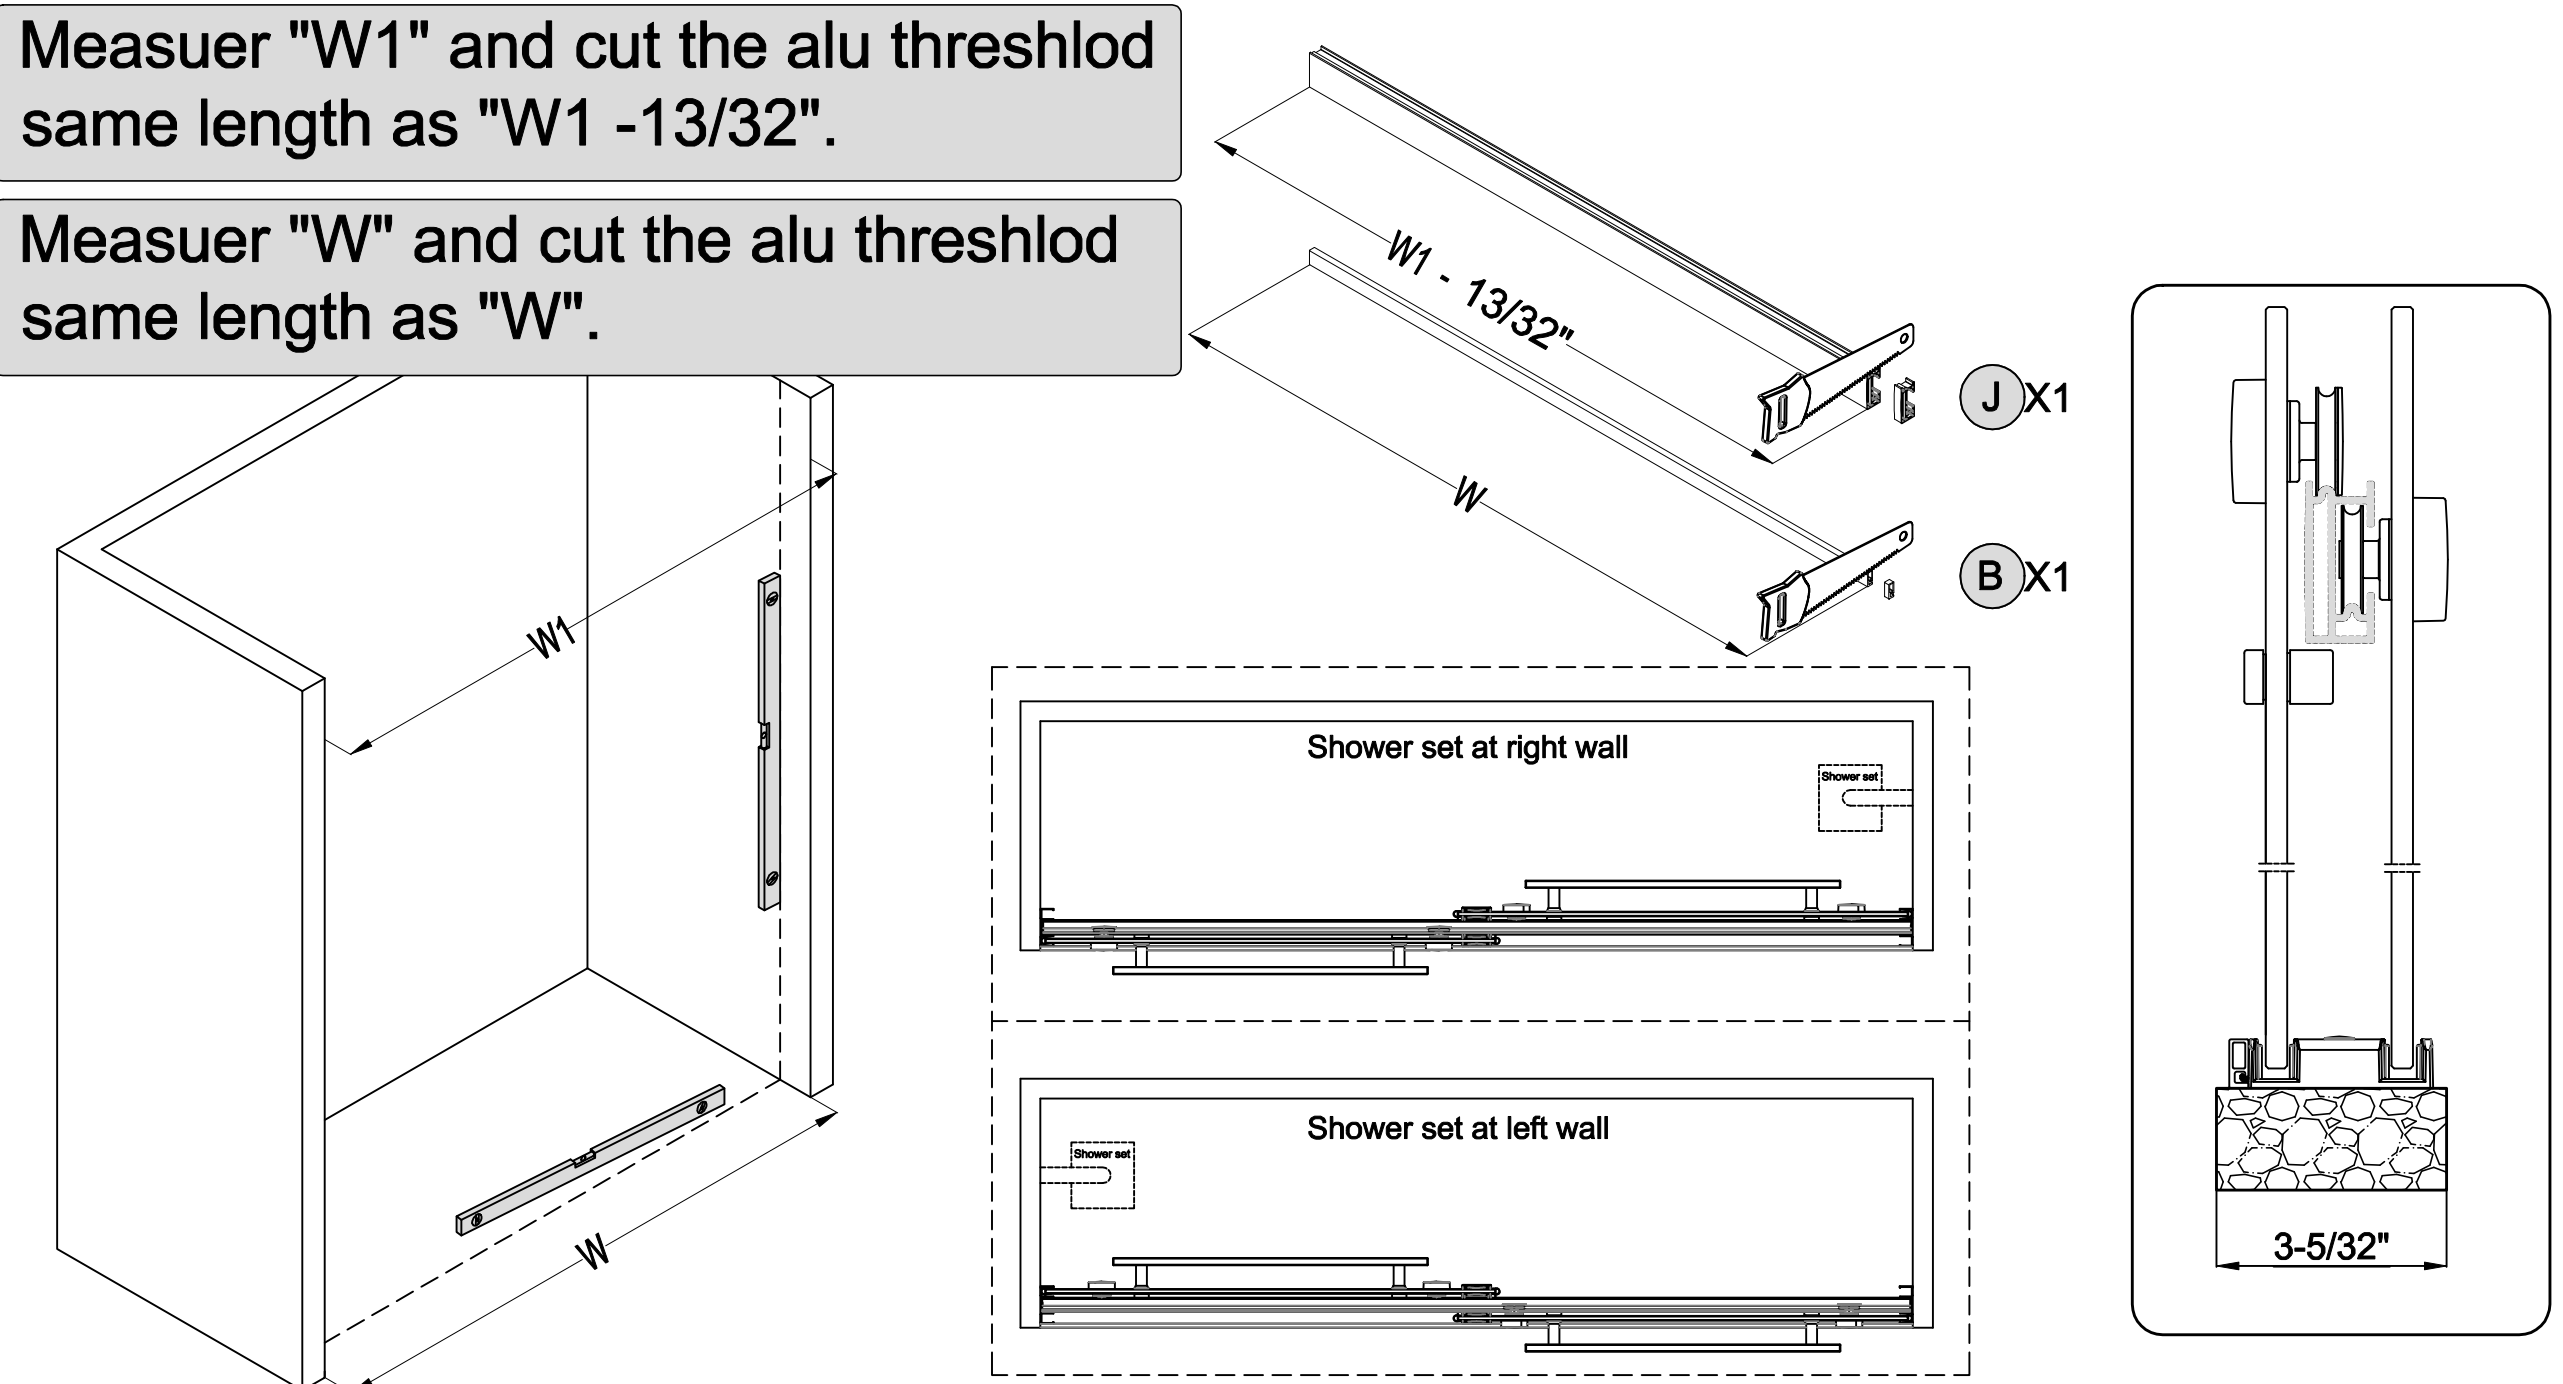


2


Wall Jamb & Wall Bracket Installation

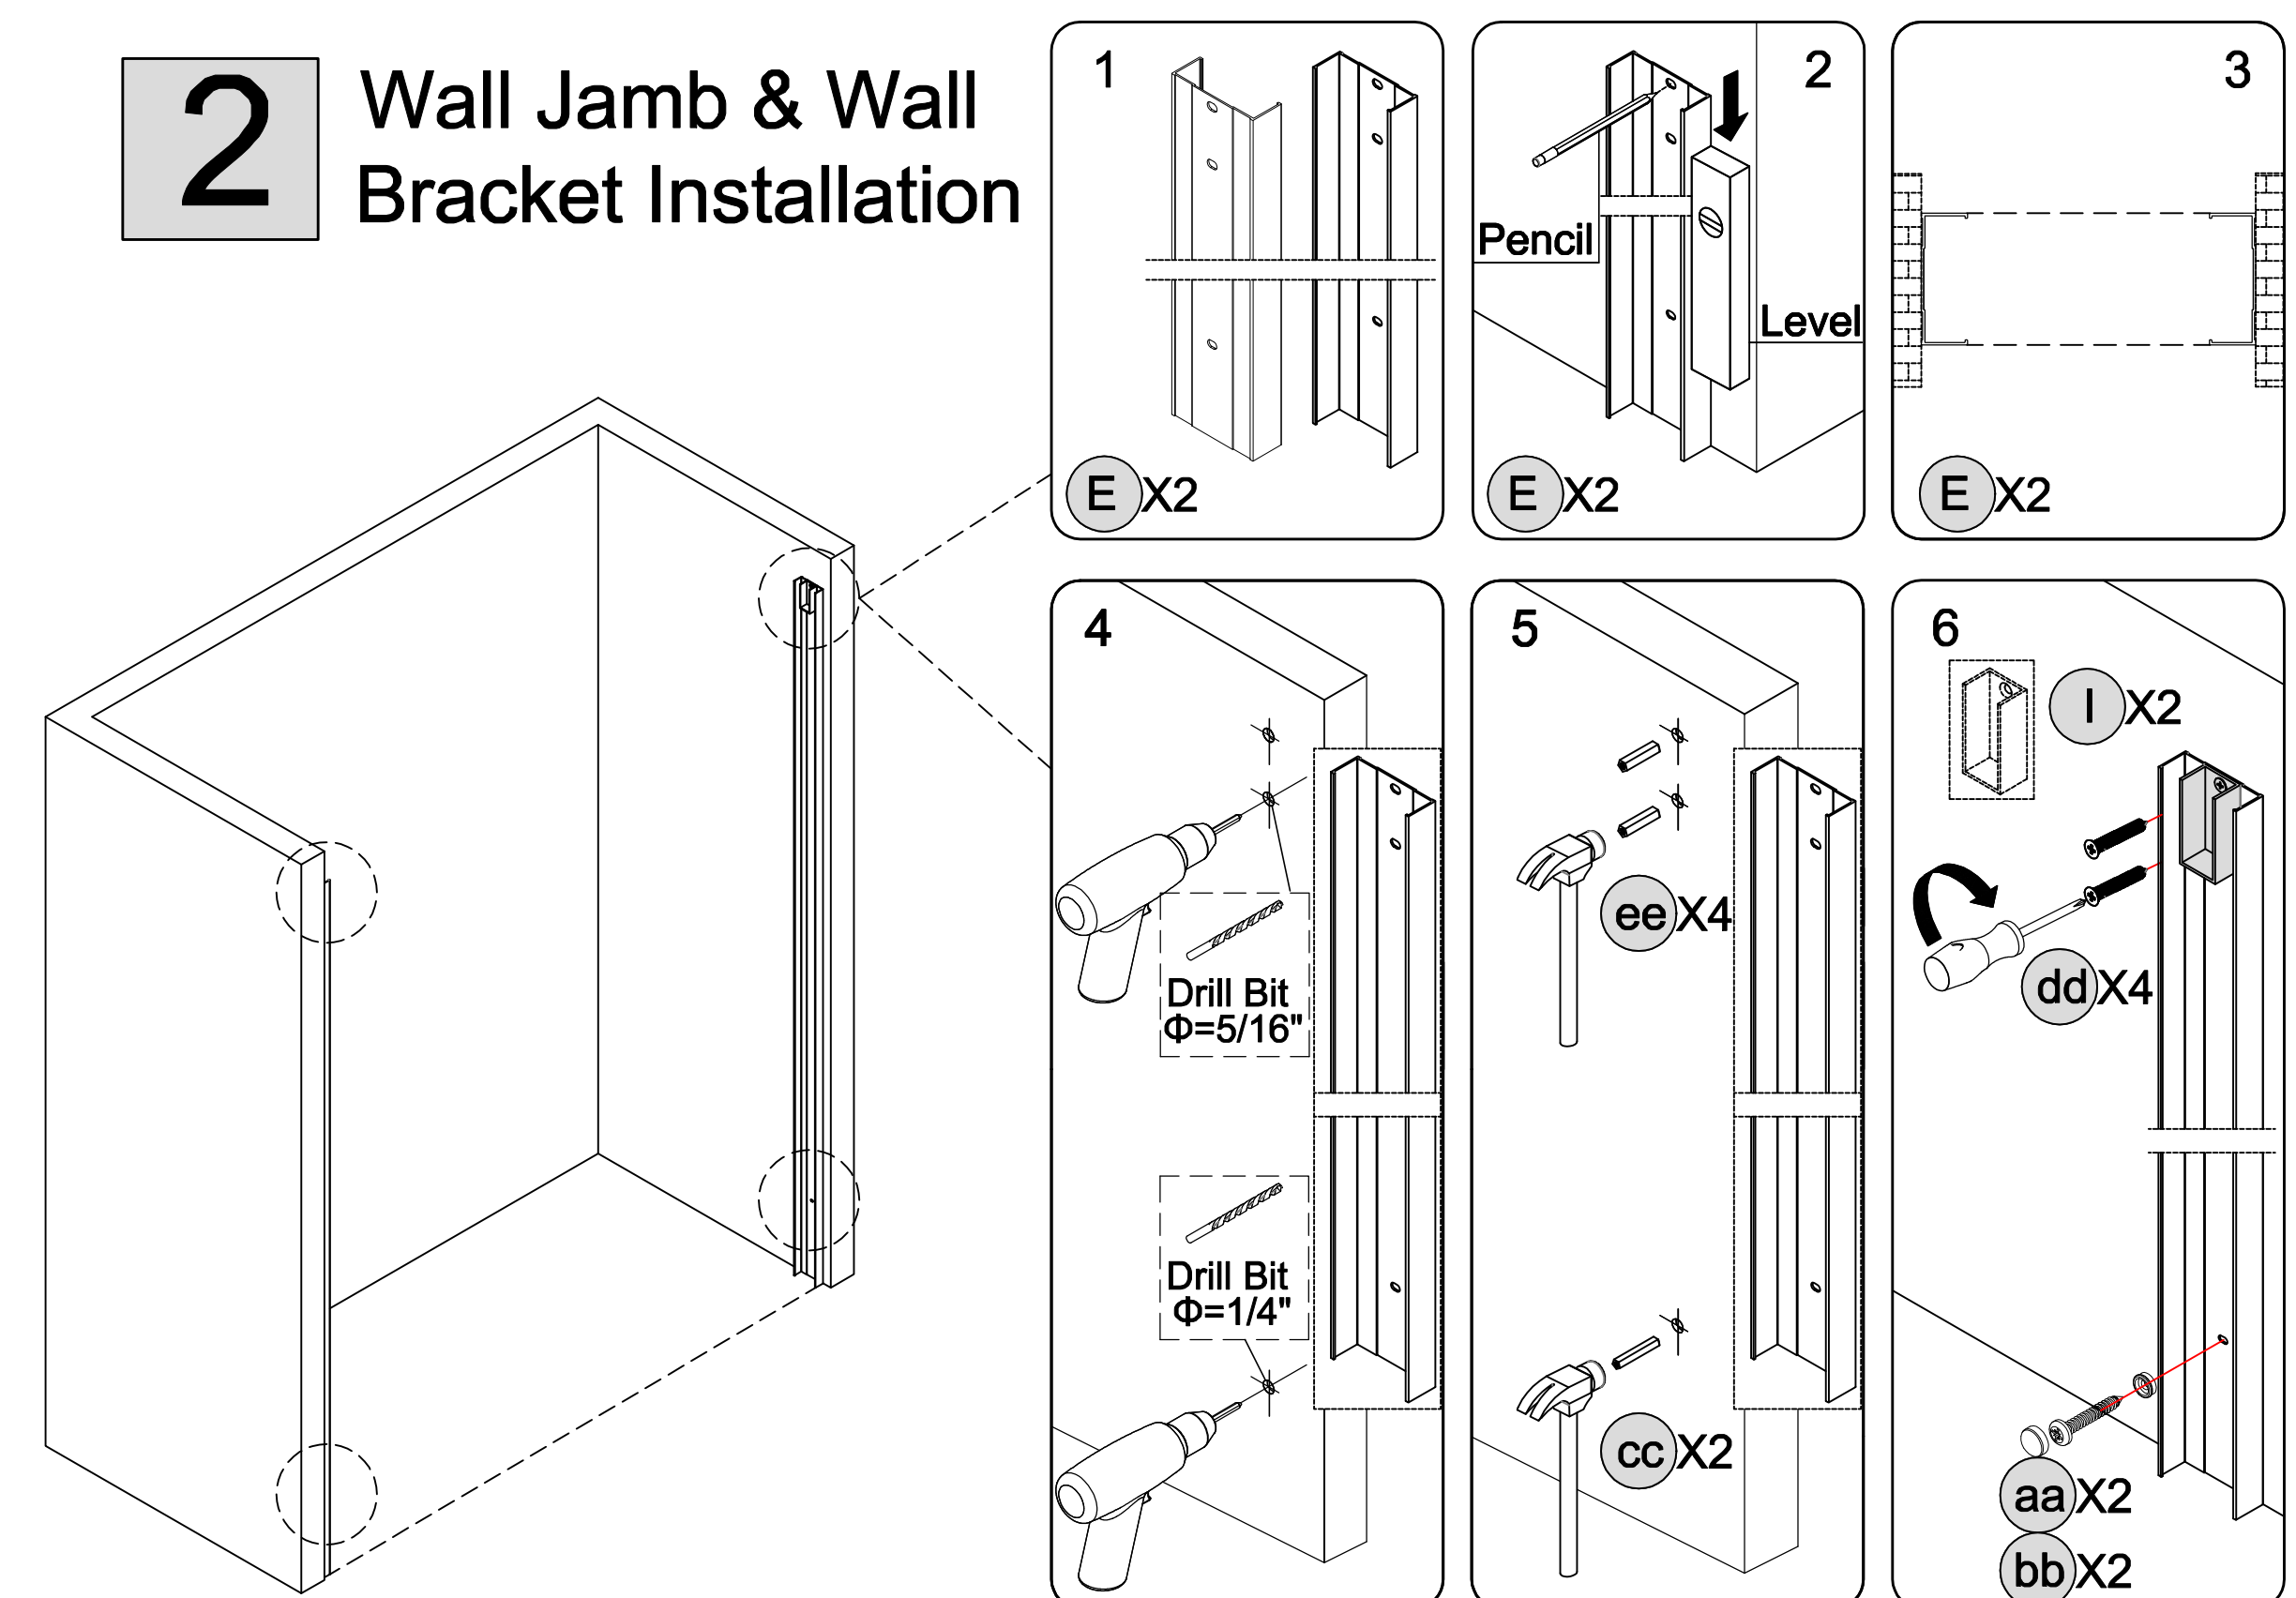


3 Top Track & Roller(inside) Installation

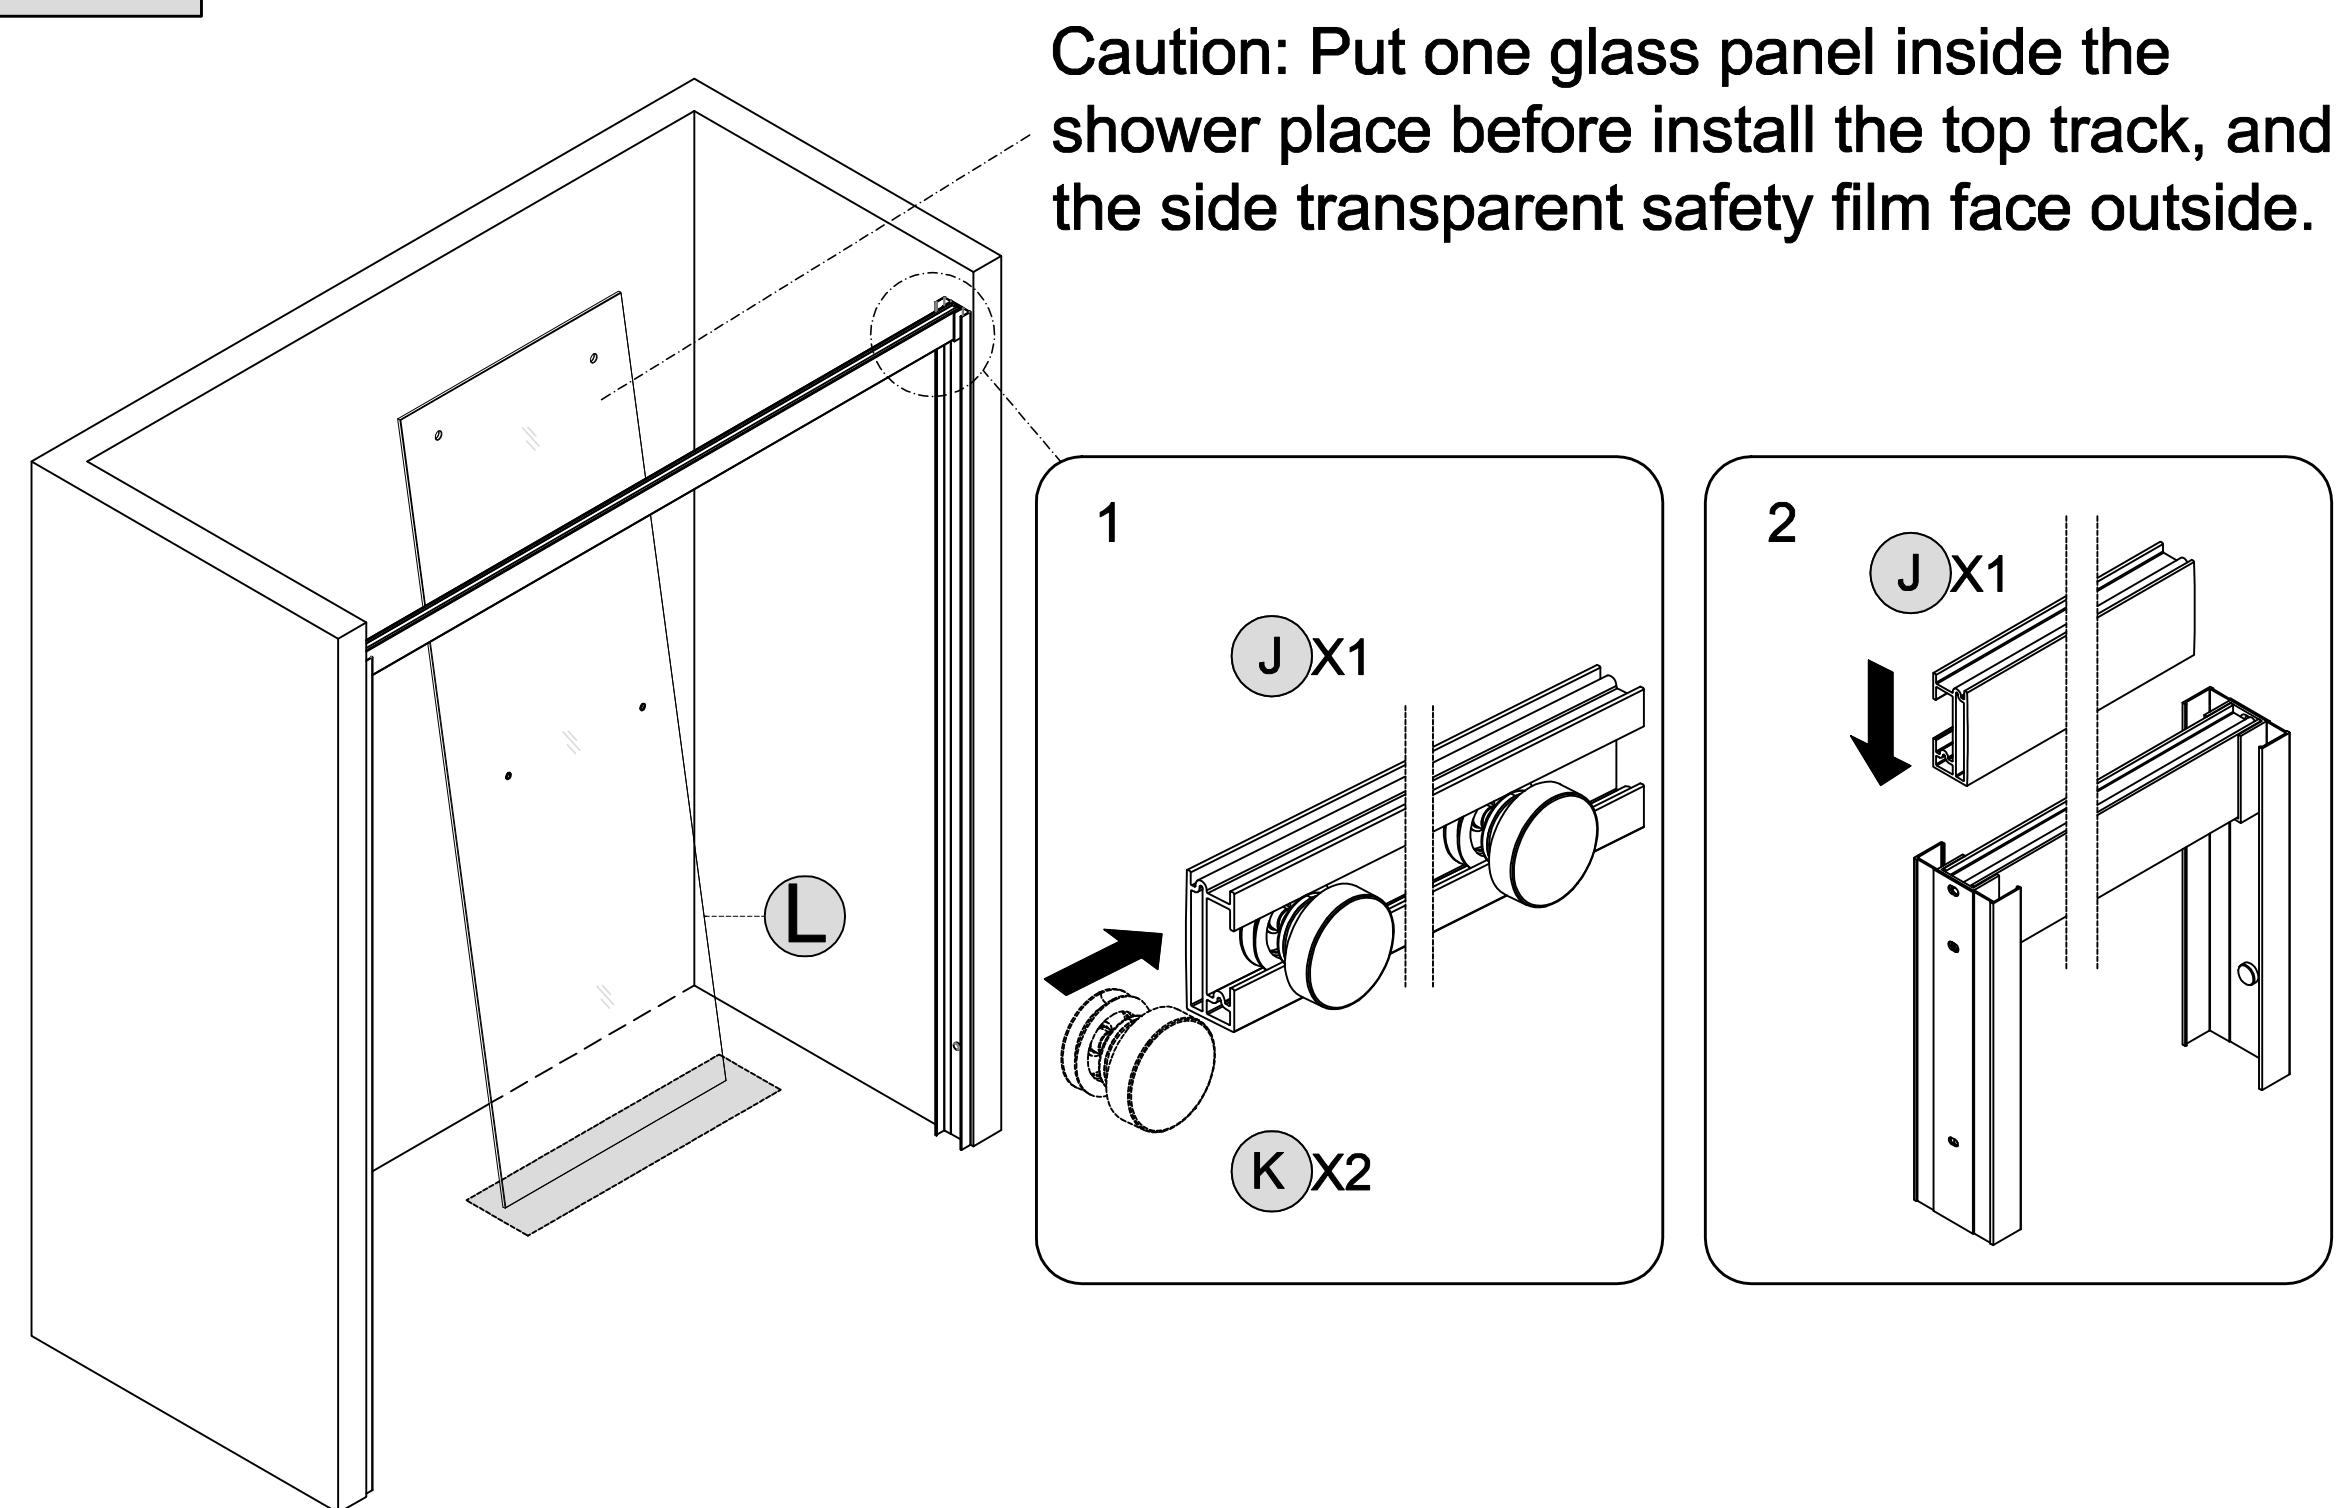


4 Bottom guild & Water seal Installation

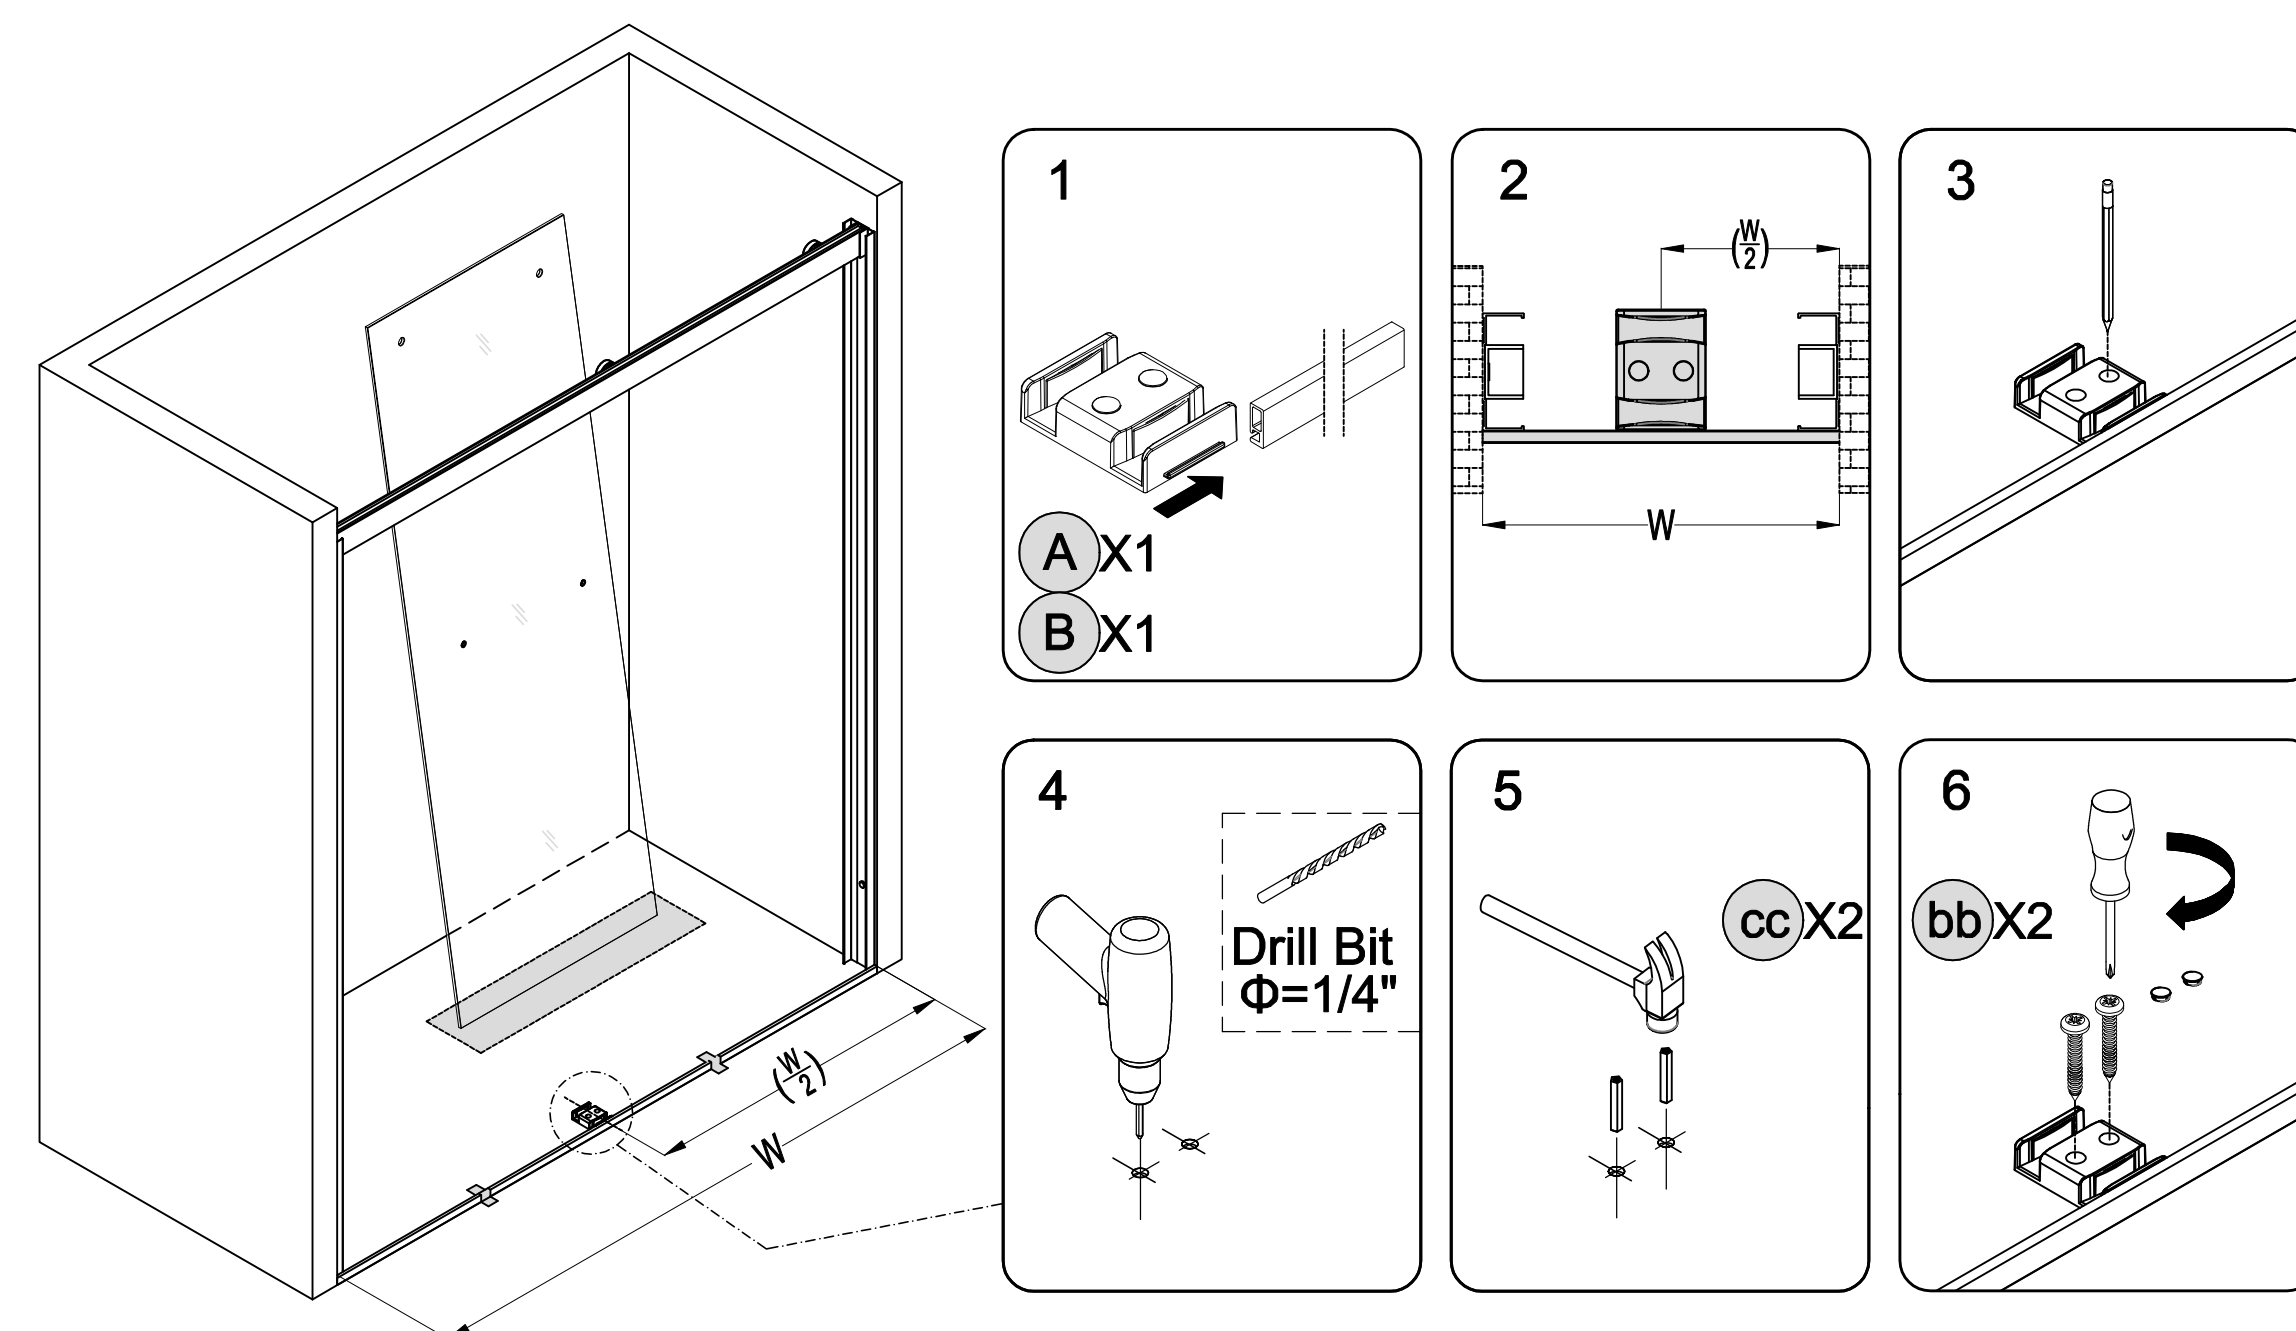


5 Door panel(inside) Installation

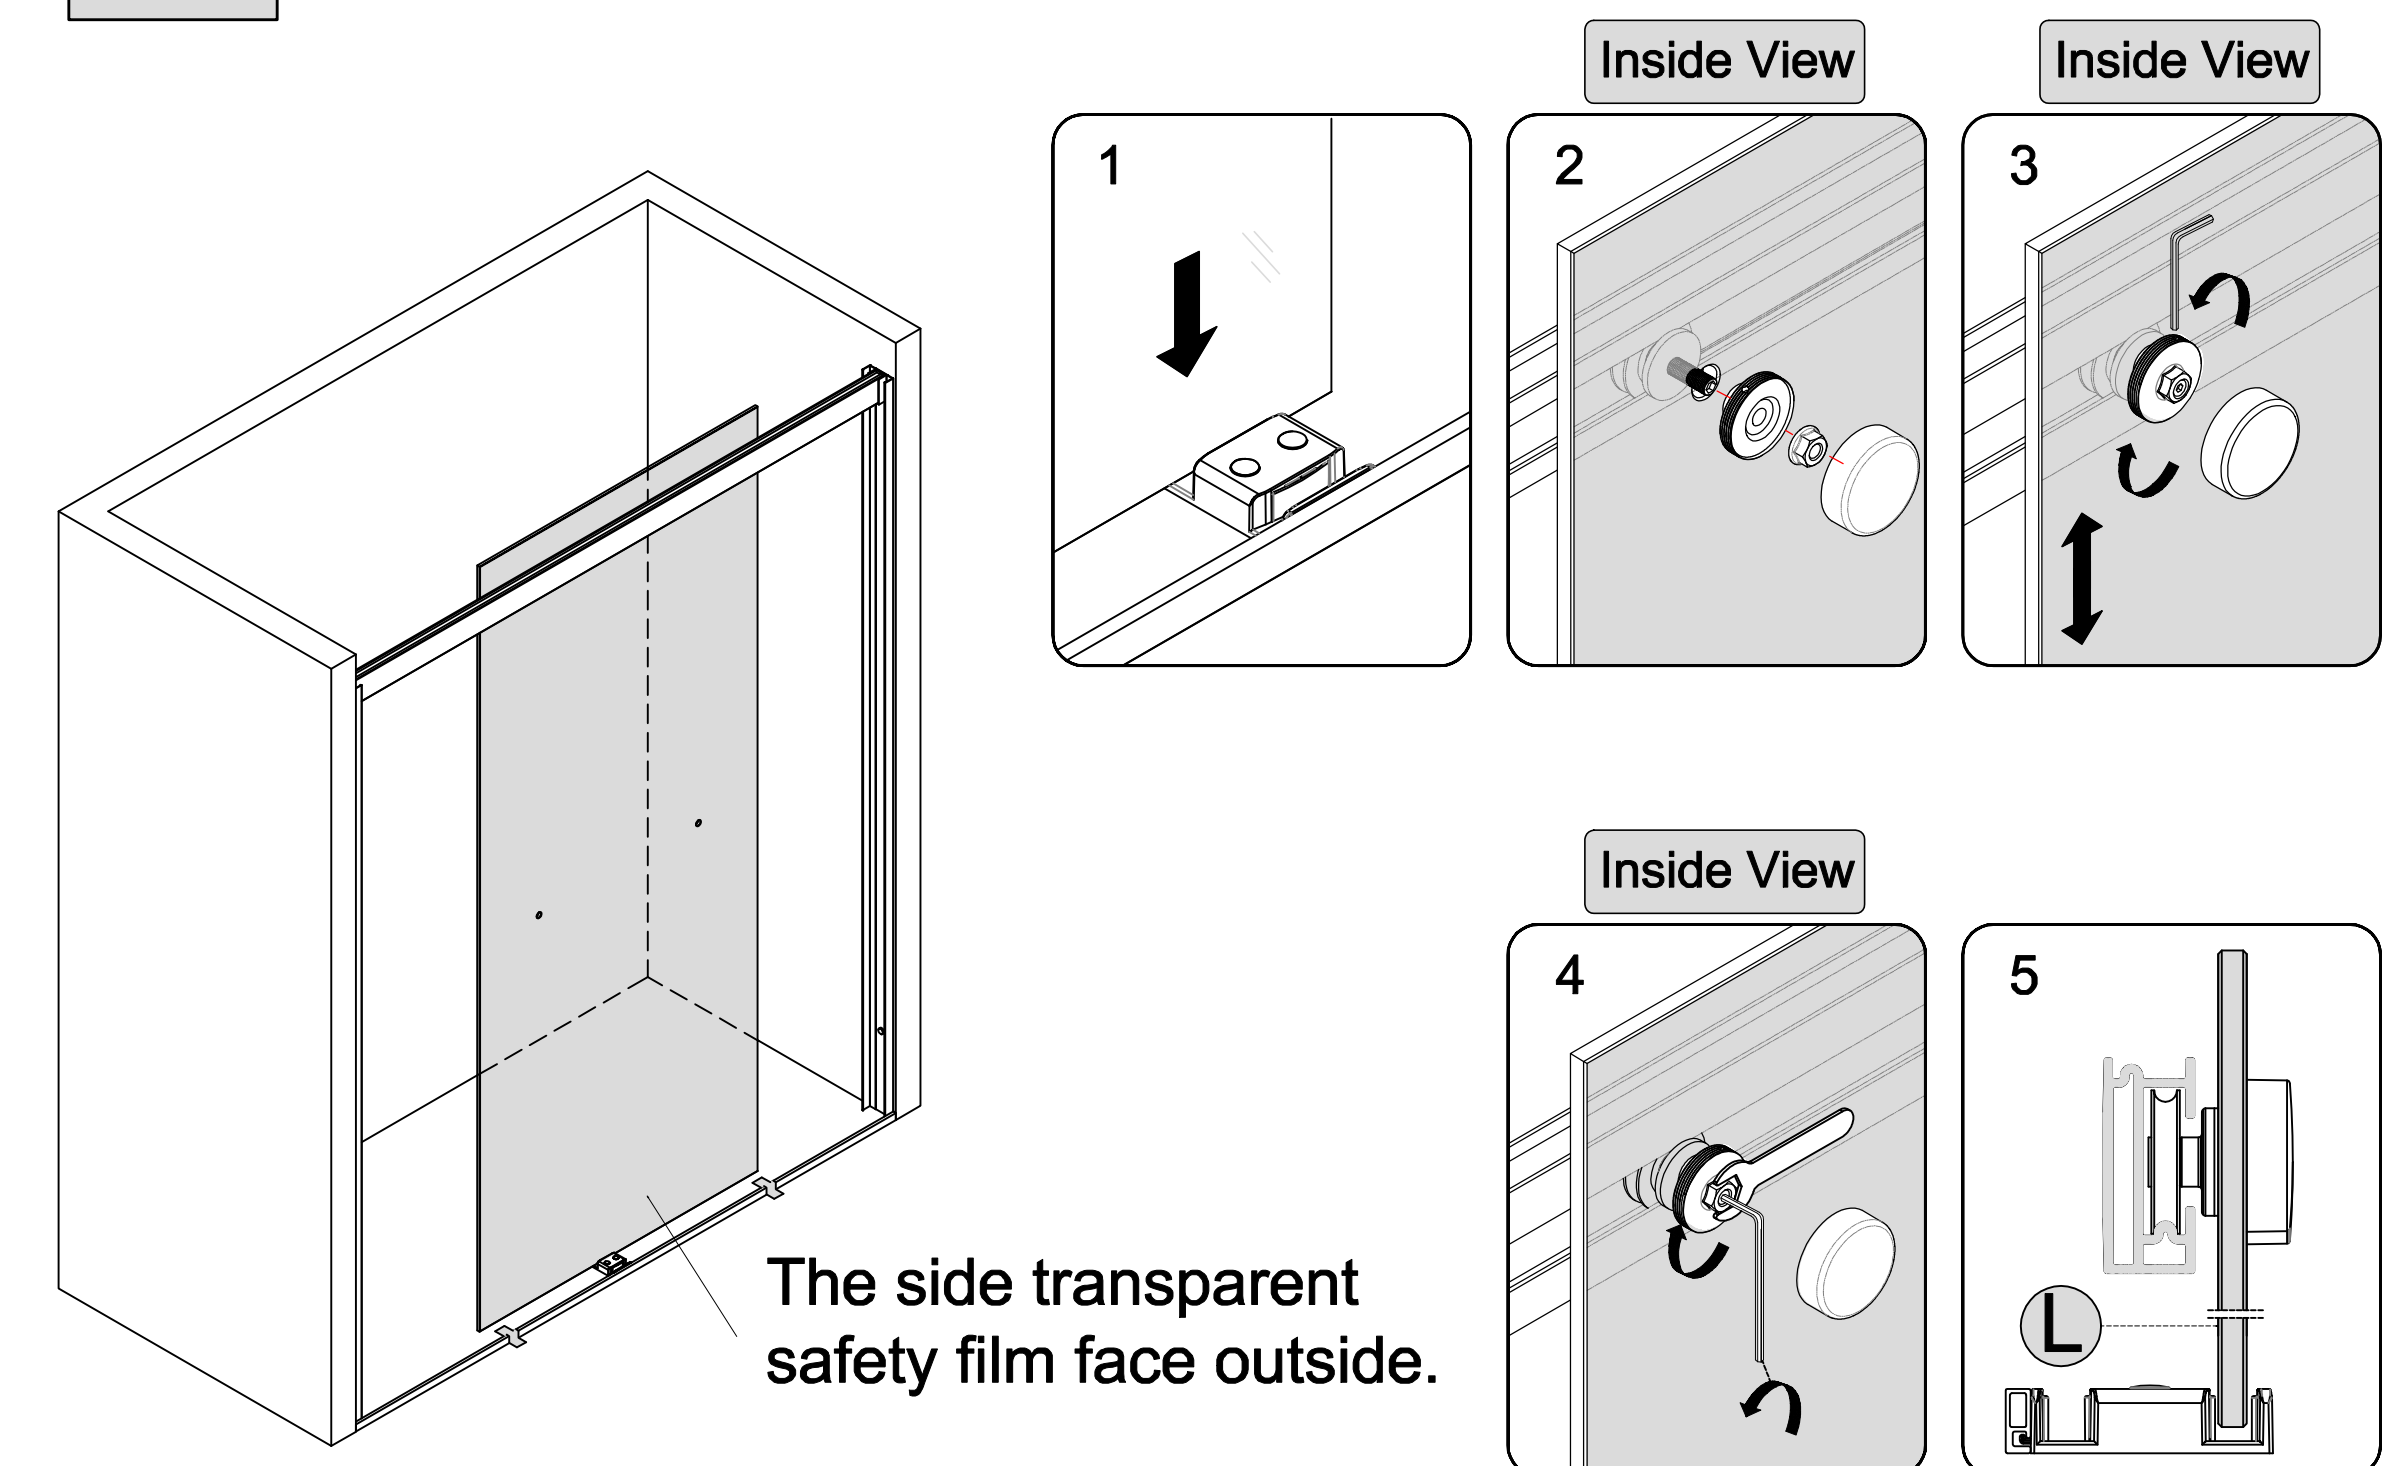


6 6-1 Door panel(outside) & Roller(outside) Installation

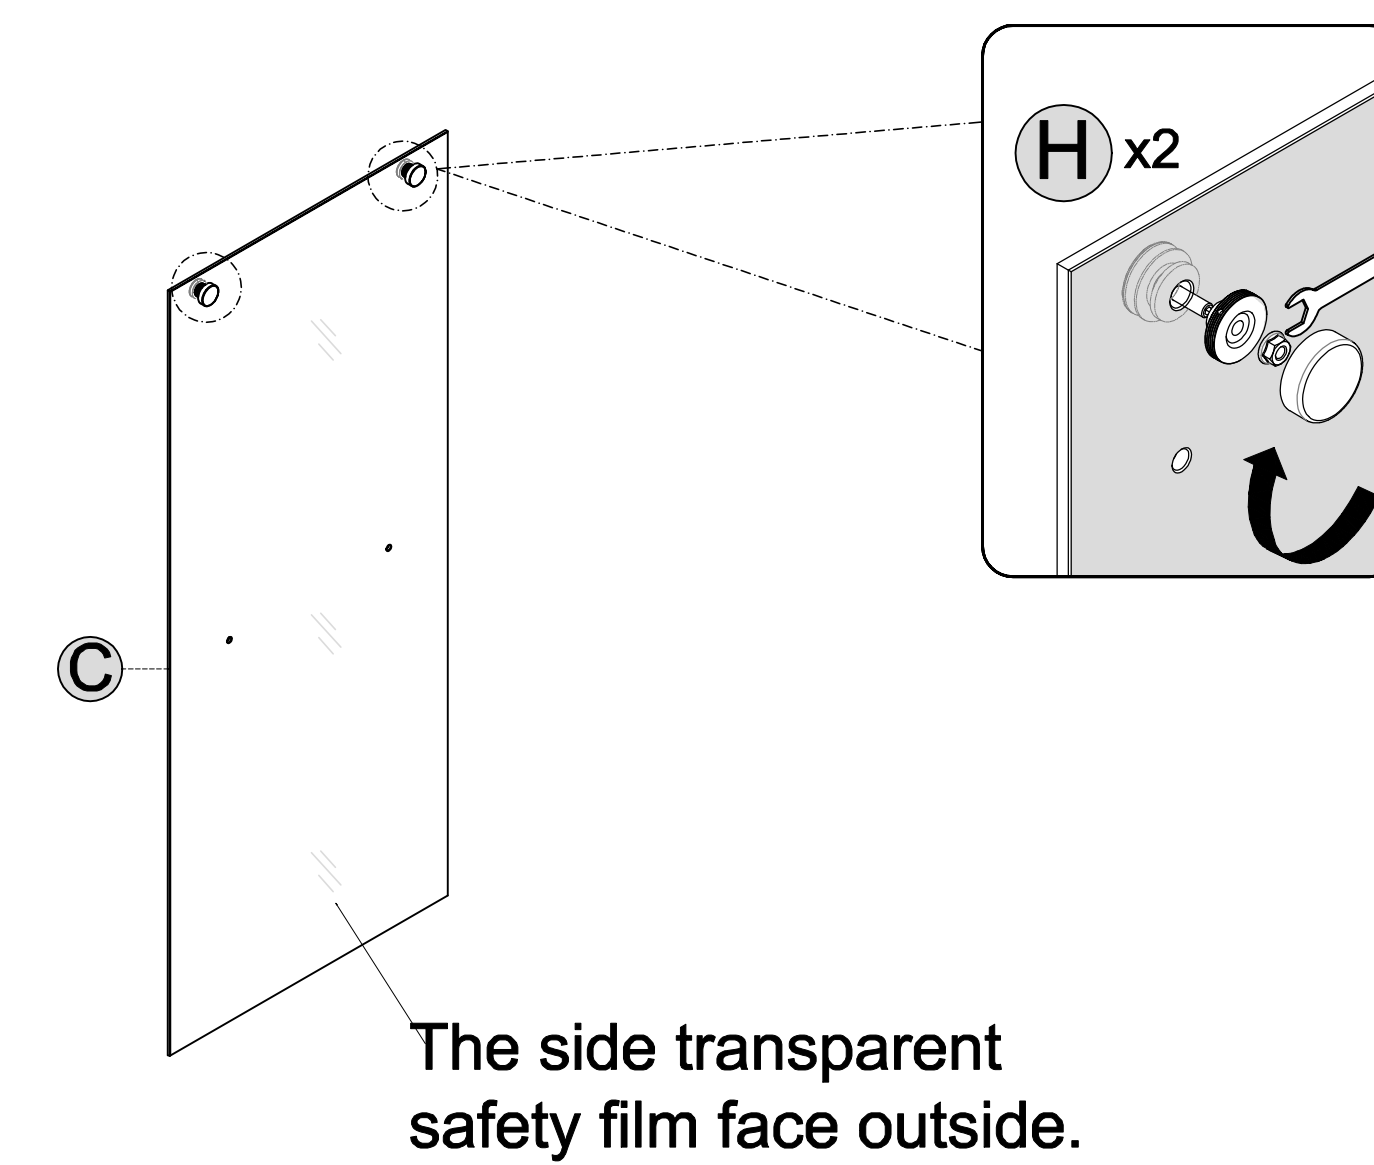

6-2 Door panel(outside) & Roller(outside) Installation

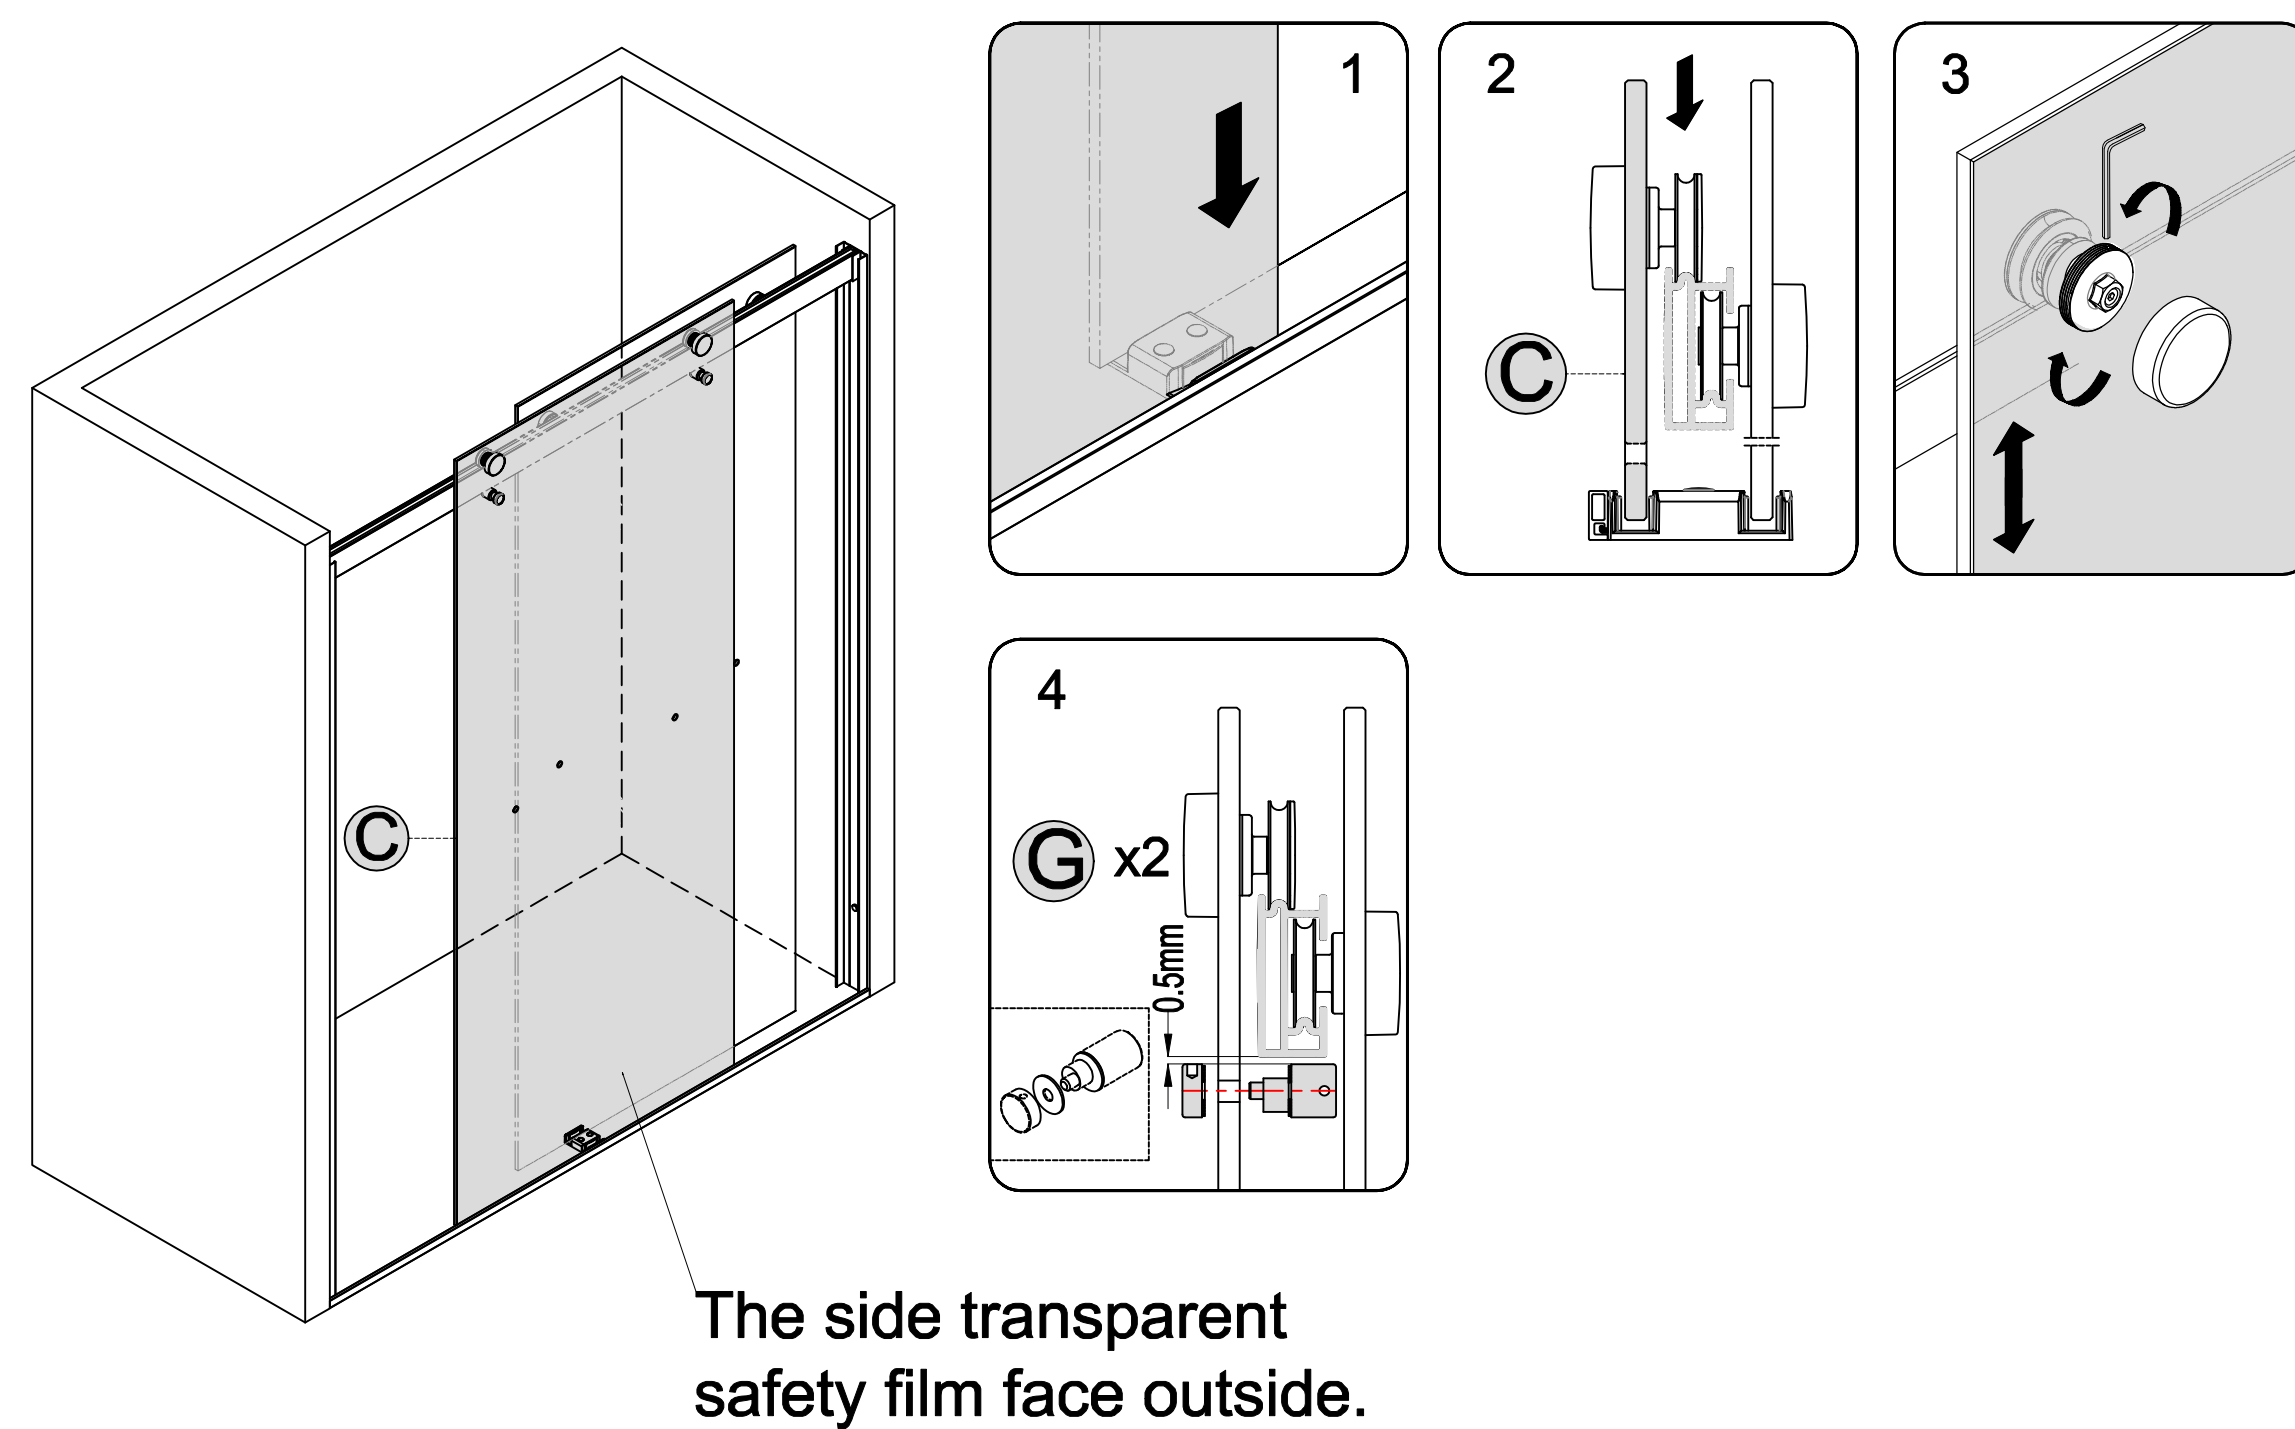


7 Determine the G & H position

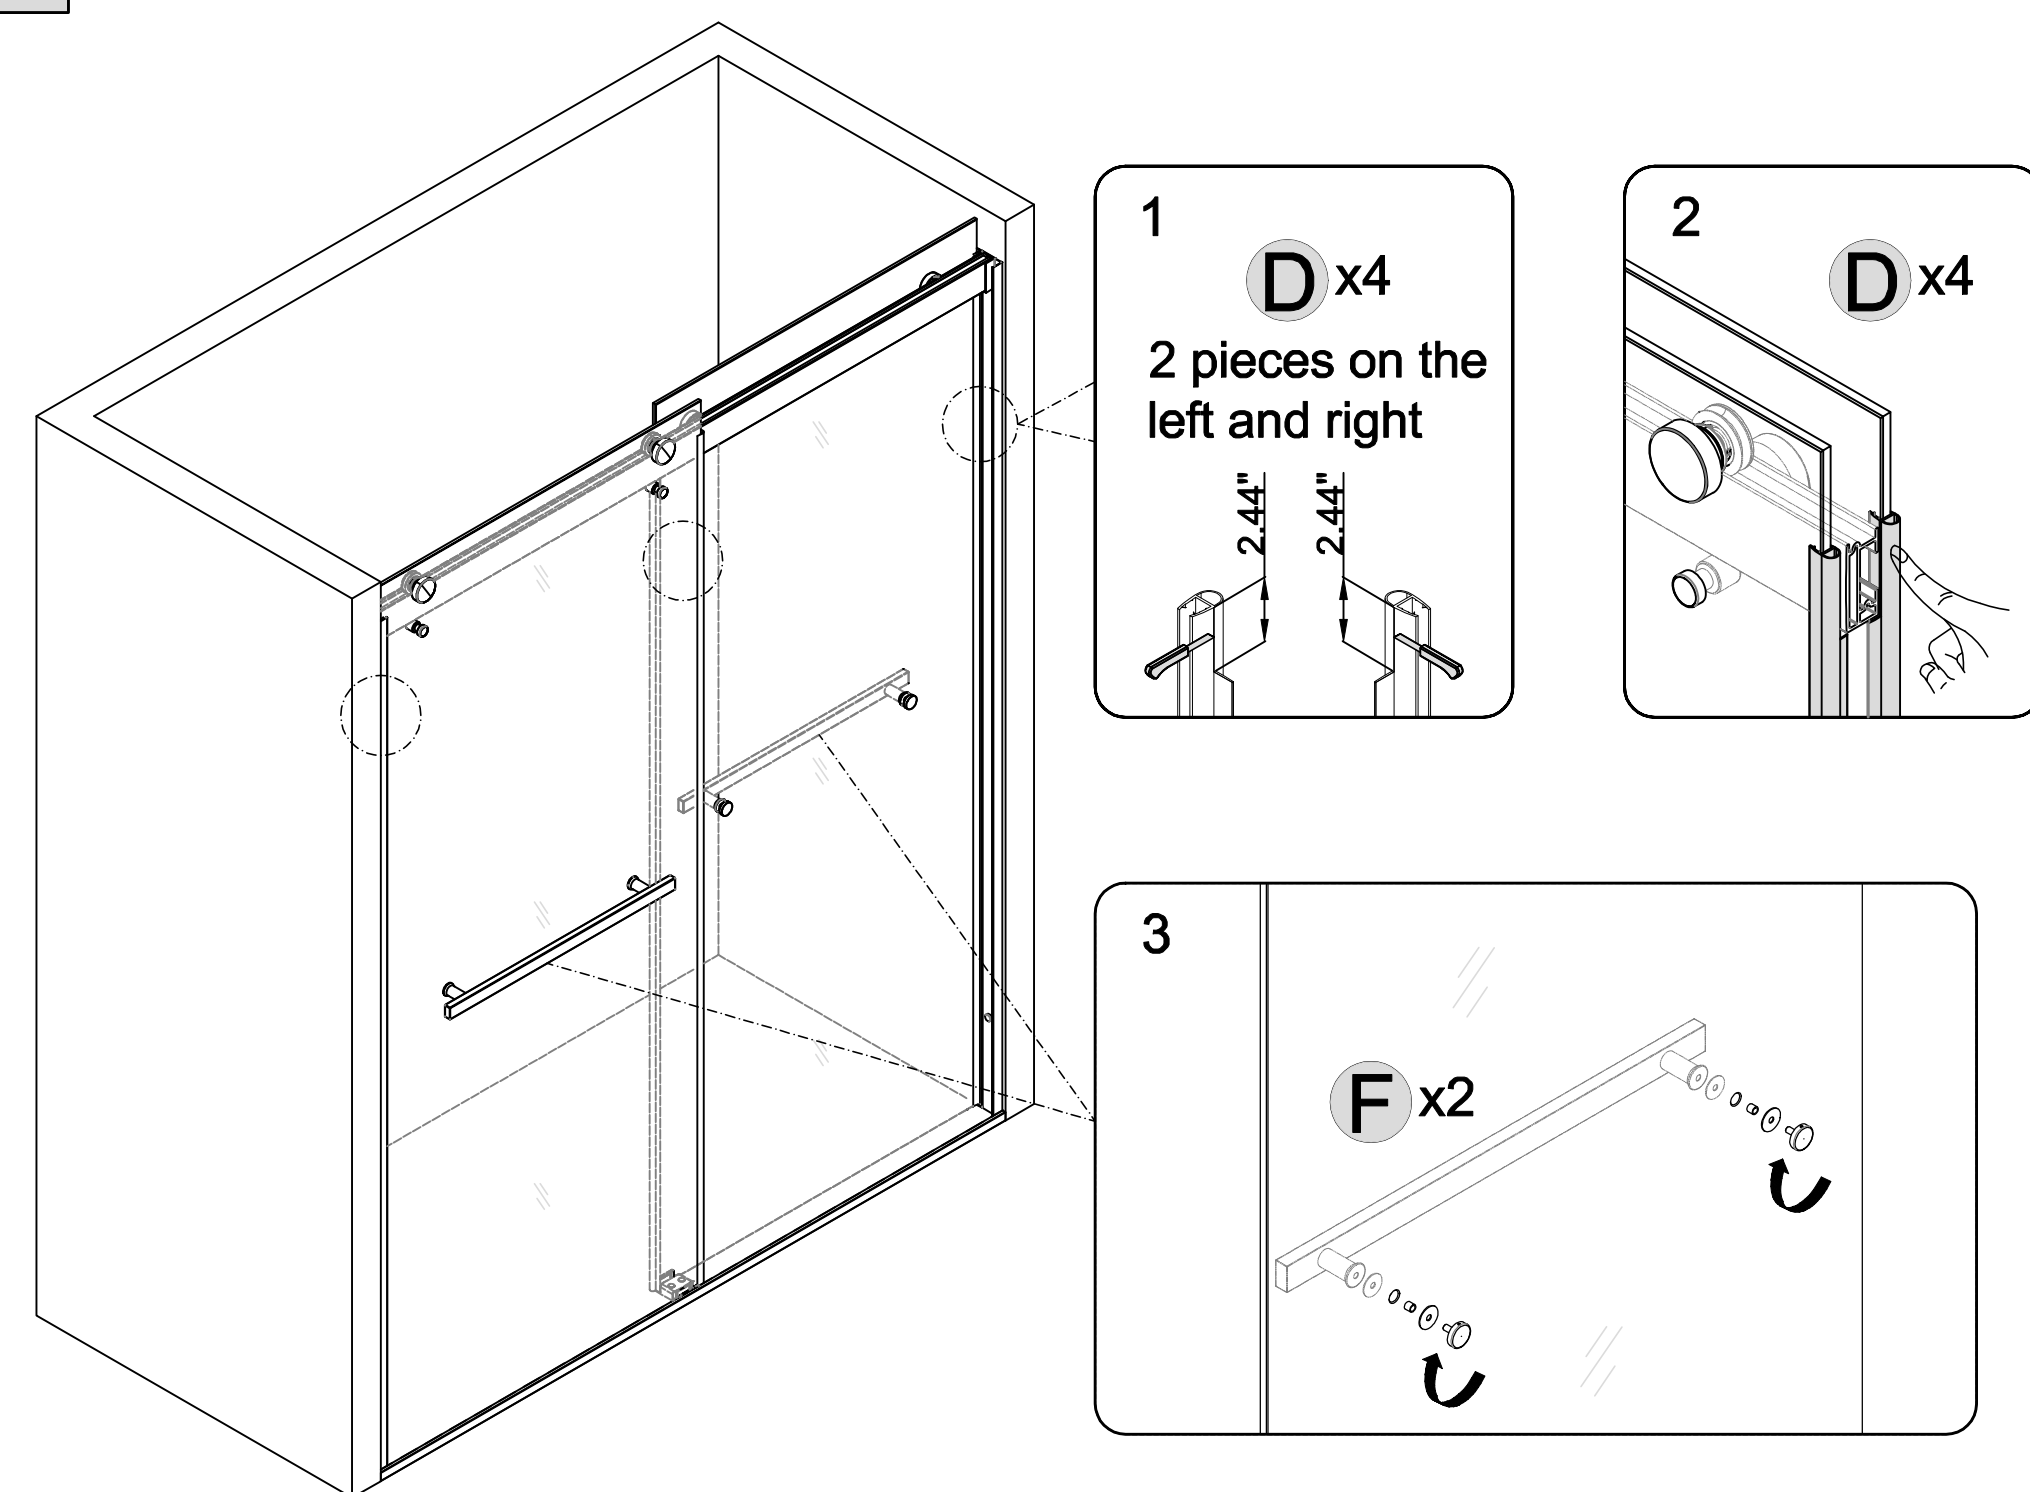


8

8 Check the door panel switch

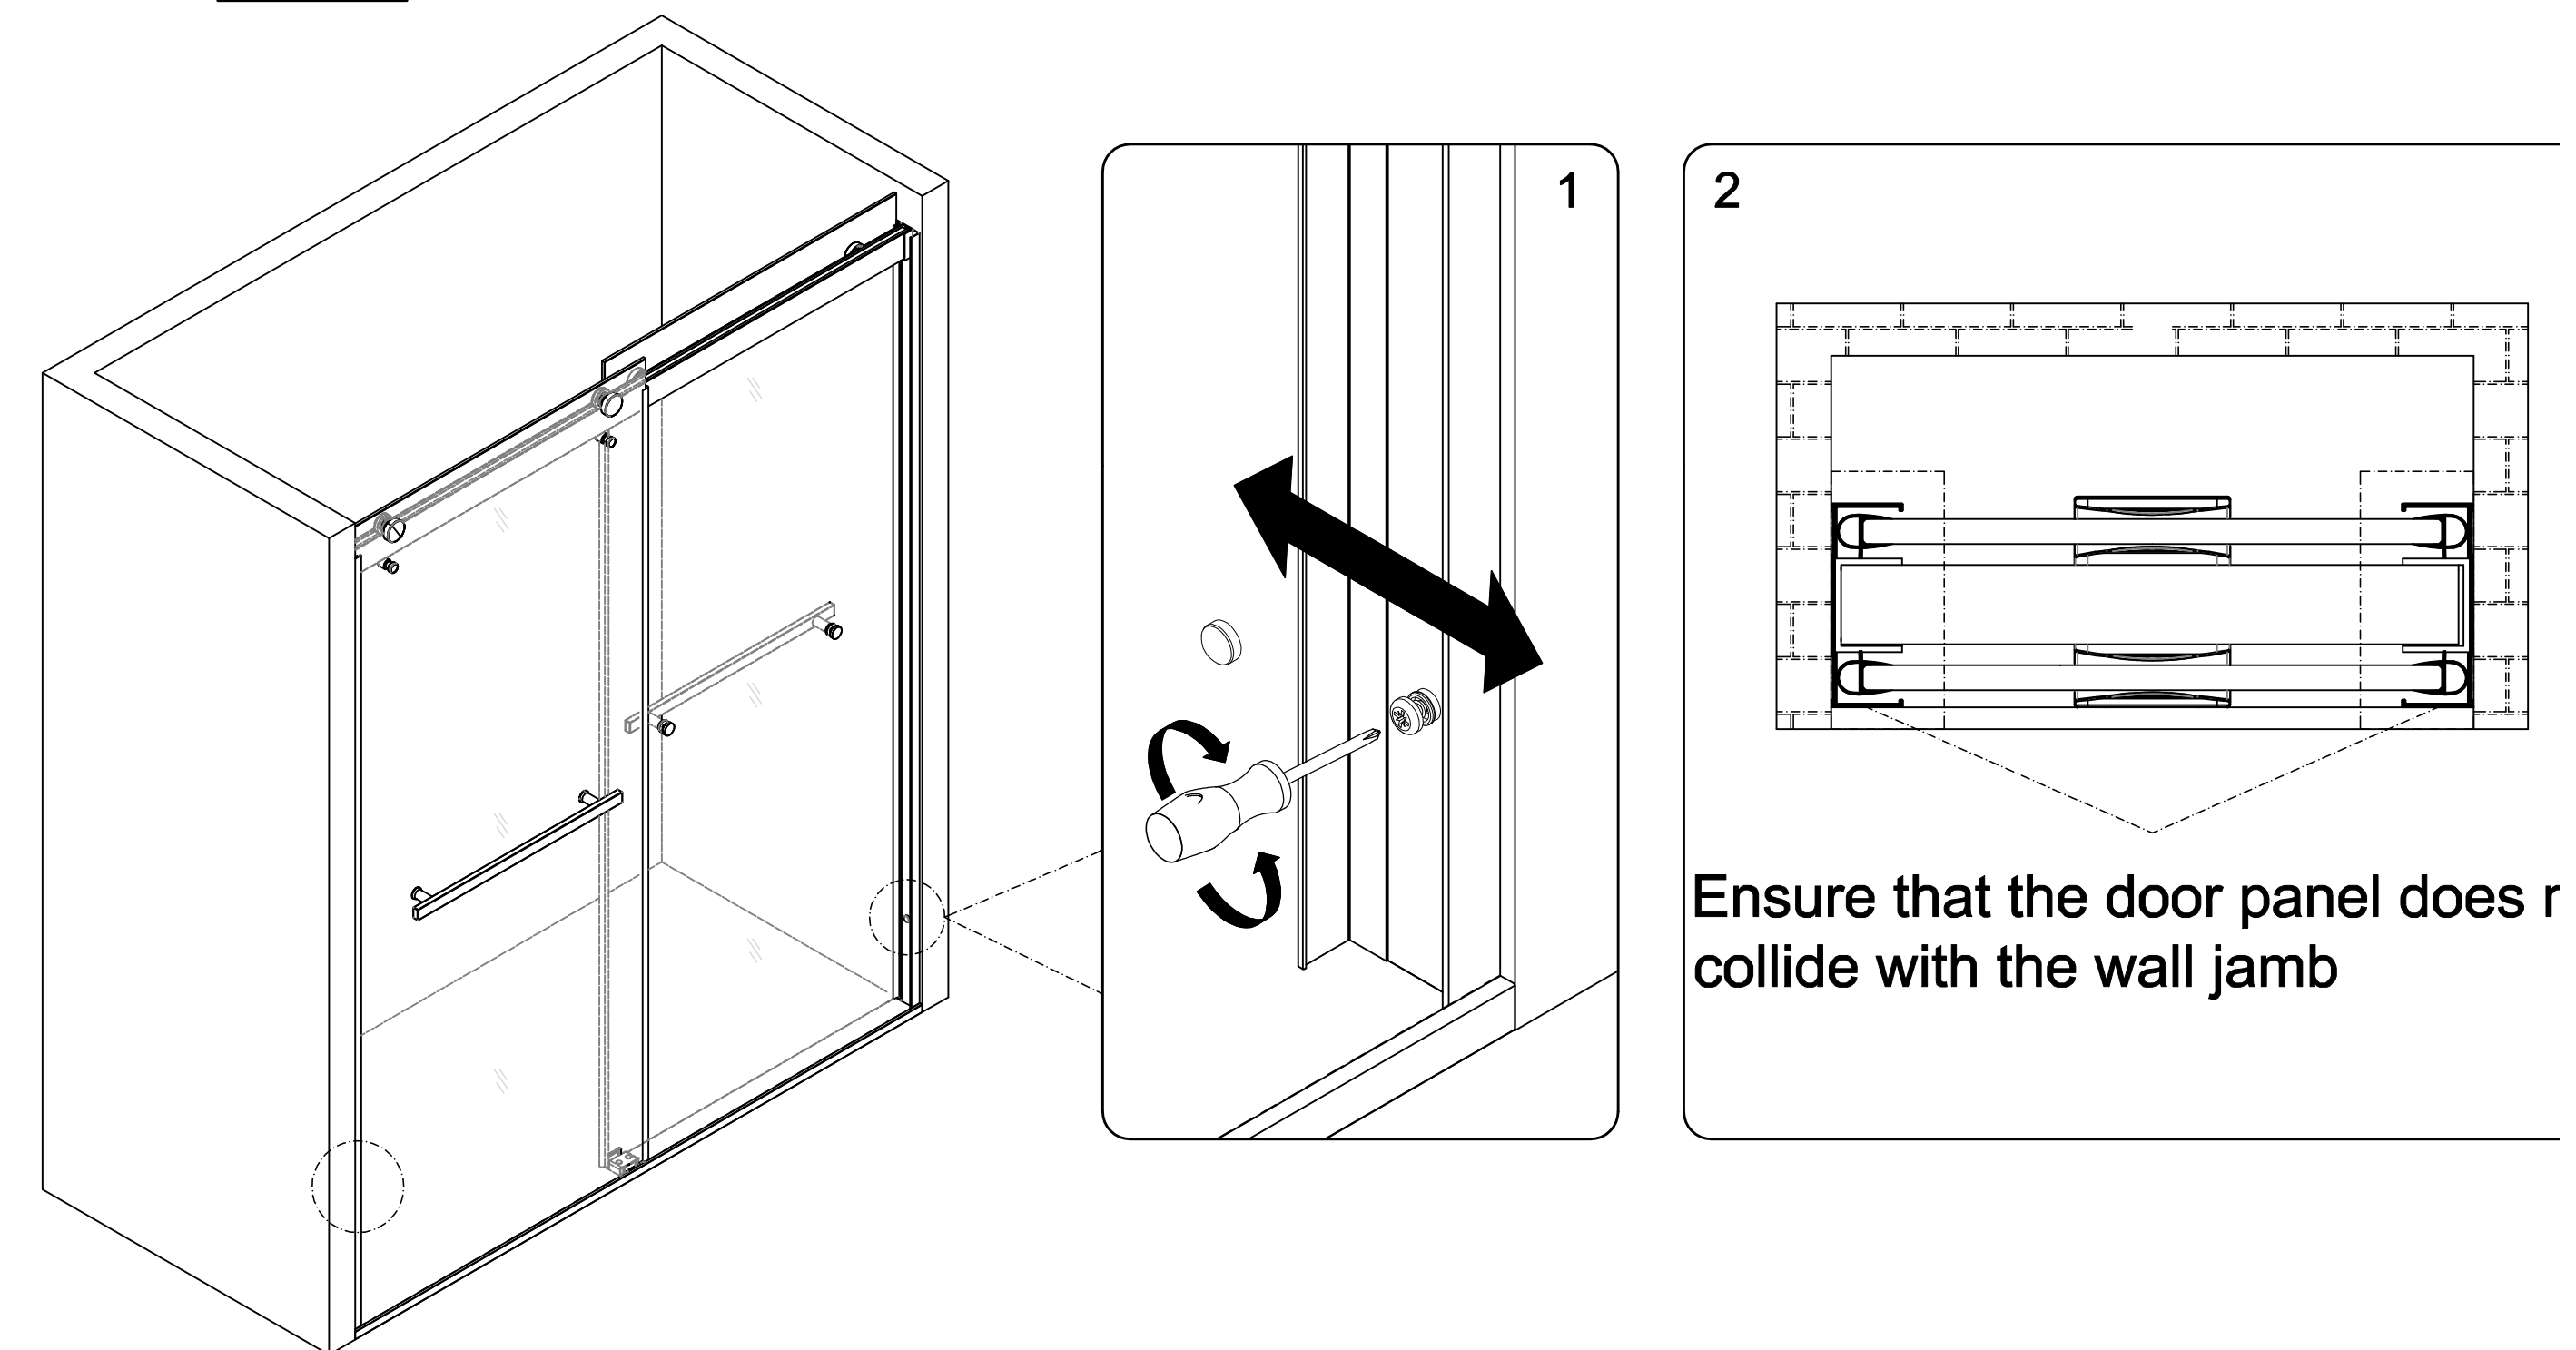

9 SEALING

Ensure that the Shower door closes tightly and opens smoothly.
Apply a good quality silicone sealant along the wall Jamb(C) and Water seal (B) .
 Allow 24 hours for silicone to dry before use.

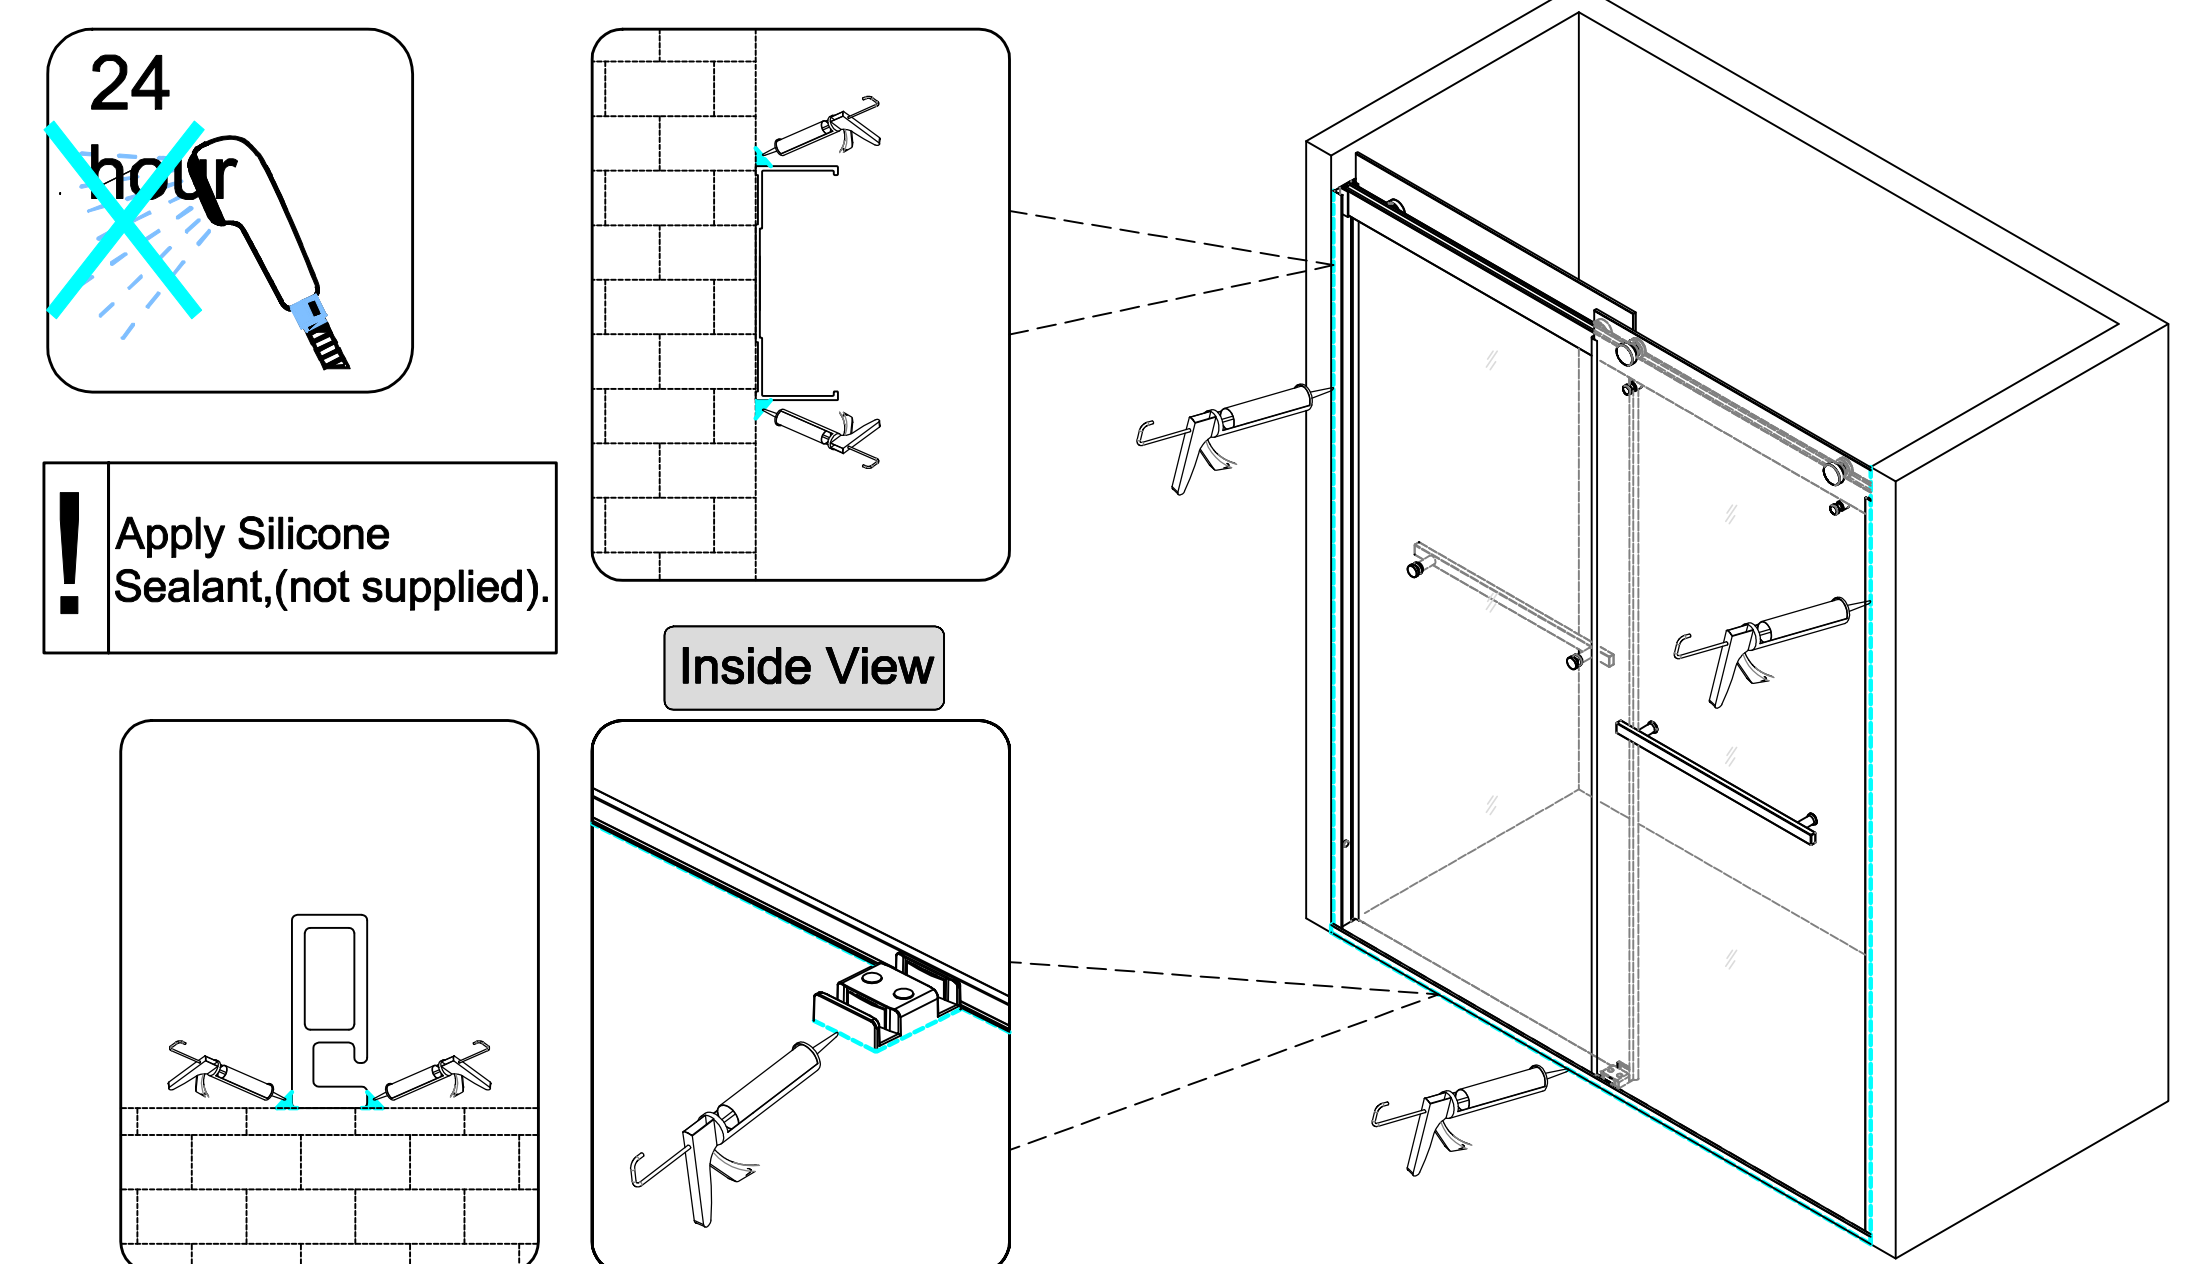

9