


LDC001 LDC001A

USER MANUAL LED RECESSED DOWNLIGHT



- 01 MAKE HOLE PATTERN
- 02 SWITCH OFF MAIN
- 03 CONNECT POWER SUPPLY TO THE MAIN
- 04 CONNECT LAMP TO POWER SUPPLY
- 05 HOLD SPRINGS
- 06 PUT LAMP INTO CEILING
- 07 ADJUST BEAMING
- 08 SWITCH ON THE MAIN AND LIGHT ON

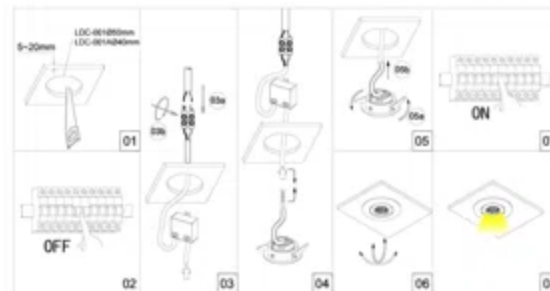

Lamp: CREE XPE LED
 Color: 6000-4000/3000K
 Color rendering: Ra80
 Input: 100V-240V AC
 Current: Constant 700mA
 Frequency: 50/60Hz
 Watt: 3W
 Adjustable: ±30°
 Life span: 20,000hrs
 Operating temp: -20°C~+40°C
 Indoor use only
 IP20
 Dimmable:

Cautions: a. Installed by qualified electrician
 b. Use only power supply supplied
 by manufacturer for products guarantee