

USER'S MANUAL

Product installation, after service, product certificate

WALL BASIN FAUCET

INSTALLATION INSTRUCTION

1. Installation Procedures




Figure 1




Figure 2

- List of accessories
- ① Main body of the faucet
 - ② Decorative cover subassembly
 - ③ Handle subassembly
 - ④ Spout subassembly

1. Firstly confirm whether the wall thickness can completely imbed the main body of the faucet (Figure 1).
2. Remove the handle subassembly, the decorative cover subassembly and the spout subassembly separately from the main body of the faucet (Figure 2).

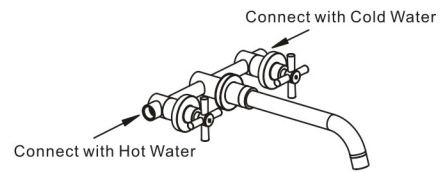


Figure 3

3. Fix the main body of the faucet to the wall and connect with the cold and hot water supply pipe. Facing to the faucet, the inlet hose on the left side is connected to hot water while the inlet hose on the right side is connected to cold water (Figure 3).

4. Place the decorative cover subassembly, the handle subassembly and the spout subassembly separately to the main body of the faucet. The handle marked with H is installed on the left side while the handle marked with C is installed on the right side (Figure 3)
5. Test whether there is any leakage from the joints.

2. Operating Methods

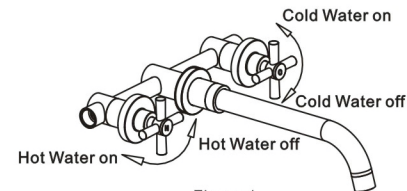


Figure 1

1. Shown as Figure 1, the left and right handles will control the hot water and cold water supply respectively. Turn the handle on the left side in a clockwise direction, increasing the hot water flow gradually; turn the handle on the right side in a counterclockwise direction, increasing the cold water flow gradually.