
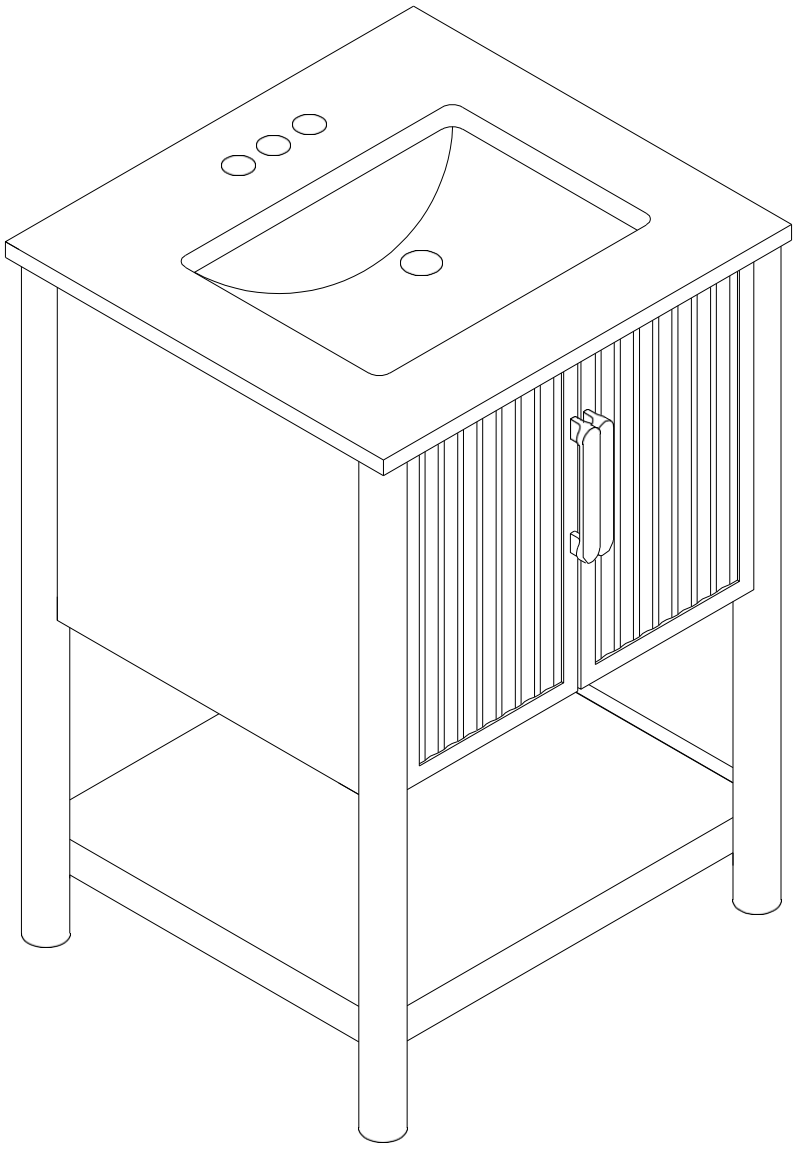


# Bathroom vanity


# BATHROOM VANITY INSTALLATION INSTRUCTIONS


Model: **SY -BV008-V24 WH**

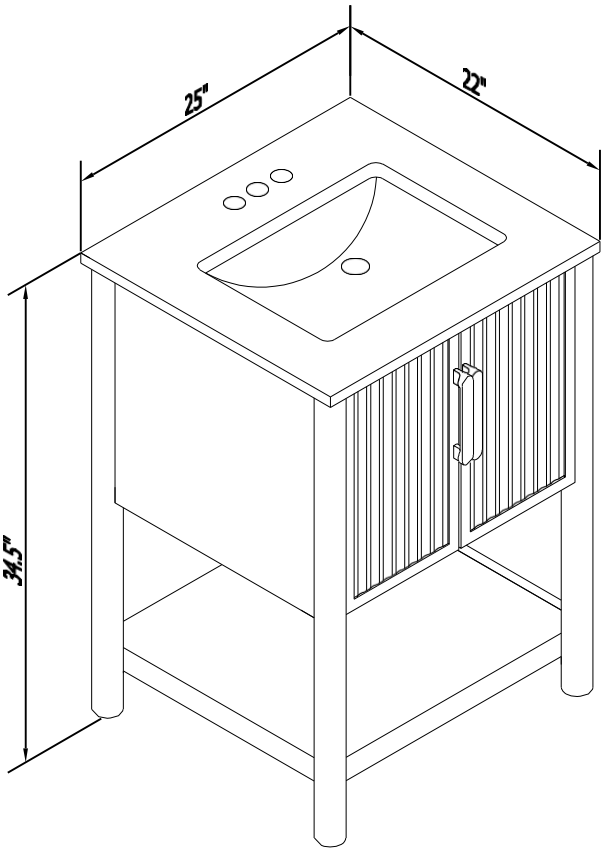



## DIMENSIONS


Please refer to the dimension diagrams for detailed measurements of the vanity and sink configuration.

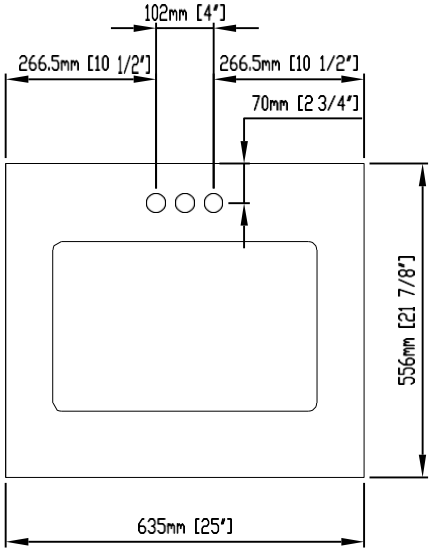
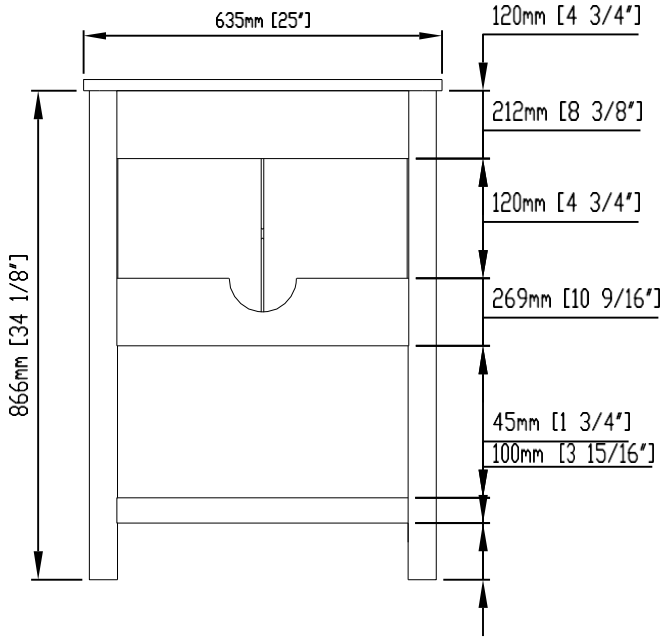
# PART LIST

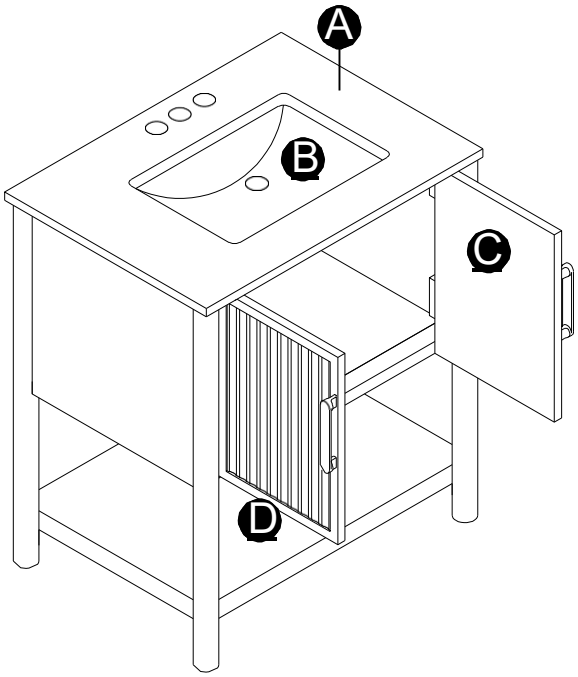


| PART | DESCRIPTIONS | QUANTITY |
|---|---|---|
| A | Countertop | 1 |
| B | Basin | 1 |
| C | Door (Left) | 1 |
| D | Door (Right) | 1 |
| E | Handle | 2 |
| F | Hinge | 4 |


| TOOLS REQUIRED (NOT INCLUDED) | |
|---|---|
|  | Silicone sealant |
|  | Pencil |
|  | Screwdriver |
|  | Level |
|  | Measuring tape |

# HINGE ADJUSTMENT INSTRUCTIONS

Cabinet doors can be adjusted in **three directions** to achieve proper alignment.


## Depth Adjustment (In / Out)

Turn adjustment screw **(A)** to move the door **inward or outward**.

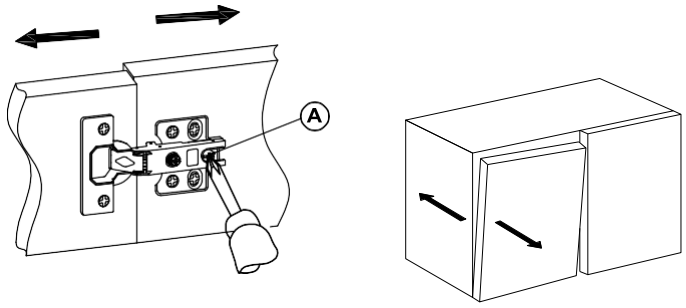



## Side Adjustment (Left / Right)

Turn adjustment screw **(B)** to move the door **left or right**.

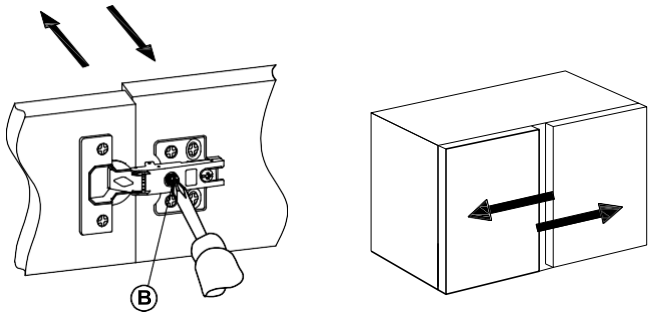


## Height Adjustment (Up / Down)

Loosen screws at position **(C)**, adjust the door **up or down**, then re-tighten the screws.

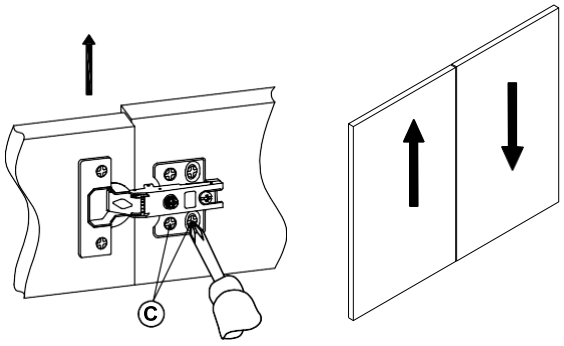


**Tip:**
Make small adjustments and check the door alignment after each adjustment.

## IMPORTANT SAFETY INFORMATION

- Do not fully tighten screws until all parts are properly aligned.
- Over-tightening hardware may damage the product.
- Professional installation is recommended if you are not familiar with plumbing connections.
- Keep all small parts away from children during assembly.