

INSTALLATION INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig. 1)

3. Loosen hex nuts (D) on canopy (H) with wrench (J) (not included), remove lock washers (L), metal washers (E), canopy (H), and swivels (G).
4. Secure rod (Y) onto all thread (S) on top of fixture body. Place plastic washers (W), glass balls (X), plastic washers (W), and threaded metal ring (Z) over all thread on rod (Y).
5. Determine the desired hanging height and thread rods (F1, F2 and F3) to all thread on rod (Y). Secure swivels (G) onto rods (F1). Carefully pass wires through each rod during assembly.
6. Align canopy (H) over swivels (G). Followed by lock washers (L) and metal washers (E) and secure with hex nuts (D) via wrench (J) (not included).
7. Position mounting plate (A) on ceiling and mark the location of the four drywall anchors (K). Pre-drill holes for drywall anchors (K). Then insert drywall anchors (K) into ceiling.
8. Attach mounting plate (A) to junction box (not included) using mounting screws (B) (Size: #8-32N*L0.5") and wood screws (O) into drywall anchors (K). The side of the mounting plate (A) marked "GND" must face out.
9. The support cable is provided to support weight of the fixture while wiring. Align fixture to mounting plate (A) and attach hook (P) on the end of support cable (R) to a slot located on mounting plate (A). Carefully allow support cable (R) to support weight of fixture while wiring.

CONNECTING THE WIRES (Fig. 2)

10. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to mounting plate (A) using the green screw provided.
11. Tuck wire connectors neatly into junction box.

COMPLETING THE INSTALLATION (Fig. 1&Fig.3)

12. Align canopy (H) onto mounting plate (A) and secure with screws (C).
13. Install (6) six candelabra base bulbs (Q) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. —**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
14. Hang decorative glass balls (I) to metal ring (T). Hang decorative glass balls (M) to socket cups (V). Hang decorative glass balls (N) to rod (U) as shown (Fig.3).

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1

Set# A-021-203115

- Mounting plate
- Ground screw
- Mounting screw*2


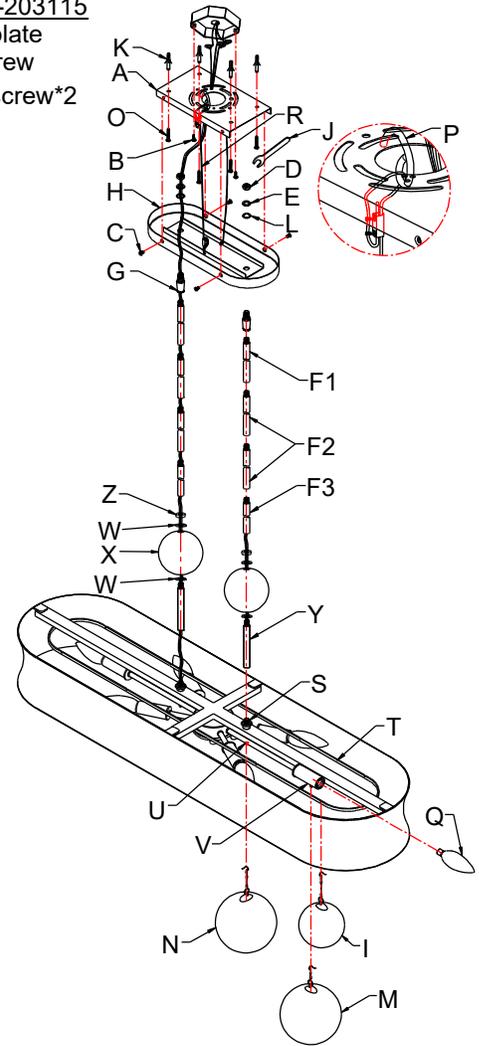


Fig. 2

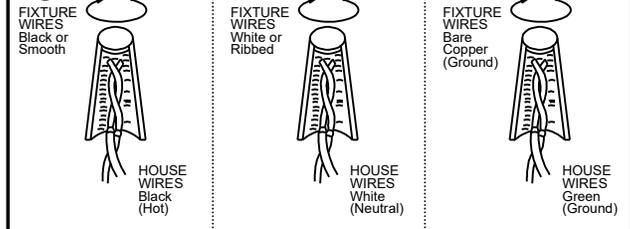

INSTALLATION INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

Fig. 3

