
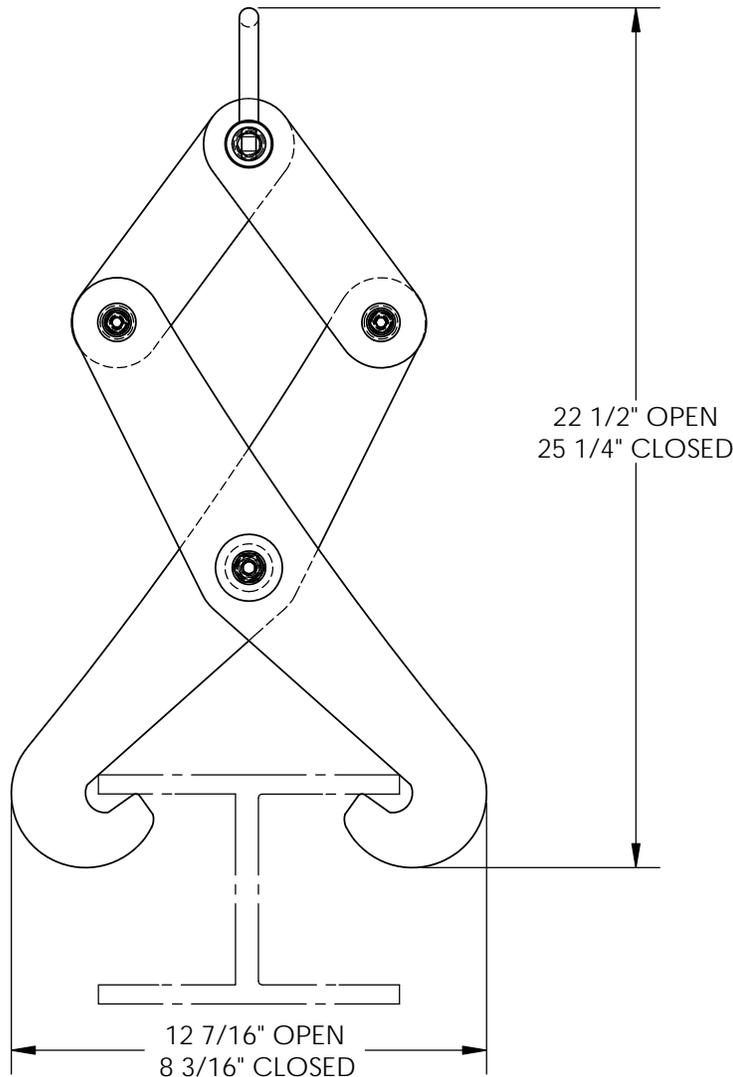


BEAM TONG - BT-40

APPROX WEIGHT: 18.10 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE

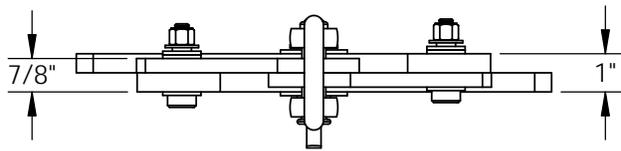

| | |
|-----------------------|--|
| FOR INTERNAL USE ONLY | |
| PROJECT SIGN OFF | |
| SALES | |
| ENG. | |
| FAB. | |
| POWER | |

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

DIMENSION TOLERANCE $\pm 1/4"$

STANDARD FEATURES

- MODEL NUMBER IS: BT-40
- CAPACITY IS: 4,000 LBS.
- OVERALL OPEN WIDTH IS: 12 7/16"
- OVERALL CLOSED WIDTH IS: 8 3/16"
- OVERALL OPEN HEIGHT IS: 22 1/2"
- OVERALL CLOSED HEIGHT IS: 25 1/4"
- MAX. BEAM WIDTH IS: 8"
- INCLUDES 2 TON CLEVIS
- POWDERCOATED SAFETY YELLOW
- MANUFACTURED TO ASME B30.20 STANDARDS

SPECIAL FEATURES

NONE

| | | |
|--|--|-------------|
| APPROVAL | I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. | |
| | ALL SPECIAL UNITS ARE NON-RETURNABLE [] As drawn [] As marked | |
| Signed: _____ | | Date: _____ |
| LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING | | |

| | | |
|-----------------------------|------------|------------|
| DISTRIBUTOR'S NAME: | | P.O.# |
| VESTIL MANUFACTURING | | X |
| | | W.O.# |
| DRAWN BY: TJM | | X |
| DATE: 8/25/2009 | | SALES: X |
| REFERENCE: X | SCALE: 1:5 | FILE NAME: |
| QUOTED LEAD TIME: X | QUOTE # X | 49-007-002 |