





CATHEDRAL MEDIUM LARGE & X-LARGE PENDANTS

SLPD315; SLPD316; SLPD317

General Product Information




WARRANTY



FCC STATEMENT

Tools Required



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



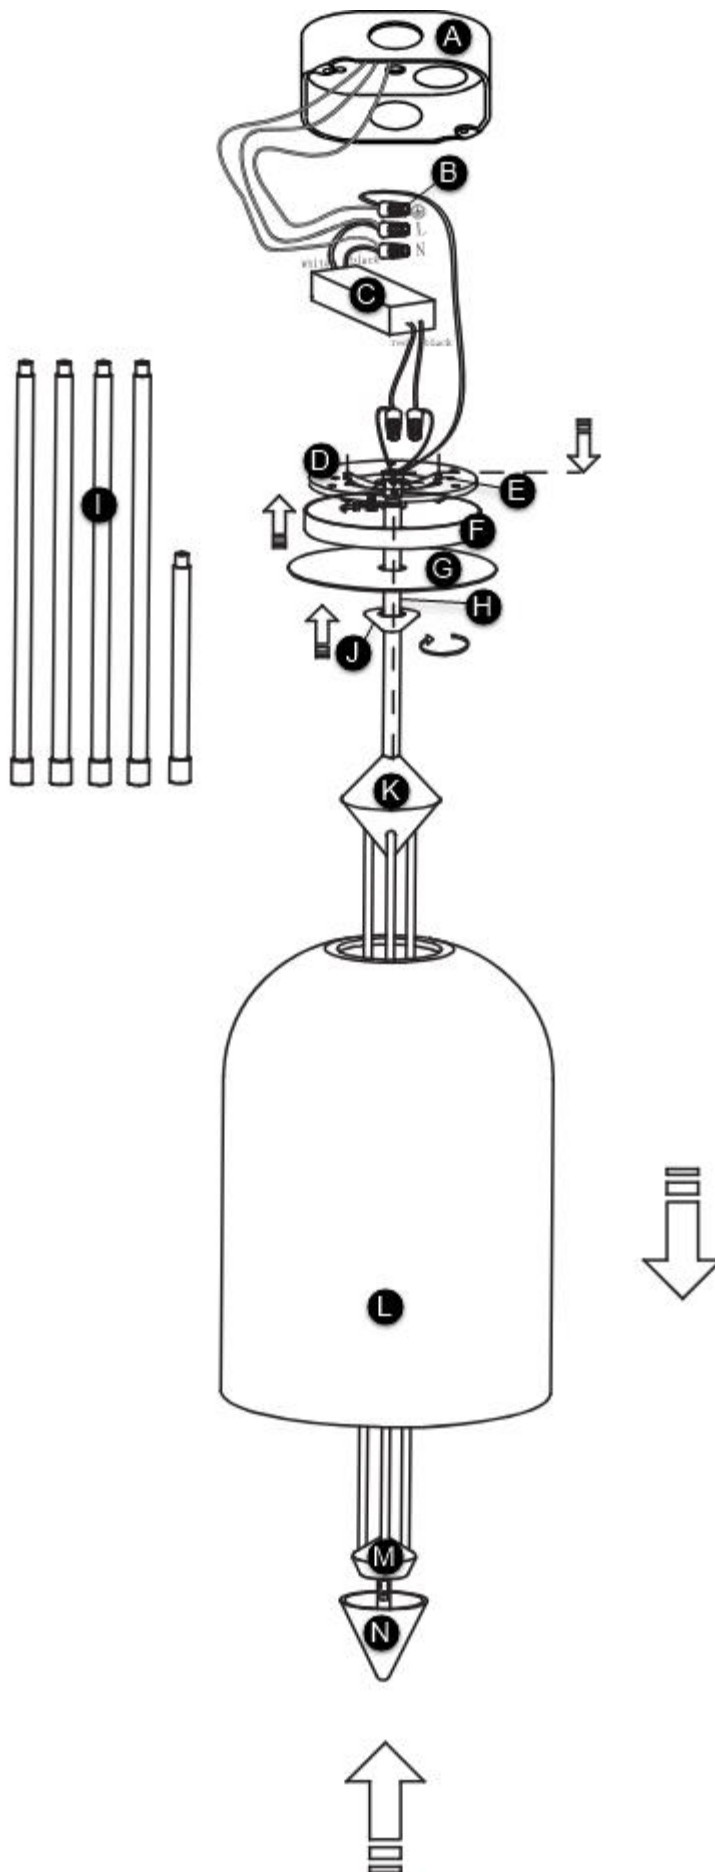

FIXTURE PARTS

- A. Junction box
- B. Wire Nuts
- C. Driver
- D. Mounting Plate
- E. Mounting Screws
- F. Canopy
- G. Cover Plate
- H. Top Stem
- I. Stem Assembly
- J. Collar Nut
- K. Fixture (Diamond)
- L. Shade
- M. LED Module
- N. Cover

INSTRUCTIONS

I. Preparing the Fixture

1. Unscrew the collar nut from the screw collar on the mounting plate. Remove the mounting plate and driver from the canopy.
2. Secure the mounting plate to the junction box using the mounting screws.
3. Install the glass through the top stem and diamond portion of the fixture.
4. Feed the fixture wires through the top stem, collar nut, plate and canopy.
5. Determine the desired height using the provided stems and feed the fixture wires through the stems and assemble them by screwing them together.
6. Screw the entire stem to the top of the fixture.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Adjust the length the wires using a wire stripper/cutter, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Black/Blue driver wire to black/blue fixture wire
 - b) Red driver wire and red fixture wire
 - c) White driver wires and neutral power line wire
 - d) Black driver wires and hot power line wire
5. Carefully tuck the driver and all the wires into the junction box.

III. Installing the Fixture

1. While supporting the fixture, lift and push the canopy into place against the mounting plate on the ceiling.
2. Screw the collar nut onto the screw collar to secure the fixture.
3. Install the shade onto the fixture.
4. Secure the LED module with the cover to finish.