

INSTALLATION INSTRUCTIONS

Rain Chain Assembly With Gutter Reducer (Adaptor)

GUTTER REDUCER

The pure copper gutter reducer is designed to fit in the rain gutter over the drain hole where there is a downspout.

The wide mouth captures most of the rain water and tapers down (inverted top hat shape) to direct the flow of water from the gutter into the rain chain.

Our pure copper gutter reducer © provides a seamless assembly between the rain chain and gutter.


INCLUDED;

A. Top hat shaped pure copper gutter reducer


B. Brass Bolt with groove in middle to hang rain chain with threaded ends on both sides

C. 2 pcs of Brass Dome Nuts


Step 1: Unscrew the 2 brass nuts from the bolt (Figure 1)

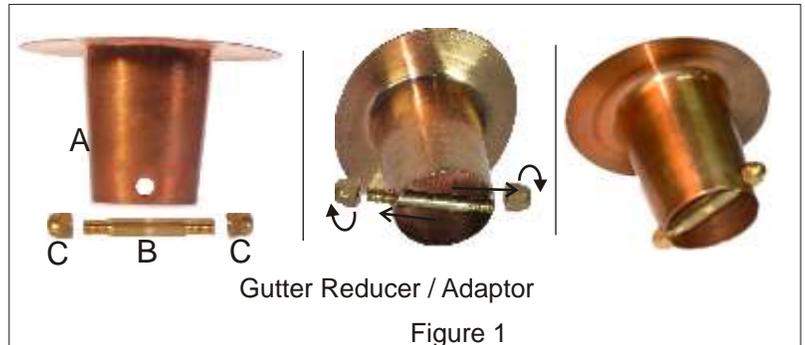

Step 2: Take your Rainchain, unhook **Cross Bar** or **Triangular Hanger** from top link with slightly bending by hand or with help of pliers. Cross Bar or Triangular Hanger is not required when installing with a Gutter Reducer (Figure 2)

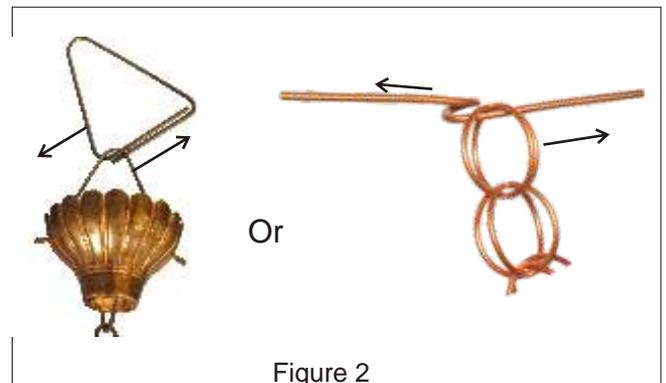

Step 3: Slide in the brass bolt (B) inside the hole from the inside circle of the gutter reducer(A) and push it out, place the first link (top link) of rainchain in brass bolt, then slide the other end through the 2nd hole and tighten both nuts(C) at the open ends to make the installation secure (Figure 3)

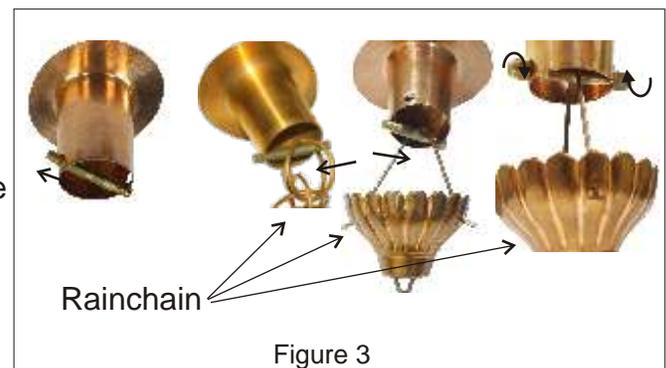

Step 4: Securely hang your rain chain from the center groove of the bolt (Figure 4)

Installation Complete

