


Brondell®

Swash 1000 Luxury Bidet Toilet Seat with Remote Control


Models: S1000-EW, S1000-EB, S1000-RW, S1000-RB

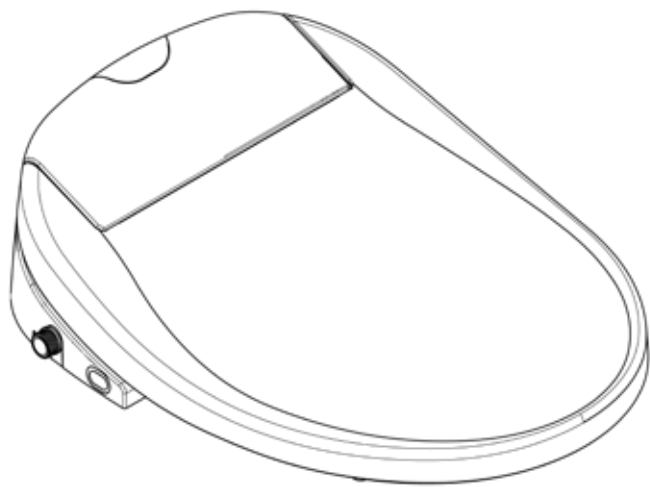

Features

- Adjustable, 5-position stainless steel nozzles
- Nozzle oscillation wash mode
- Fully adjustable water pressure and temperature
- Four-level heated seat and 4-level warm air dryer with temperature control
- Ceramic water heater system
- Built-in carbon deodorizer
- Gentle-close seat and lid
- Wireless remote control with mount
- On-demand, self-cleaning nozzles
- Aerated wash spray
- 3-year limited warranty provided by US-based customer service team

Technical Specifications	
Power Voltage / Frequency	120 V / 60 Hz
Max Power Consumption	1200 W
Power Cord Length	42" / 106.7 cm
Rated Power Source	120 V
Remote Control Battery Type / Quantity	AAA Alkaline / 3 units
Seat Weight Limit	330 lb / 150 kg
Lid Weight Limit	270 lb / 122.47 kg
Deodorizer Filter Type	Activated Carbon



NOTE: The specifications listed above are subject to change without prior notice for reasons of improving the product performance.

Brondell®
Feels better already.
Brondell, Inc.
PO Box 470085
San Francisco, CA 94147
brondell.com

Brondell®


Weight and Dimensions	
Dimensions (L x W x H)	Elongated: 20.8" x 16.2" x 5.7" / 52.83 cm x 41.15 cm x 14.48 cm Round: 19.4" x 16.2" x 5.7" / 49.28 cm x 41.15 cm x 14.48 cm
Bidet Hose Length	18" / 45.72 cm
Bidet Hose Connection Size	½" x ½"
T-Valve Connection Size	⅞" x ⅞" x ½"
Weight	Elongated: 14.3 lb / 6.49 kg Round: 13.2 lb / 6 kg

Warm Water Washing Device	
Supply Water Pressure	14.5 psi–100.07 psi / 0.1 MPa–0.69 MPa
Incoming Water Temperature	32°F –104°F / 0°C–40°C
Flow Rate	Rear Wash: Max 0.13 gal/min / 0.5 L/min Front Wash: Max 0.13 gal/min / 0.5 L/min
Default Cycle Time	2 minutes
Water Pressure Control	3 levels
Water Temperature Control	4 levels: OFF - Room Temp; Low - 88.7°F / 31.5°C; Medium - 94.1°F / 34.5°C; High - 99.5°F / 37.5°C
Max Heater Power Consumption	1200 W
Safety Devices	Temperature Sensor, Temperature Fuse, Micro Switch, Bimetal

Heated Seat and Air Dryer	
Seat Temperature Control	4 levels: OFF - Room Temp; Low - 87.8°F / 31°C; Medium - 93.2°F / 34°C; 98.6°F / 37°C
Number of Dryer Settings	4 levels
Max Seat Heater Power Consumption	60 W
Default Dryer Cycle Time	2 minutes
Safety Devices	Temperature Fuse, Bimetal

Get the right fit.

- A. Center of bolt holes to front of toilet bowl
Elongated: 18"-19.5" / 45.72 cm-49.53 cm
Round: 16"-17.75" / 40.64 cm-45.09 cm
- B. Distance from center of bolt holes to toilet seat tank
All models: Minimum 1.5" / 3.81 cm
If the distance from the center of the bolt holes to the toilet tank is less than 1.5 inches, the Swash may extend slightly over the front edge of your toilet bowl.
If the distance from the center of the bolt holes to the toilet tank is less than 2 inches, the Swash may extend slightly over the front edge of your toilet bowl.
- C. Distance between bolt holes
All models: 5.25"-8" / 13.3 cm-20.32 cm
- D. Measure the distance from the front of the toilet tank to the front of the toilet bowl.
If this measurement is less than 20 inches, the seat will extend over the front edge of the toilet.
Consider purchasing a Round size to reduce the amount the seat extends over the front edge.

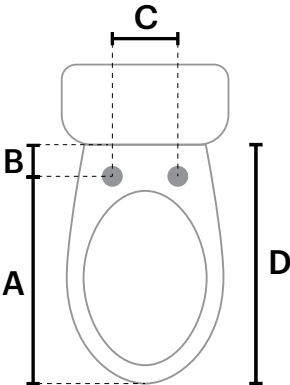

NOTE: The specifications listed above are subject to change without prior notice for reasons of improving the product performance.