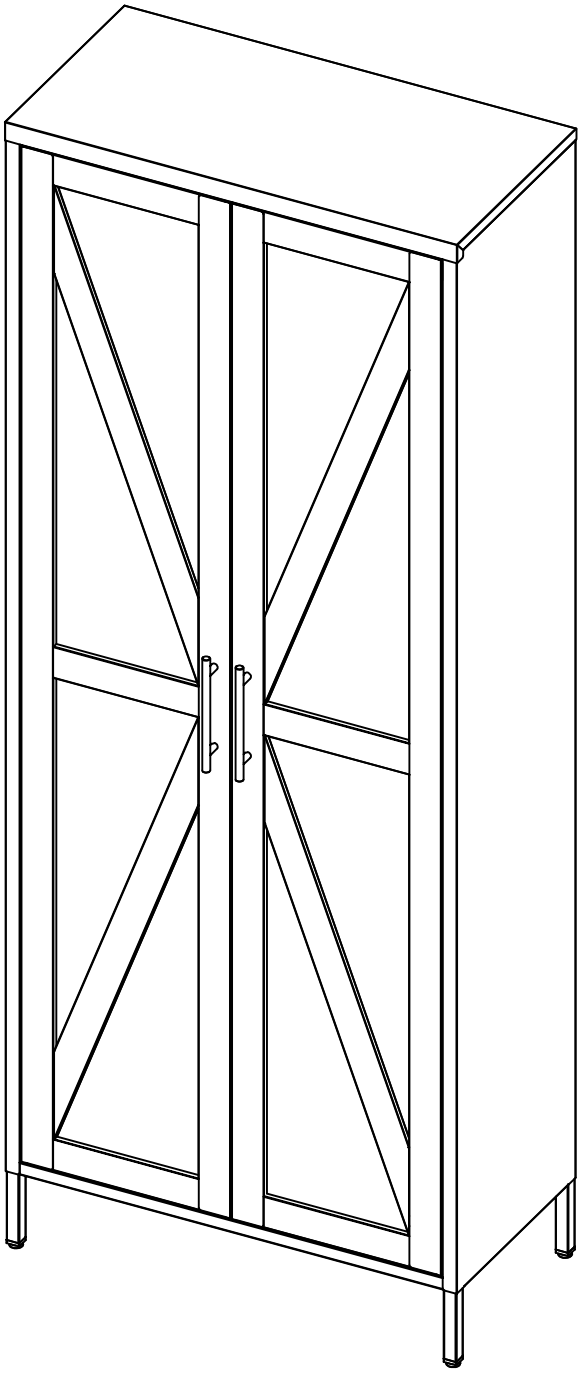












Accessories

Name		Picture	Qty	Name		Picture	Qty
A	Side panel		2	K	Right slide rail bracket		1
B	Kick plate		2	L	Drawer panel		1
C	Left back panel		1	M	Drawer bucket		1
D	Right back panel		1	N	Magnet		4
E	Top panel		1	O	The doorknob		2
F	Shelf		3	P	1-3/16 Wall screw		2
G	Floor		1	Q	Wall anchor		2
H	Right door		1	R	13/32 Screw		28
I	Left door		1	S	Shelf clasp		8
J	Left slide rail bracket		1	T	Door pivot		2

Accessories

Name		Picture	Qty	Name		Picture	Qty
U	Shim		4	W-1	Left slide rail		1
				W-2	Right slide rail		1
V	M4*22 screw		4				

CAUTION


An assistant is required.

If there is any question with the assembly, please just contact the customer service team to ask for help!

Step 1

Insert side panels A into kick plates B and fix them with screws R

R × 4

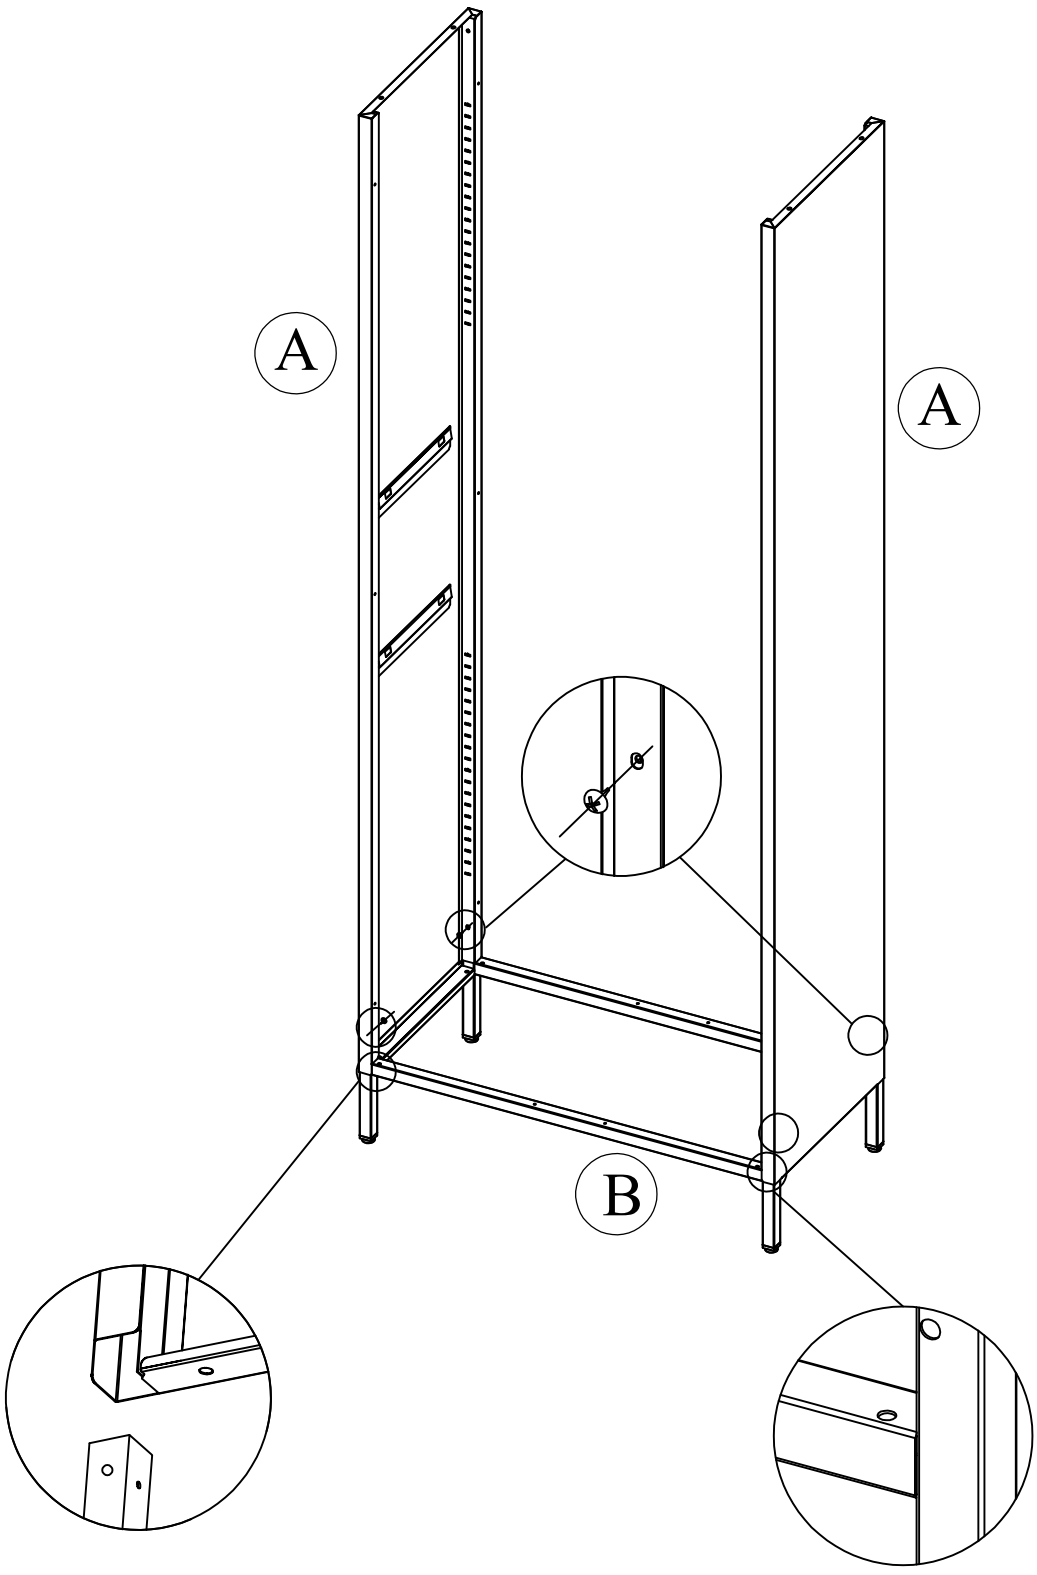


The door shaft hole is on the outside

Step 2

Connect left back panel C with side panel A and kick plate B on the left by screws R


Ⓡ × 4

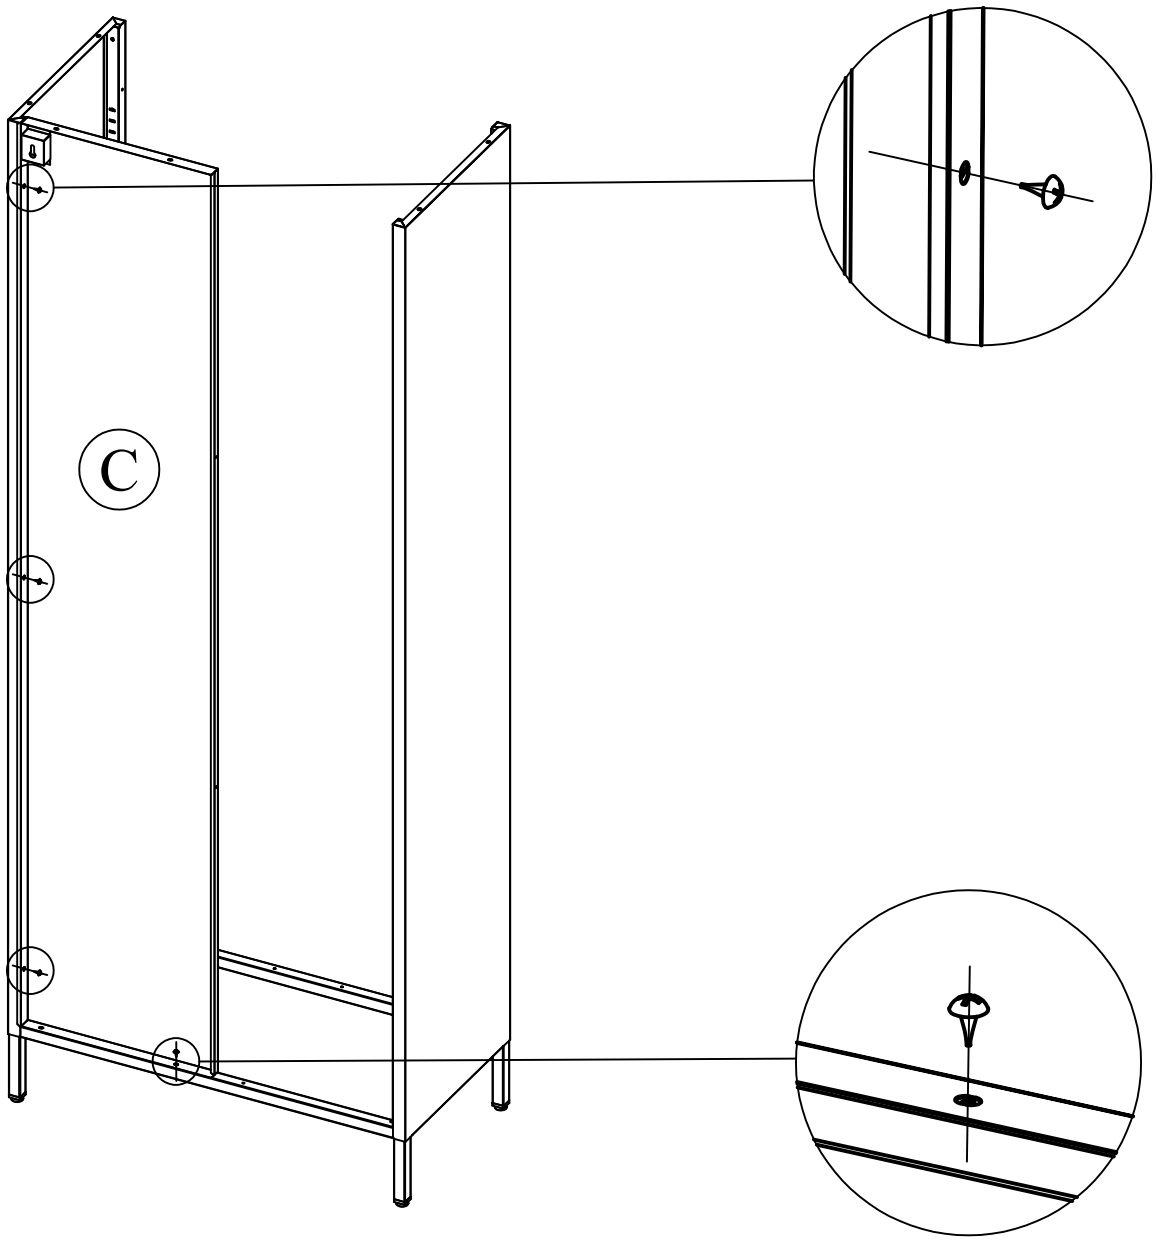

Step 3

Connect right back panel D with side panel A and kick plate B on the left by screws R, then connect two back panels with screws R


R × 6

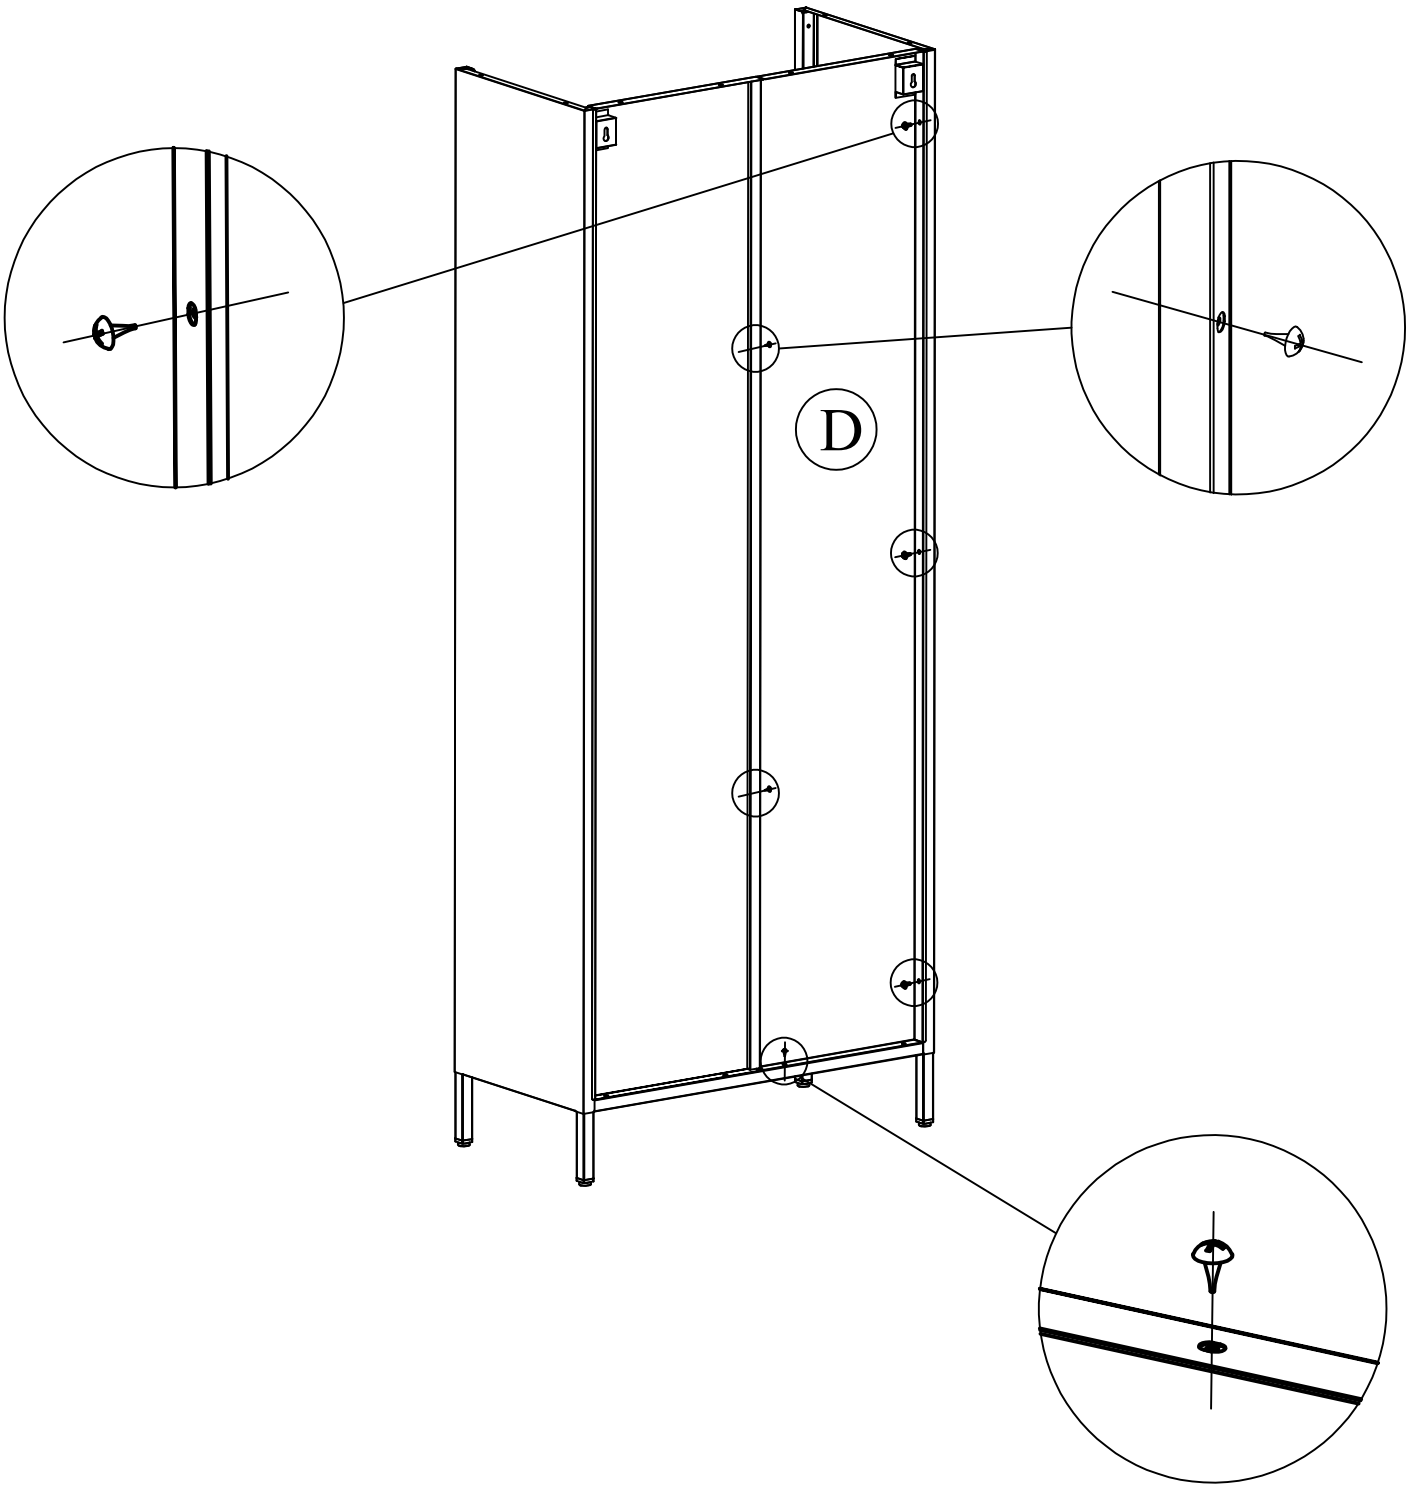

Step 4


Connect top panel E with back panels and side panels by screws R

R × 8

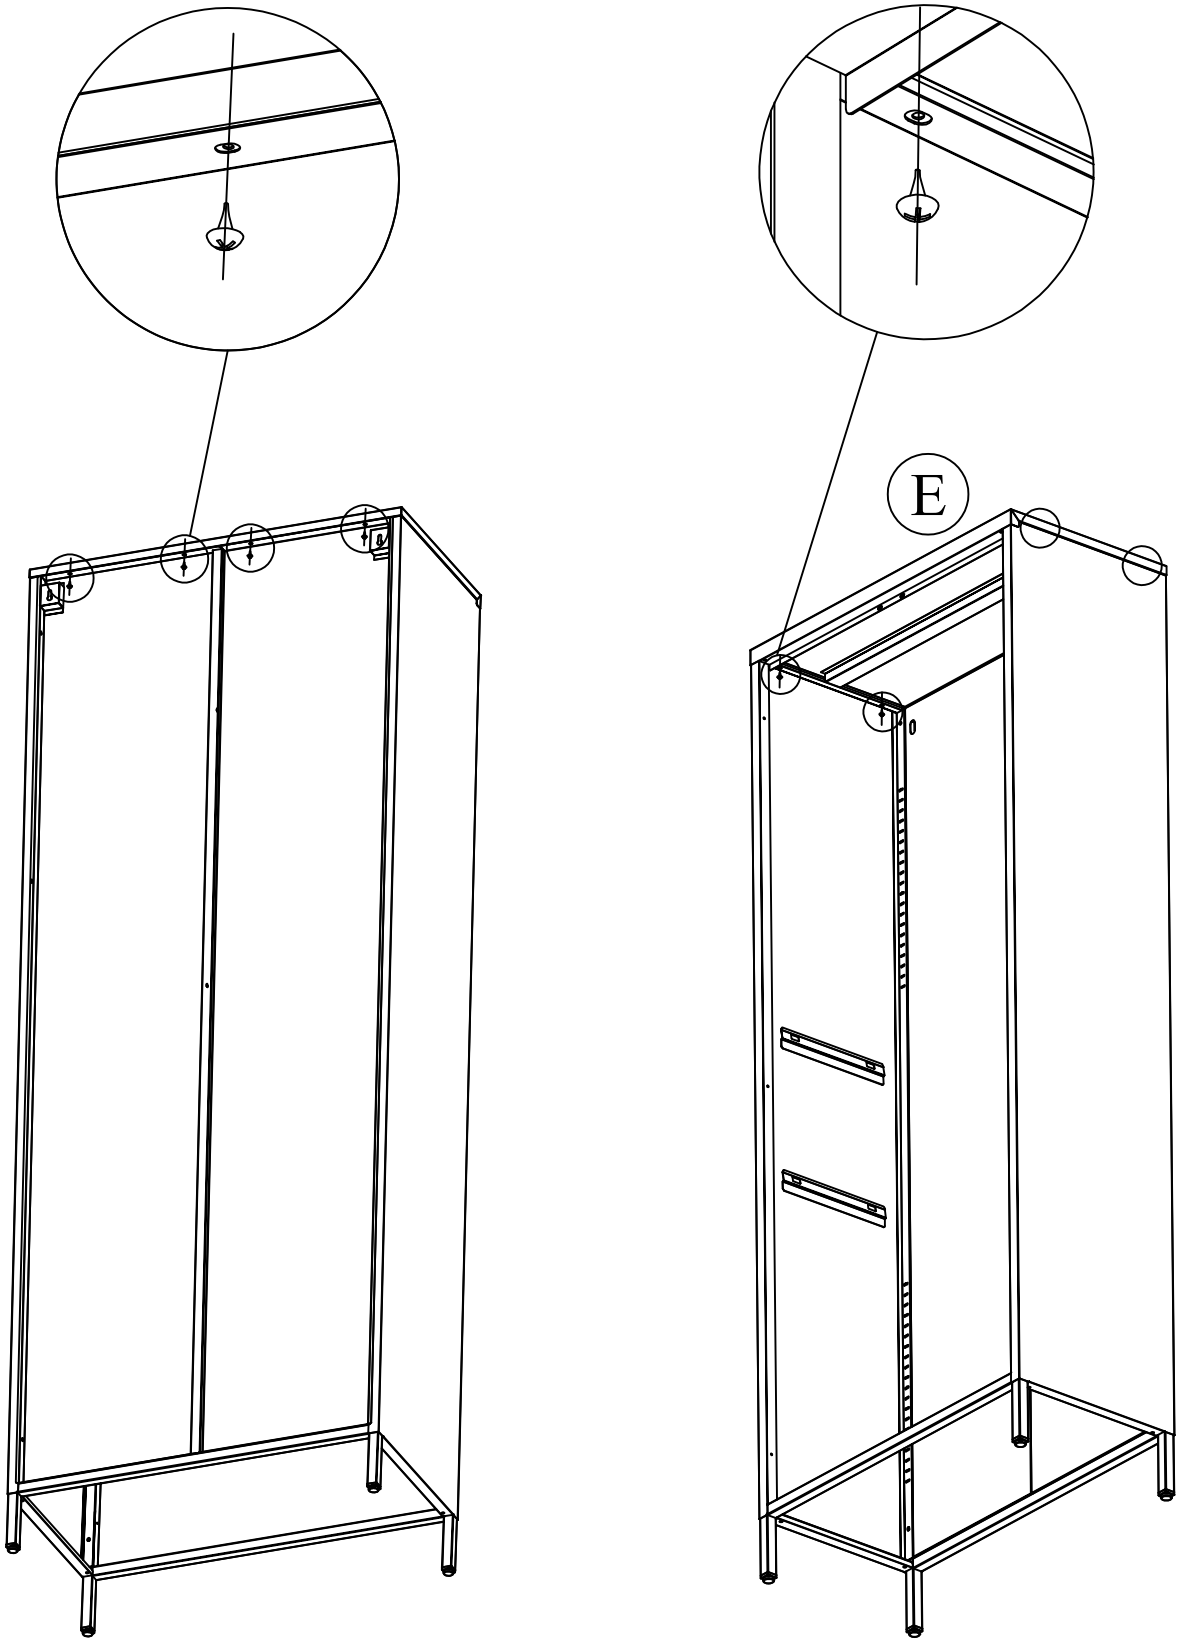

Step 5

Insert left slide rail bracket J and right slide rail bracket K into the side panels, then install the left slide rail W-1 and right slide rail W-2 on the brackets

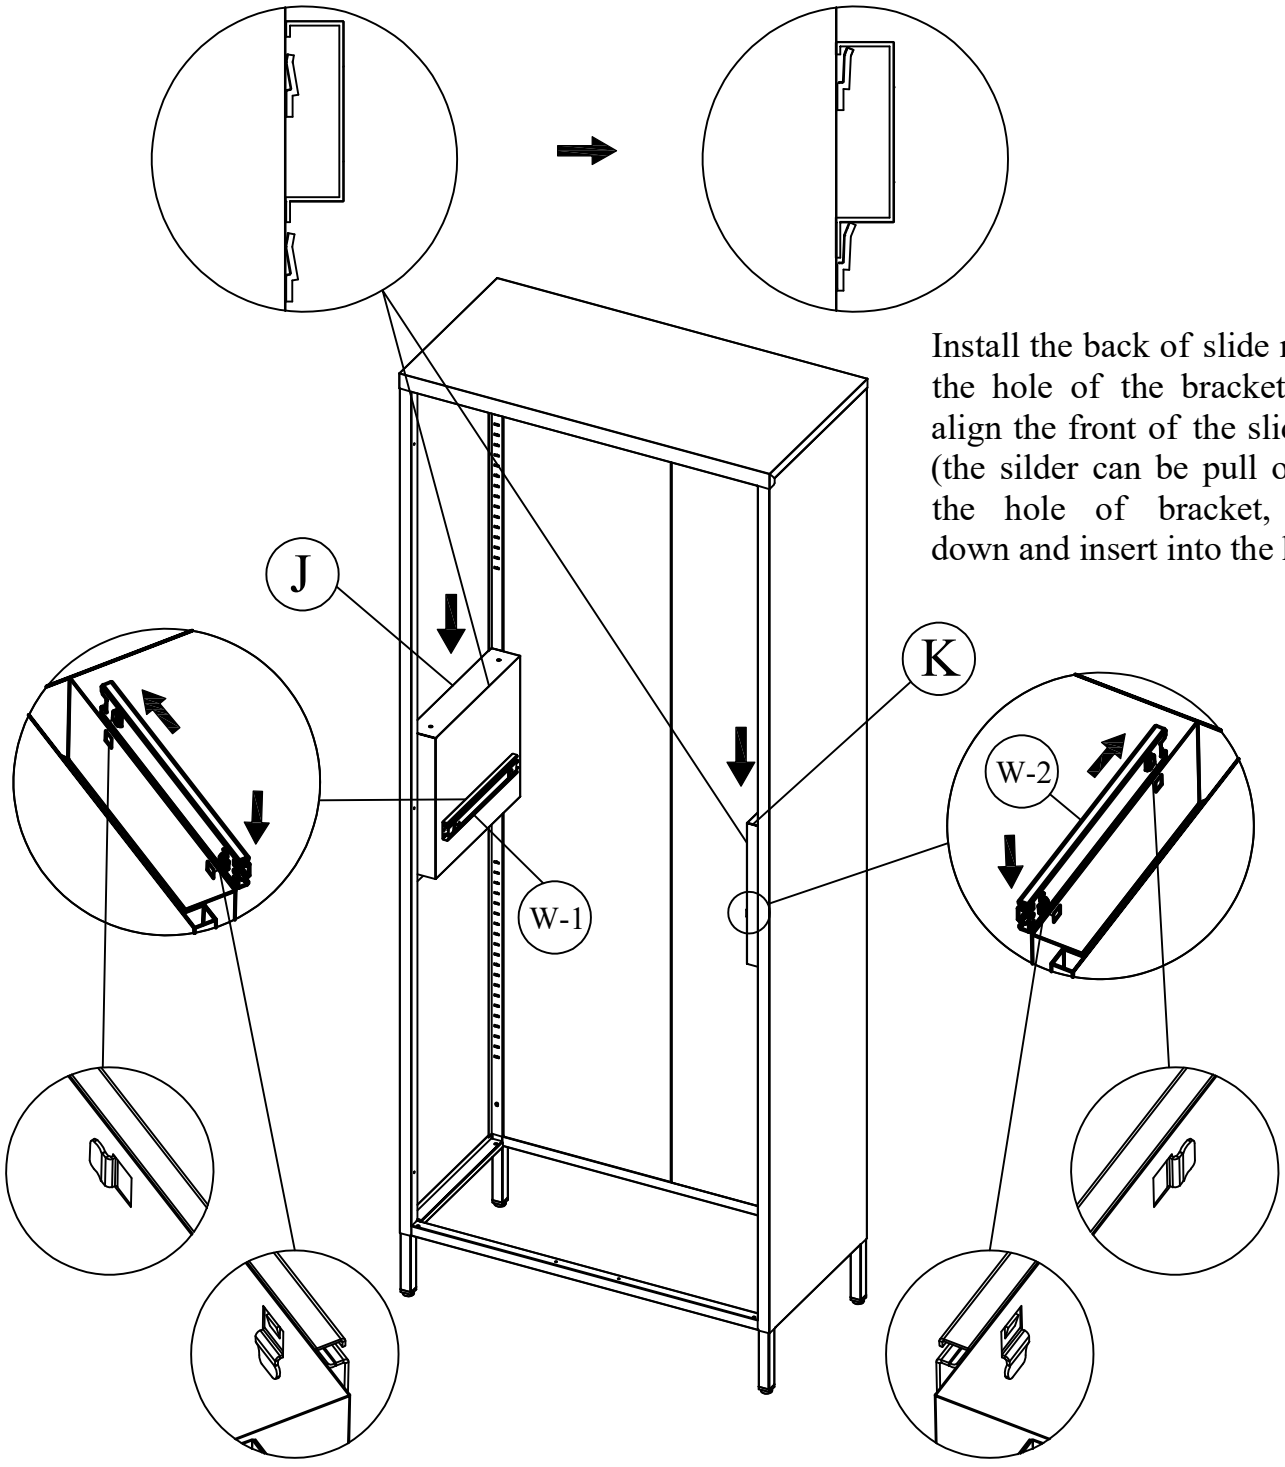



Install the back of slide rail on the hole of the bracket, then align the front of the slide rail (the silder can be pull out) to the hole of bracket, press down and insert into the hole.

Step 6

Unfold drawer bucket M and fold the small parts towards the middle, then install drawer panel L with 6 screws R




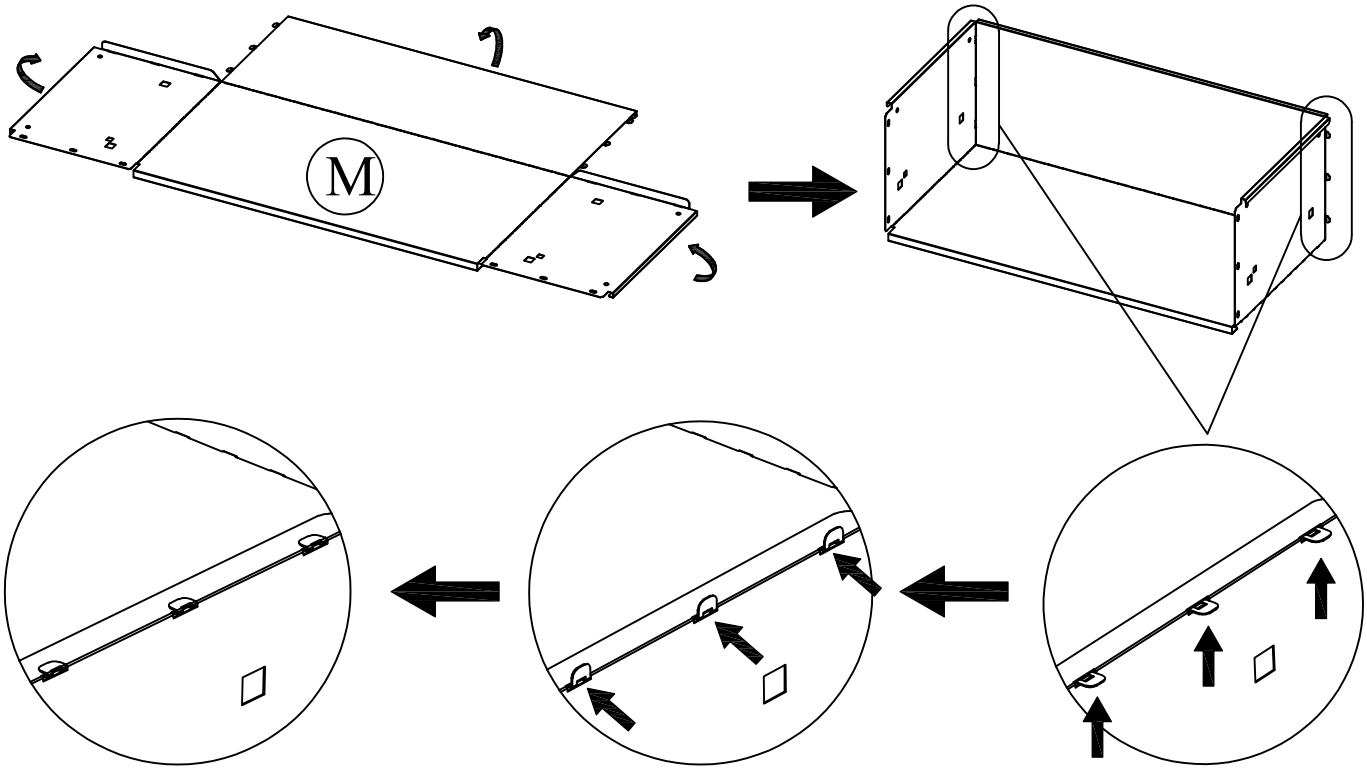

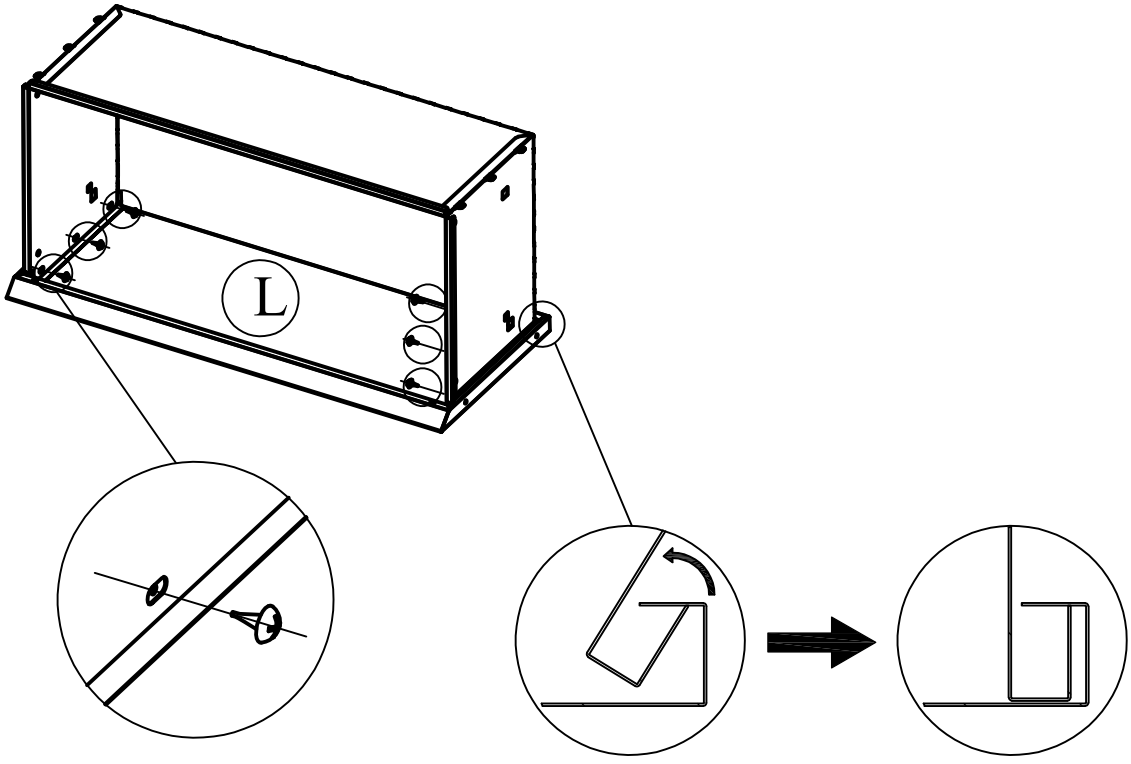

Step 7

Install the assembled drawer in the cabinet

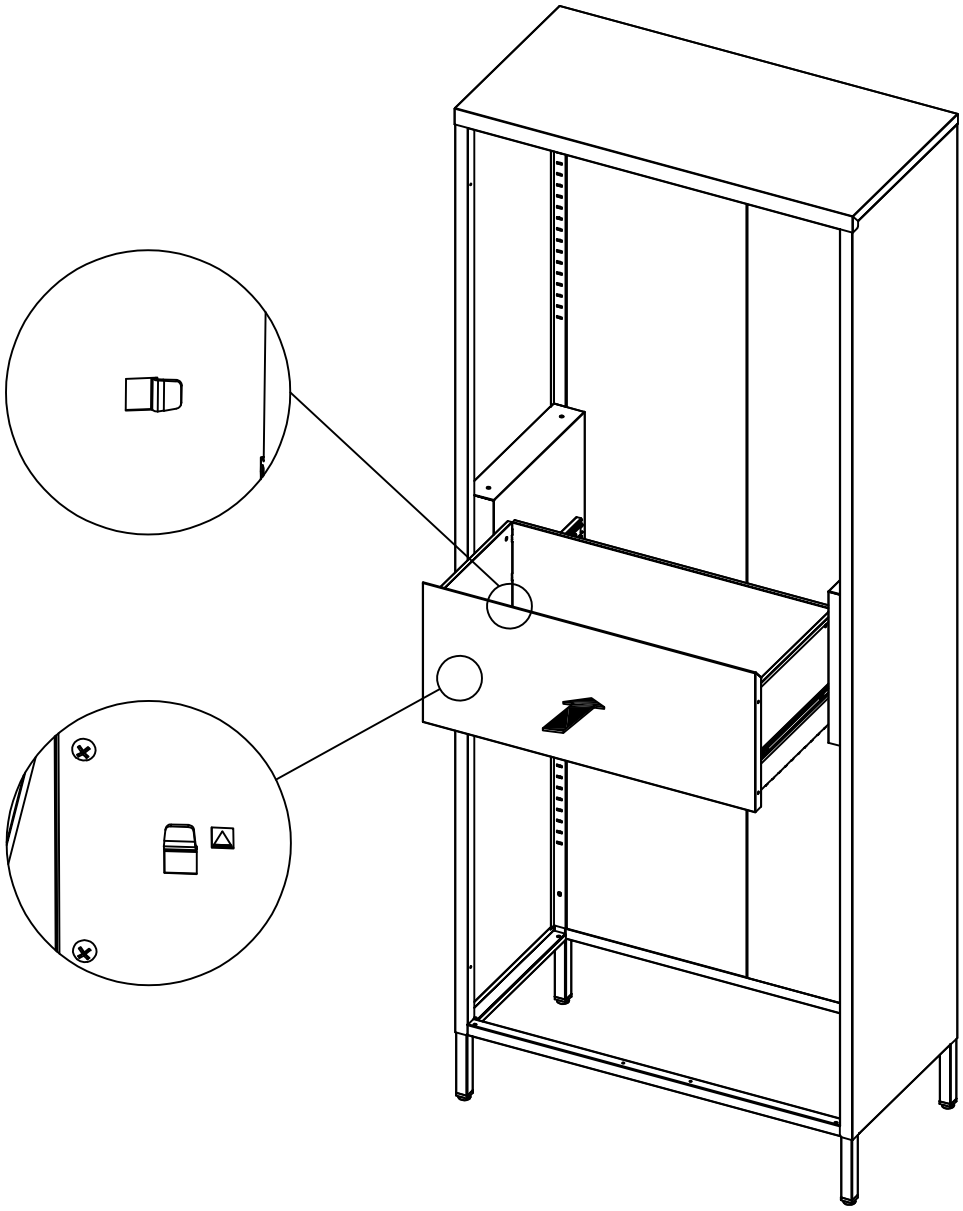


First, completely pull out the slide rails of the left and right side panels, and place the drawer above the inner side of the slide rails. Make sure that the hanging holes in the front on both sides of the drawer are aligned with the hooks of the slide rails, connect them first, then press down the end holes to make the hooks fully enter the hanging holes.

Step 8

Hang the shelf clasps S and install shelves F and floor G, then install magnets N on the top and bottom

S × 8

N × 4

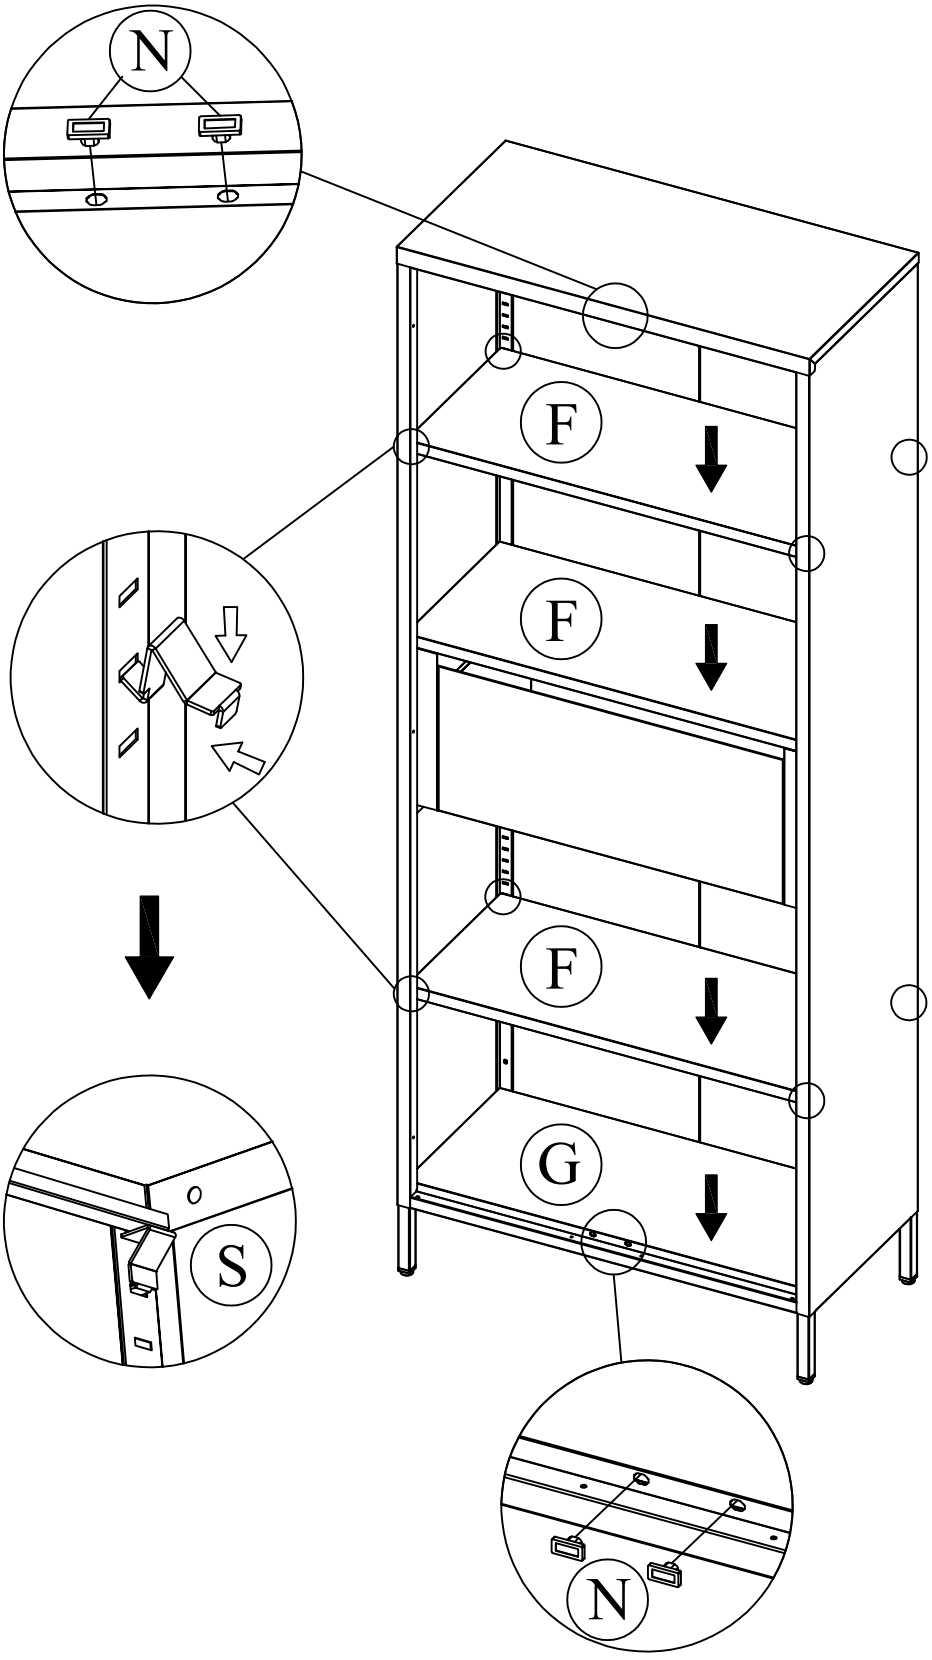

Step 9


Install the left door I and right door H on the cabinet as shown below and secure the handle O to the door with Screws V

T × 2

U × 2

V × 4

O × 2

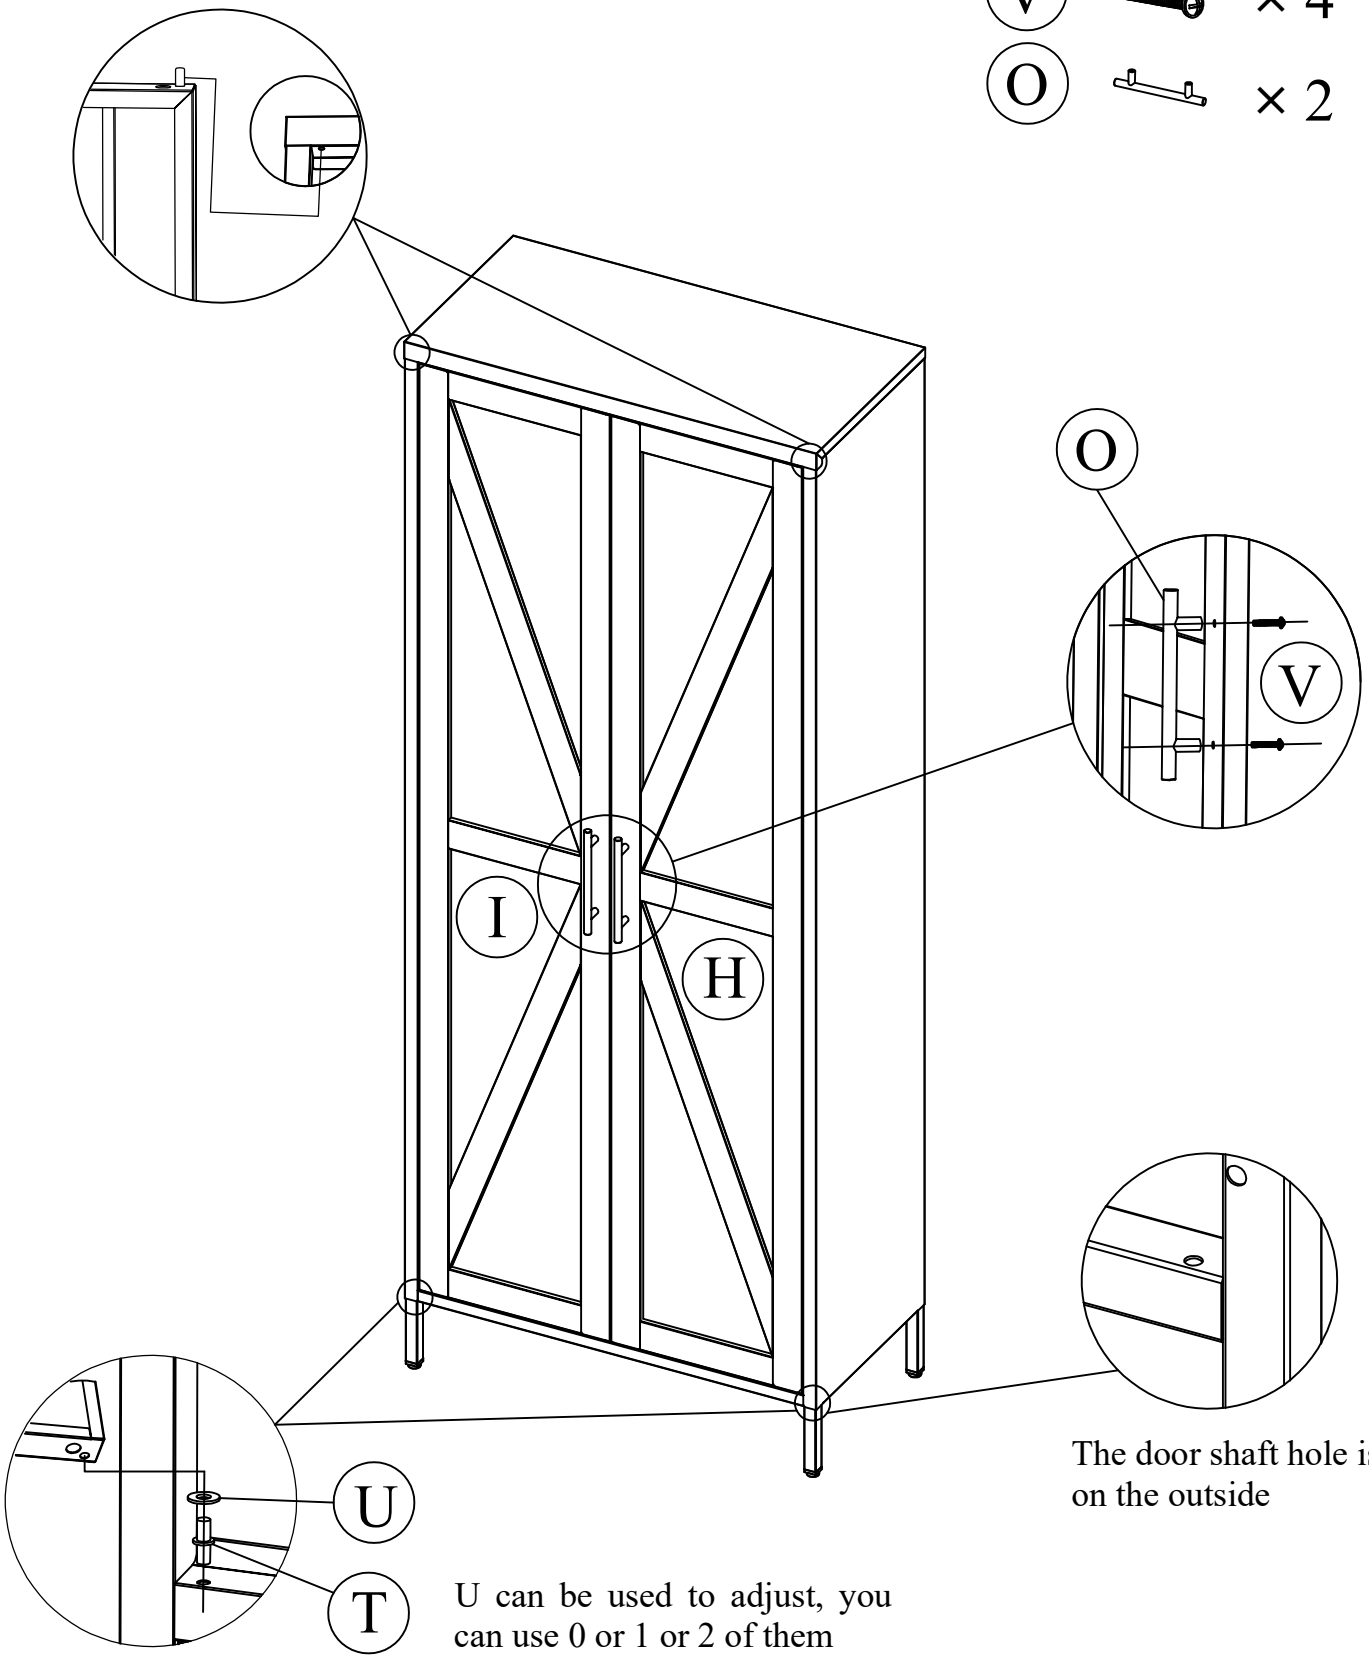

The door shaft hole is on the outside


U can be used to adjust, you can use 0 or 1 or 2 of them

Step 10

Fix the cabinet to the wall with 2 screws P and 2 screws Q

P × 2

Q × 2

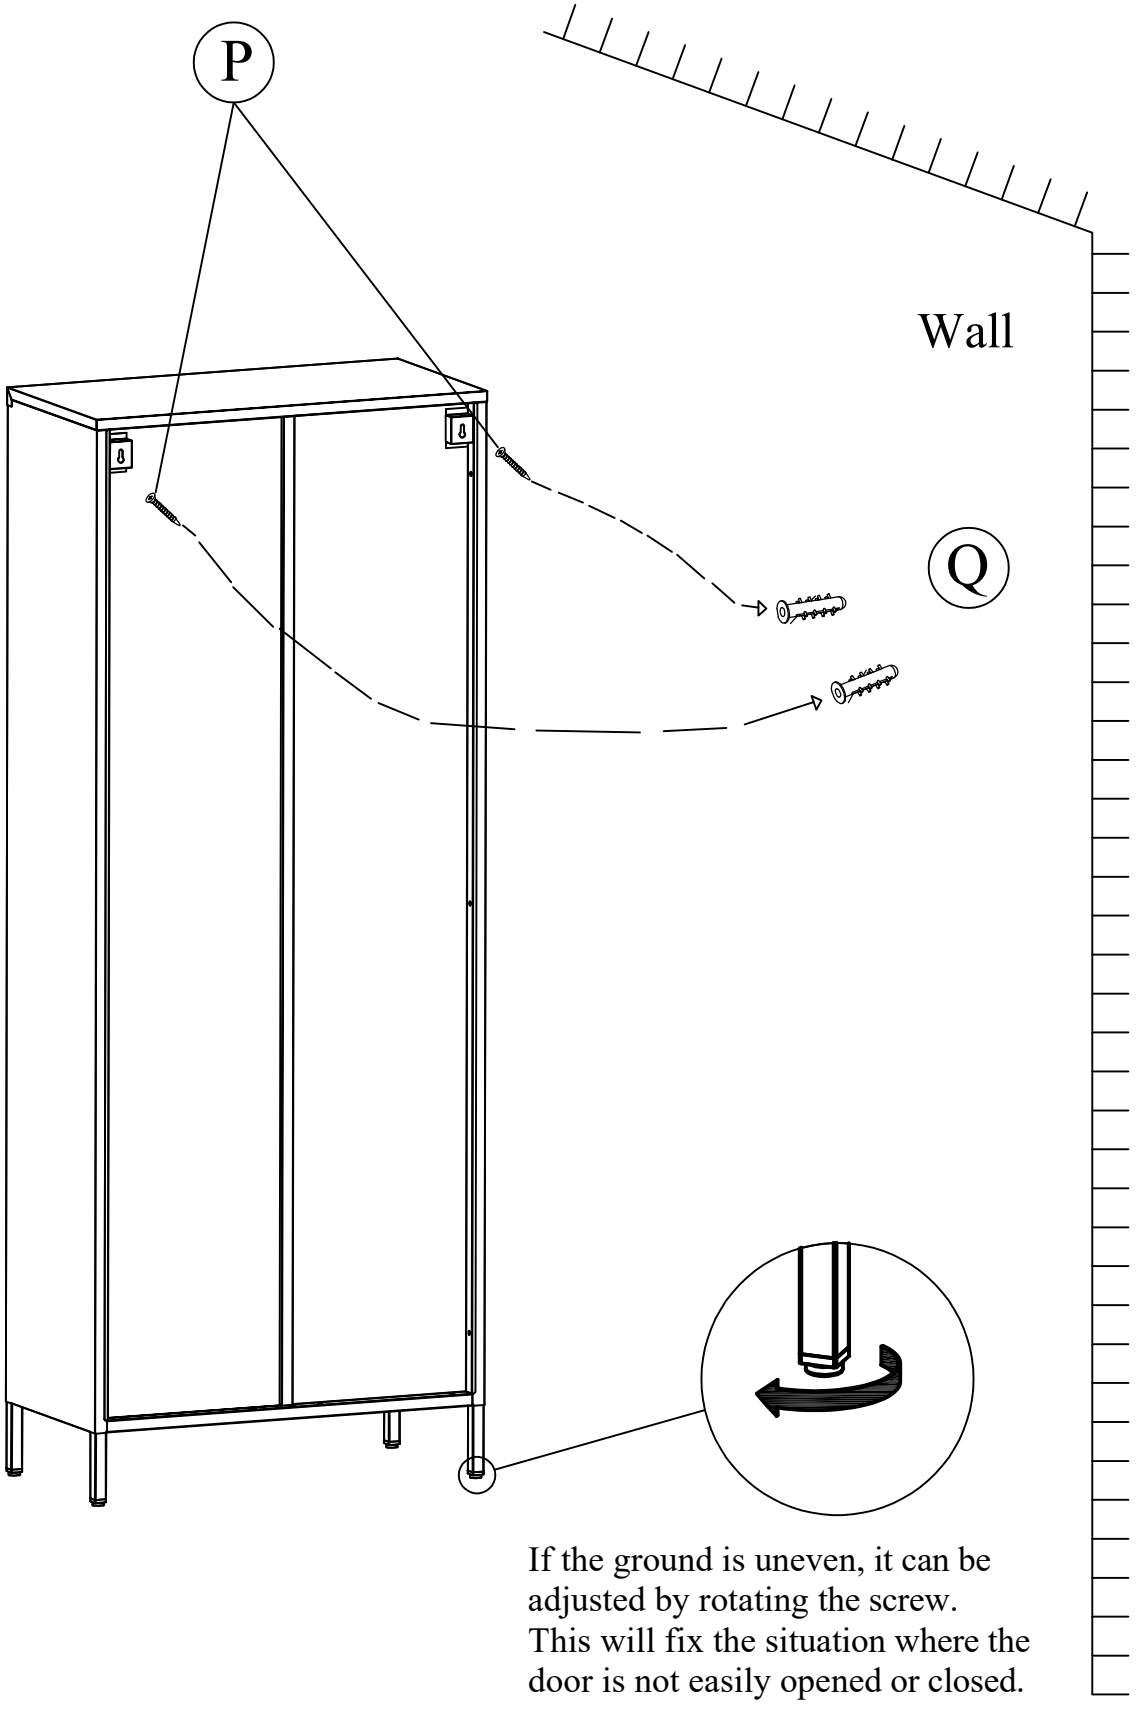

If the ground is uneven, it can be adjusted by rotating the screw. This will fix the situation where the door is not easily opened or closed.