


CEILING FAN WITH LIGHT



INSTALLATION MANUAL

TOOLS REQUIRED

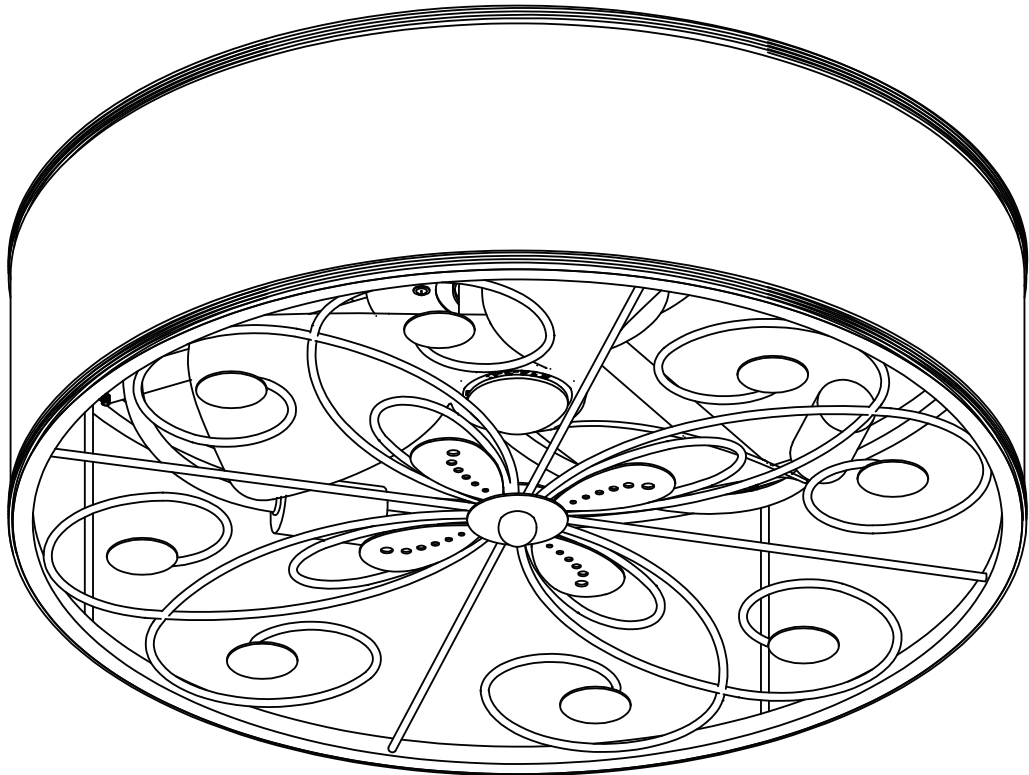


Ladder



Pliers




Wire Strippers




Screwdrivers

01

PACKING LIST

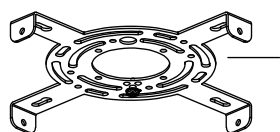

AA Mounting Bracket × 1

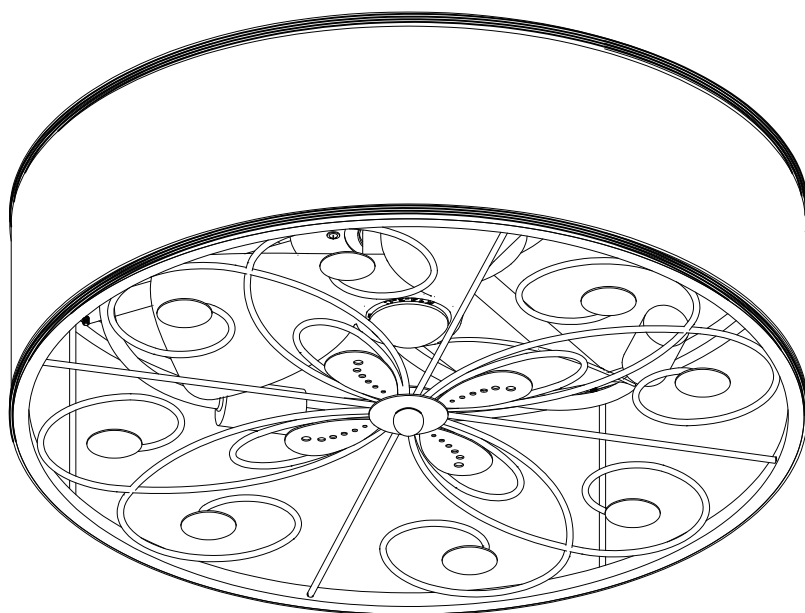

A Fan Assembly × 1

02

INSTALLATION KIT

AA

1×



Mounting Bracket

BB

1×



Ground Screw

CC

3×



Wire Nut

DD

2×



Self-Drilling Anchor

EE

1×



Gloves

FF

2×



Outlet Box Screw

GG


1×



"S" Hook

HH


1×



Remote Control

II

1×



Remote Holder

JJ

4×



Canopy Screw

NOTE:


1. Some extra hardware may be included. The quantity listed above is the number required for installation.
2. Some parts may be assembled together in the package.
3. BB is pre-installed on Mounting Bracket (AA). AA/JJ is pre-installed on Fan Assembly (A).

03

INSTALLATION


1. Separating the Mounting Bracket

Step 1: Loosen the Canopy Screw (JJ) from the Fan Assembly (A), and take out the Mounting Bracket (AA).

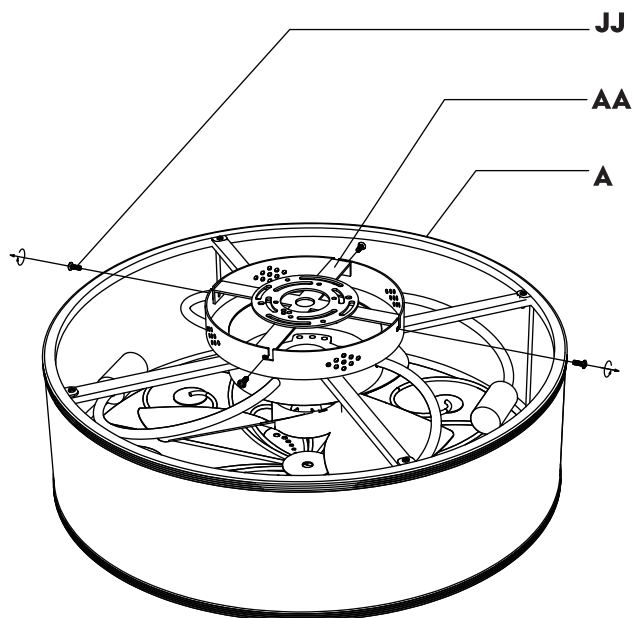


2. Installing the Mounting Bracket

Take off the screws from the outlet box, and secure the Mounting Bracket (AA) onto the box with the screws taken off or Outlet Box Screw (FF).

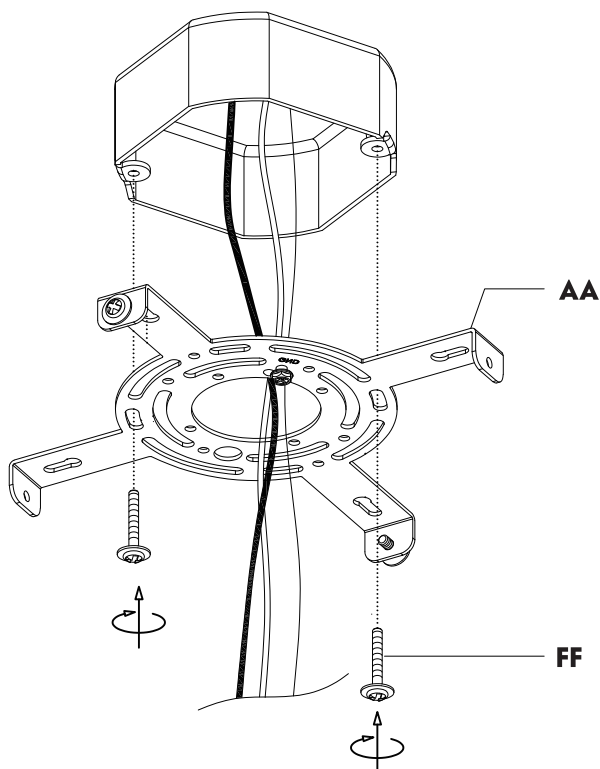


3. Installing the bulbs

Install the E12 bulb (not included) × 4, Max 40W each.

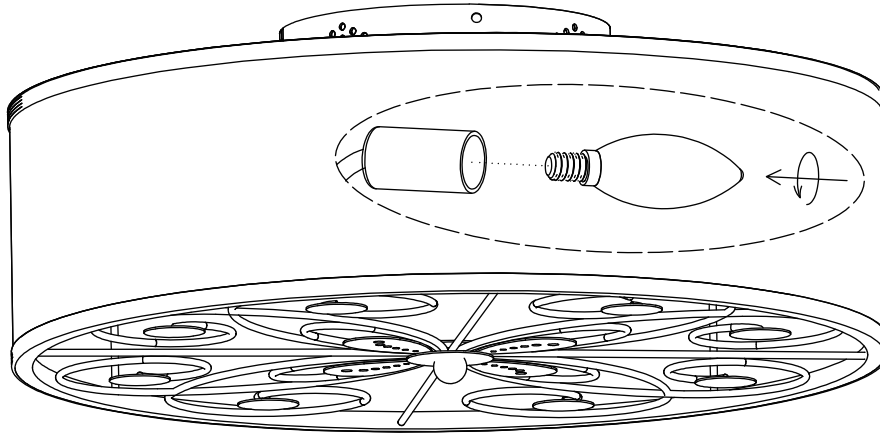

4. Hanging the Fan Assembly

Hang the Fan Assembly (A) on Mounting Bracket (AA) with the "S" Hook (GG).

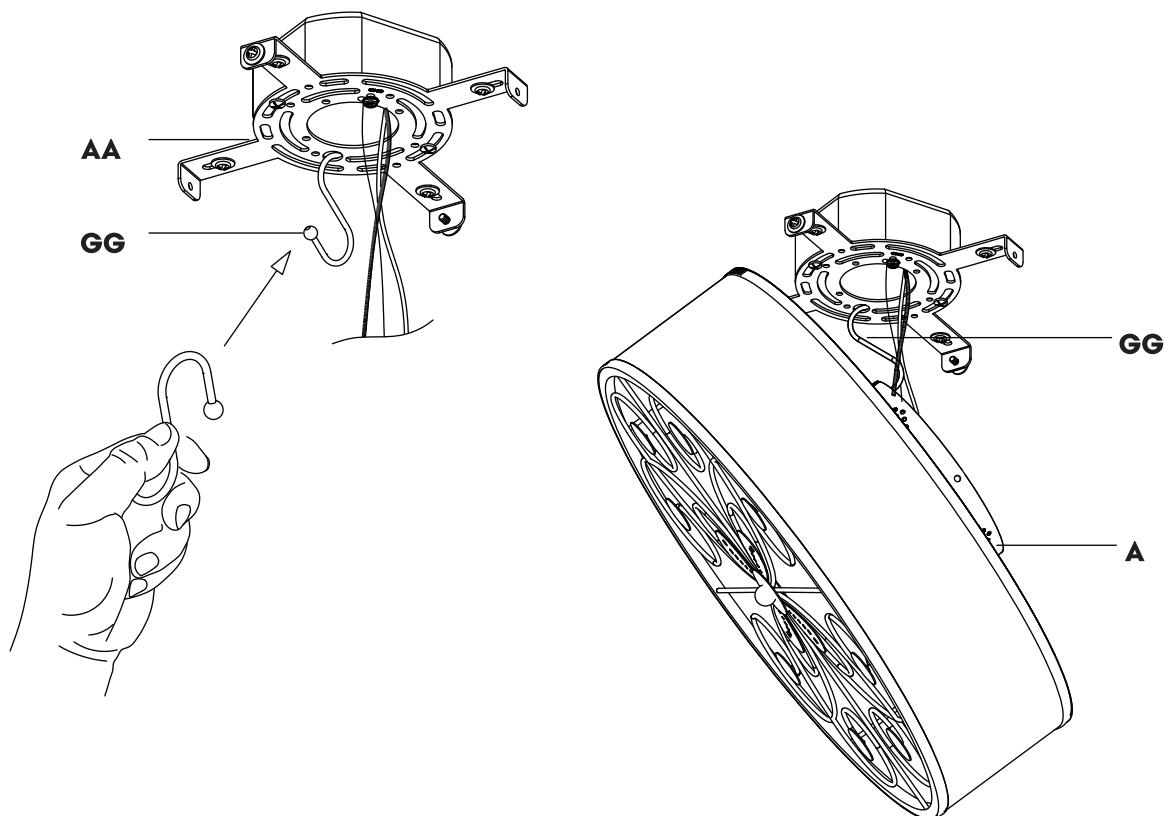


5. Wiring

Step 1: Wrap the ground wire from the outlet box around the Ground Screw on the Mounting Bracket (AA), and then connect the ground wire from the fixture to the ground wire from the outlet box.

Step 2: Connect the wires with the Wire Nut (CC) from the fixture to the house supply wires, neutral (white) to neutral wire, and hot (black) to hot wire.


Step 3: Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other.

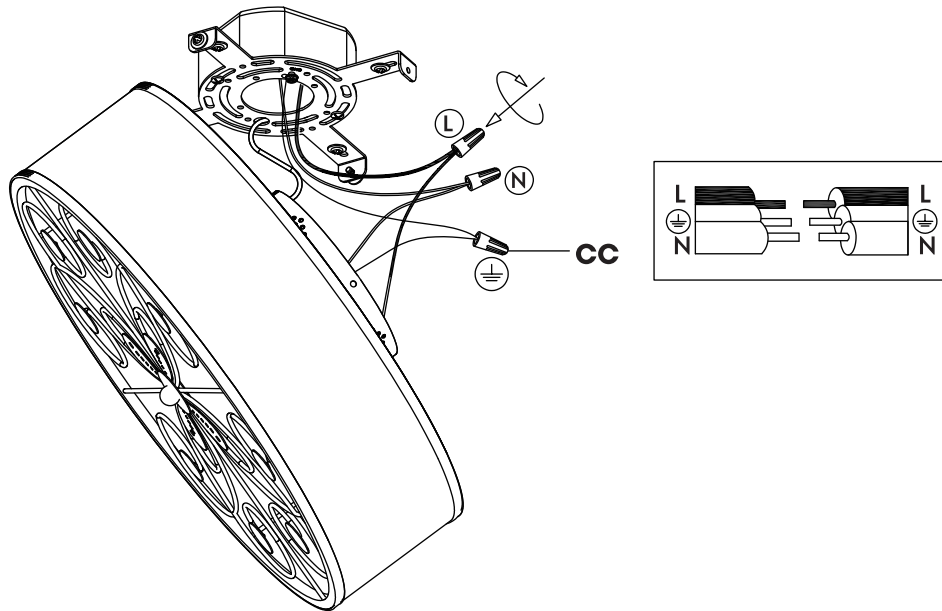

6. Attaching the Canopy

Step 1: Take away the "S" hook (DD).


Step 2: Align the "L" slots from the canopy to the Canopy Screws (JJ) on the Mounting Bracket (AA), rotate the canopy to lock it onto the Mounting Bracket (AA). Tighten the Canopy Screws (JJ).

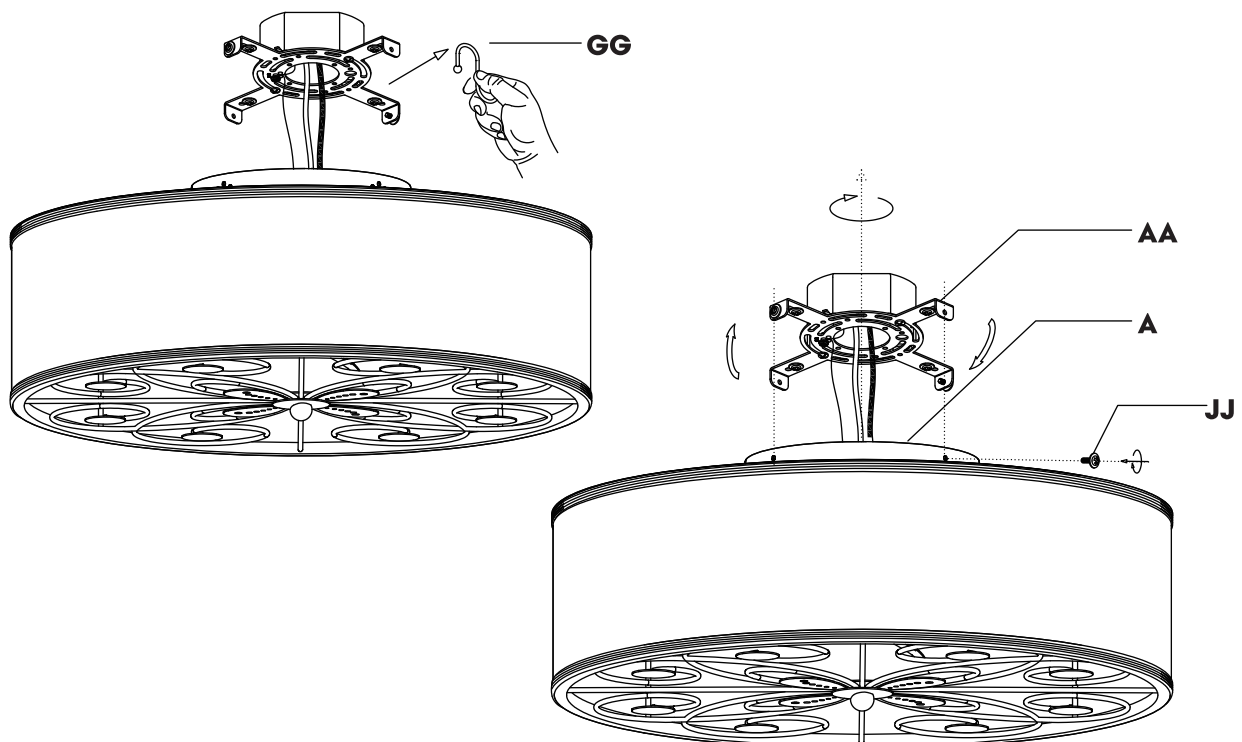

04

REMOTE CONTROL INSTRUCTIONS

1. Insert 2 batteries before using: AAA 1.5V battery x 2pcs (not included).
2. Mark and drill screw holes in the wall, then insert the remote holder anchors.
3. Use Self-Drilling Anchor to fix the remote holder onto the wall.

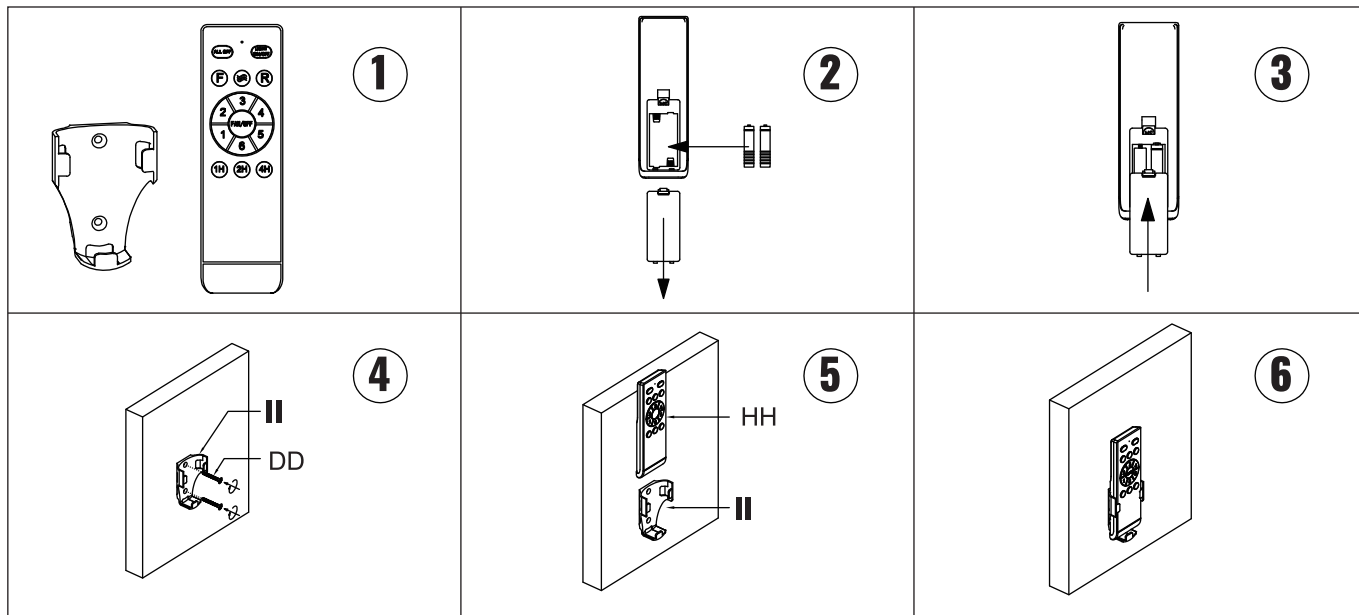


NOTE:

Please insert 2 batteries before using. AAA 1.5V battery x 2pcs (not included)


- ①: Turn off the fan and lights.
- ②⑦: "F" refers the fan rotates forward. "R" refers the fan rotates in reverse.
- ③: 1/2/3/4/5/6 for fan speeds.
- ④: 1H/2H/4H for timing the fan.
- ⑤: Turn on/off the lights.
- ⑥: Natural wind of the fan, fan speed will change automatically when use this function.
- ⑧: Turn off the fan.

REMOTE SIGNAL PAIRING: If the remote control loses signal of the fan, turn off the power from wall switch, then turn it on, press ⑧ immediately for around 3 seconds, after the fixture beeps or flashes, then it's done.

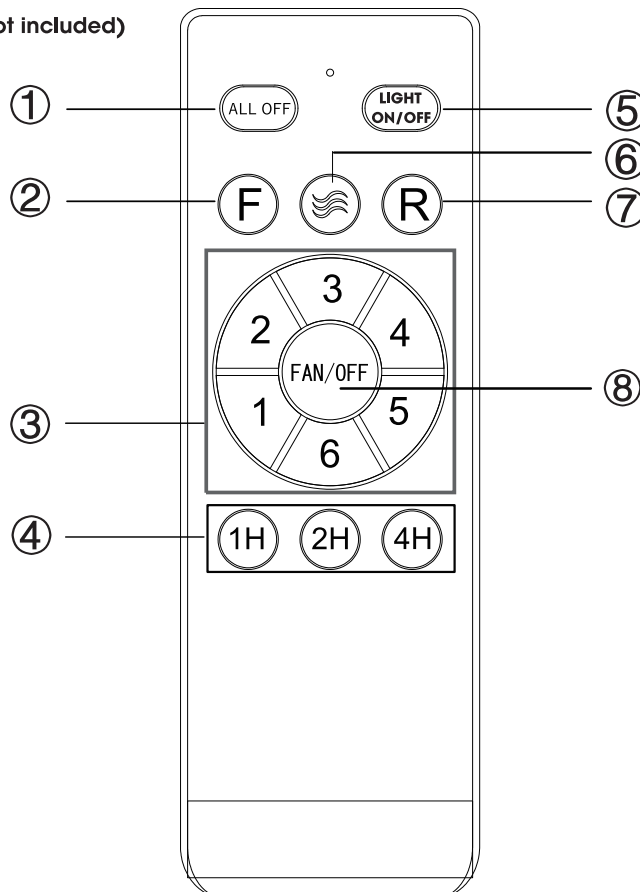

05

APP CONTROL INSTRUCTIONS

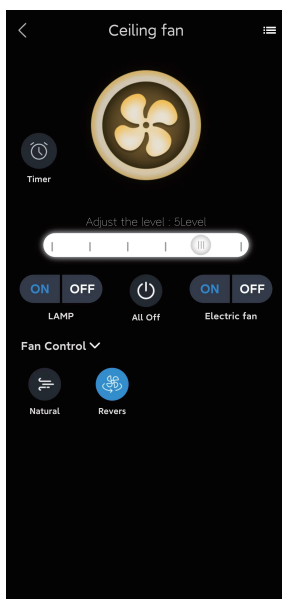

Pairing: Add device → Follow the APP operation to turn off the wall switch, and turn it on after 5 seconds.

The device will automatically connect to the Ceiling Fan.

	Slide to adjust the Fan Speed.
	Turn on/off the light.
	Turn on/off the fan.
	Turn off the fan and light.
	1H-8H for timing the fan.
	Natural Wind: Simulate natural wind and automatically adjust the wind speed.
	Fan forward & Fan reverse.