



Tools Required

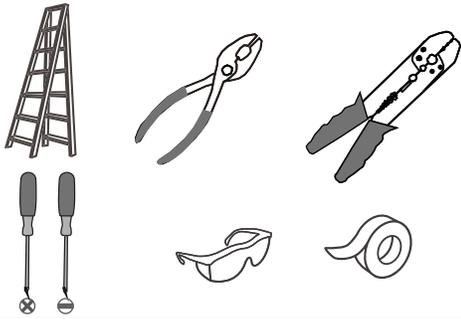

Light Source

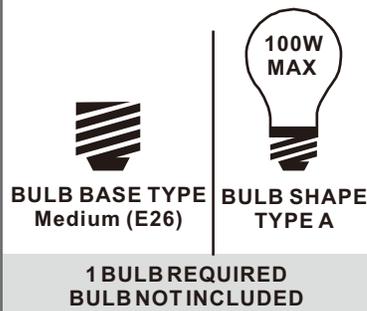

Fixture Height Adjustable 13.75" to 51.25"

⚠ Warnings and Cautions

Turn off the electricity at the circuit breaker before installation. Consult a licensed electrician if in doubt about installation.


Turn off power to the fixture and allow the bulbs to cool before replacing.

Package Contents

Preparation: Identify and inspect all parts before beginning the installation.

Missing or damaged parts? Contact your original place of purchase.

PARTS BAG




A Crossbar Assembly
x 1



B Outlet Box Screw
x 2



C Wire Connector
x 3




D Ceiling Canopy Assembly
x 1



E 6" L Rod
x 2



F 12" L Rod
x 2

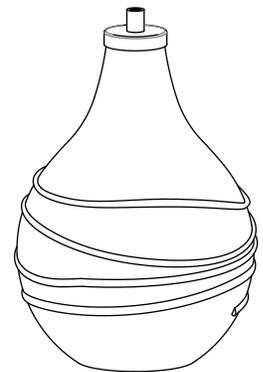

G Fixture Body
x 1


Table of Contents

Crossbar Assembly	Ceiling Canopy Assembly & Downrod	Wiring	Ceiling Canopy	Bulb
STEP 1	STEP 2	STEP 3	STEP 4	STEP 5

STEP 1


1

Step 1
Install crossbar assembly

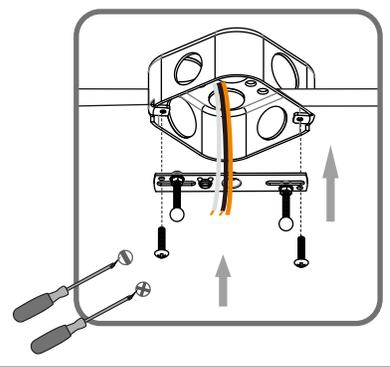


2

Step 2 - 3
Test fitting ceiling canopy to mounting screws



3

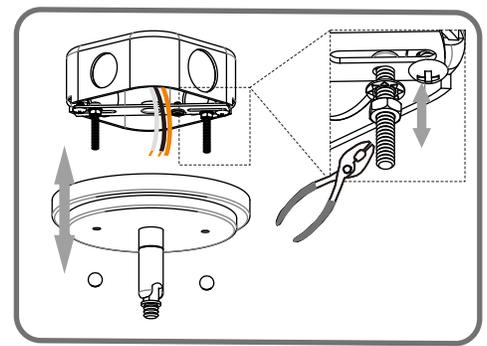


STEP 2

OPTION 1 Pendant —


1

Install rods

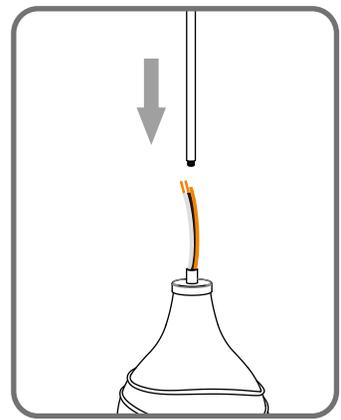


2

Tighten hex nut inside of the ceiling canopy



3

Install Ceiling Canopy



Optional Rods


8' ceiling:
(2) 12" L rods
9' ceiling:
(2) 6" L + (2) 12" L rods



OPTION 2 Semi-flush




1

Remove swivel

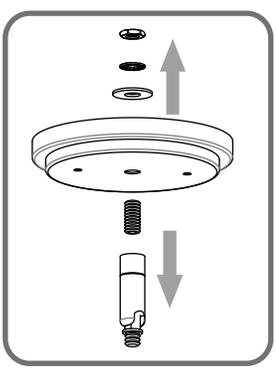


2

Install ceiling canopy

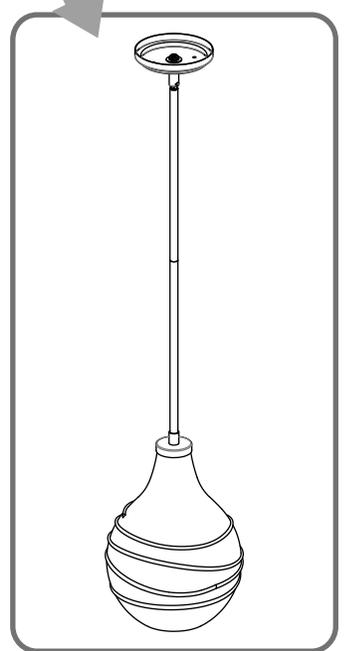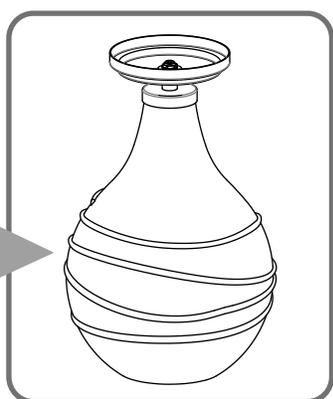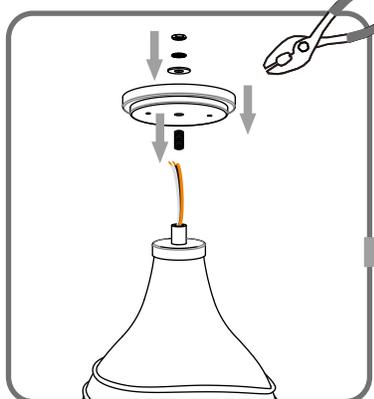




STEP 3

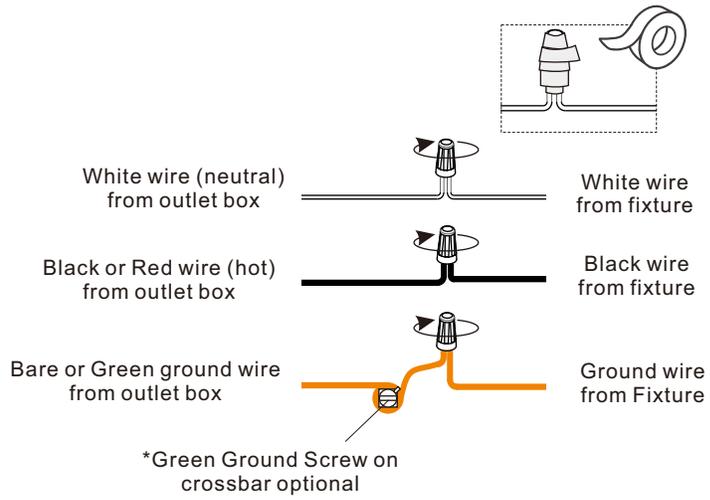

STEP 4

OPTION 1

OPTION 2

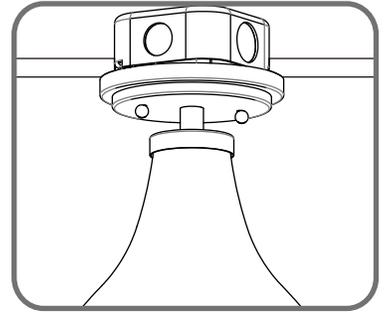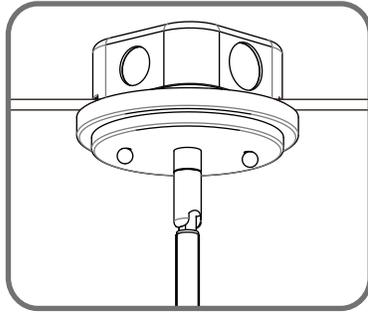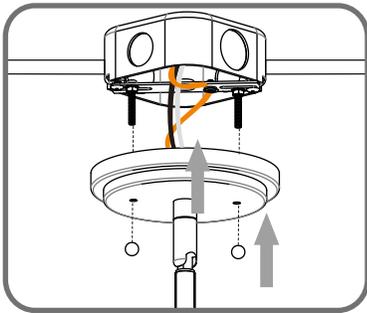

STEP 5

OPTION 1

OPTION 2

