


Installation manual

Dimensions : L73.6"*W21"*H69.6" L11
Bulb Type : E26 bulb not included
Lamp Frame Weight : 11.5 LBS
Total Weight : 16 LBS

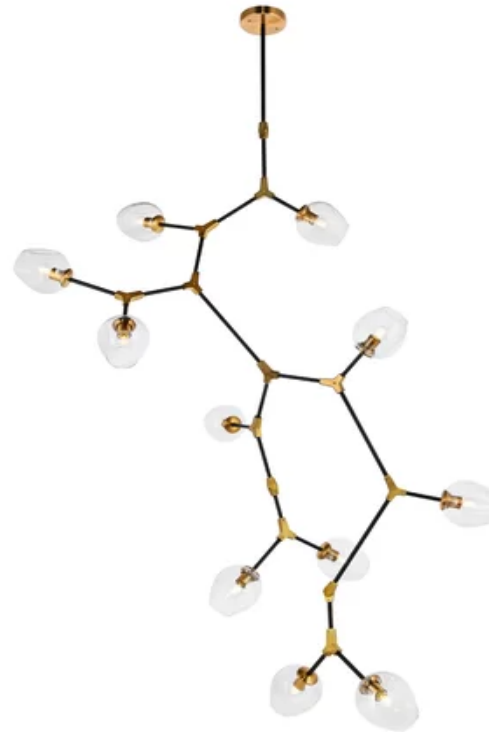


SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF, BY EITHER REMOVING THE FUSE OR TURN OFF THE CIRCUIT BREAKER.

CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

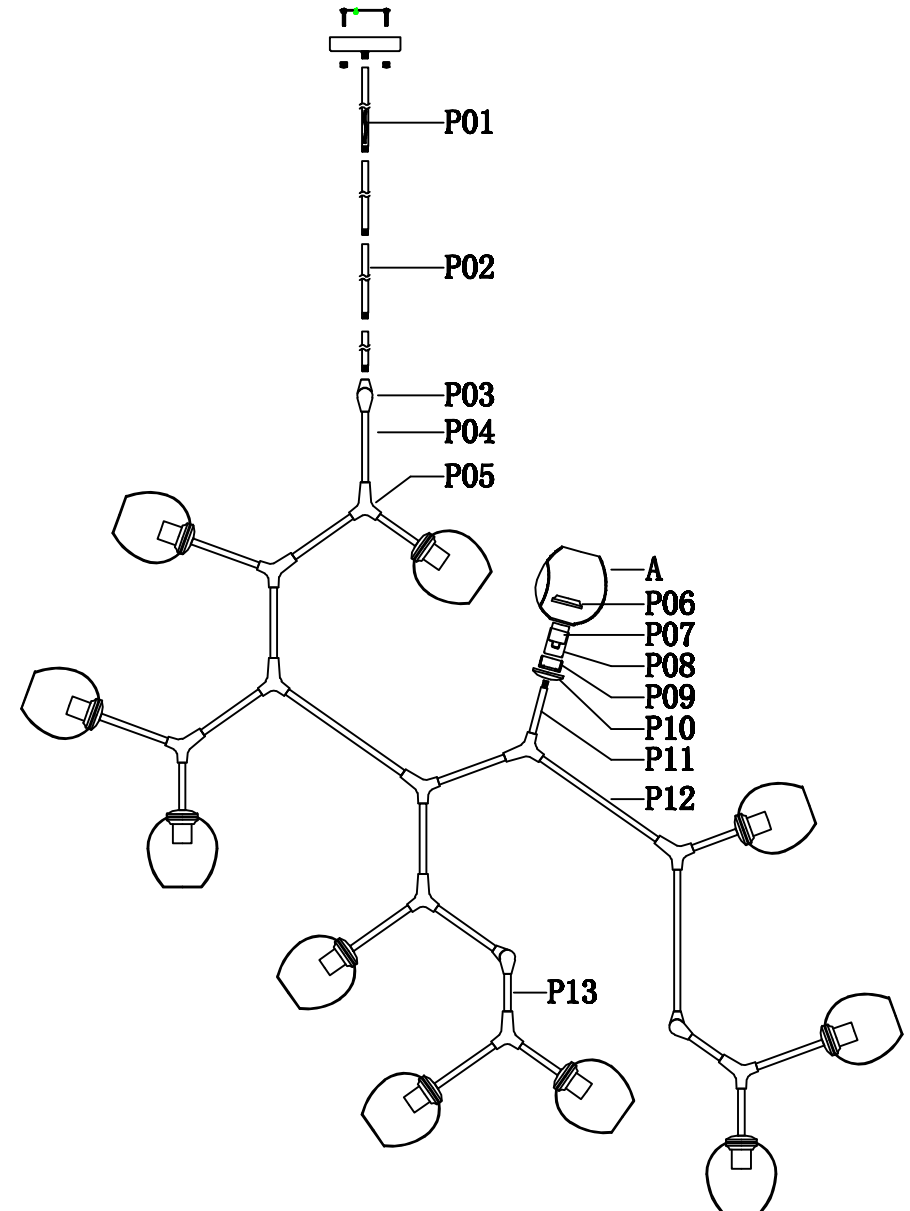










Frame Assembly Diagram













Step 1

Please use the partslist to ensure you are not missing any parts.


PARTS LIST

Part	Picture	Description	Parts number	Qty	Check list
ZA		Junction box not included		1	
ZB		Crossbar D4"	CP401712R59LAB	1	
ZC		Crossbar Screws		2	
ZD		Ceiling Plate (D5.9" * H1")		1	
ZE		Nut		2	
ZF		ground wire		1	
ZG		junction caps		2	
P01		Power Cord 59" / SPT-1-18# Black		1	
P02		Metal Rod D0.53" * L6" + 12" + 12" + 16"	ROD4013FB	1	
P03		Movable joint		3	
P04		D0.53" * L6" Metal Rod		12	

Part	Picture	Description	Parts number	Qty	Check list
P05		"Y" joint		10	
P06		Metal ring		11	
P07		E26 lampholder		11	
P08		D1.5" * H2.2" lamp cup		11	
P09		Metal joint		11	
P10		Metal plate		11	
P11		D0.53" * L4" Metal Rod		6	
P12		D0.53" * L12" Metal Rod		3	
P13		D0.53" * L3.15" Metal Rod		2	
A		Glass	GLASS1712CL	11	

Step 2

Canopy Installation Instruction

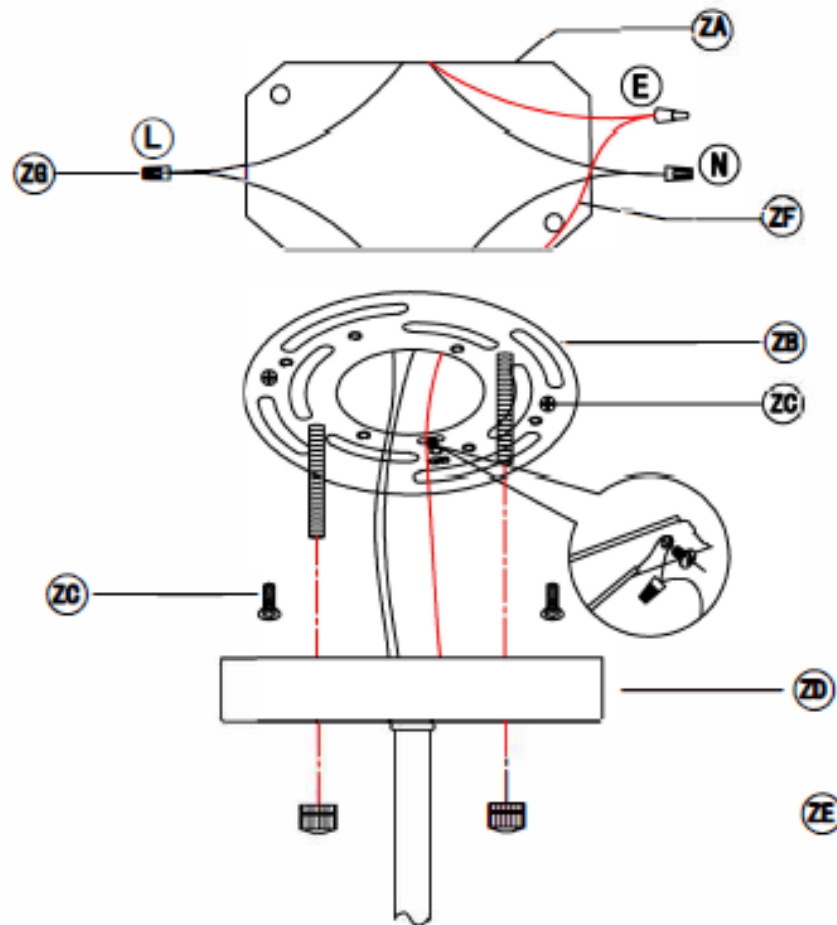


IMPORTANT: Test sockets with bulb before dressing the fixture.

- 1 .Attach the crossbar to the electrical box.
- 2 .Pass the lamp wire and ground wire through the loop, canopy ring and center hole of canopy cover.
- 3 .Screw 2.5" threaded pipe into the crossbar and fasten with hex-nut.
- 4 .Pull wires up through the nipple.
- 5 .Screw loop only onto threaded pipe.
- 6 .Hang the fixture on chain.
- 7 .Make the electrical connections as detailed in the drawing above.
- 8 .Secure the canopy cover with threaded canopy ring .

Step 3

Frame Assembly Diagram

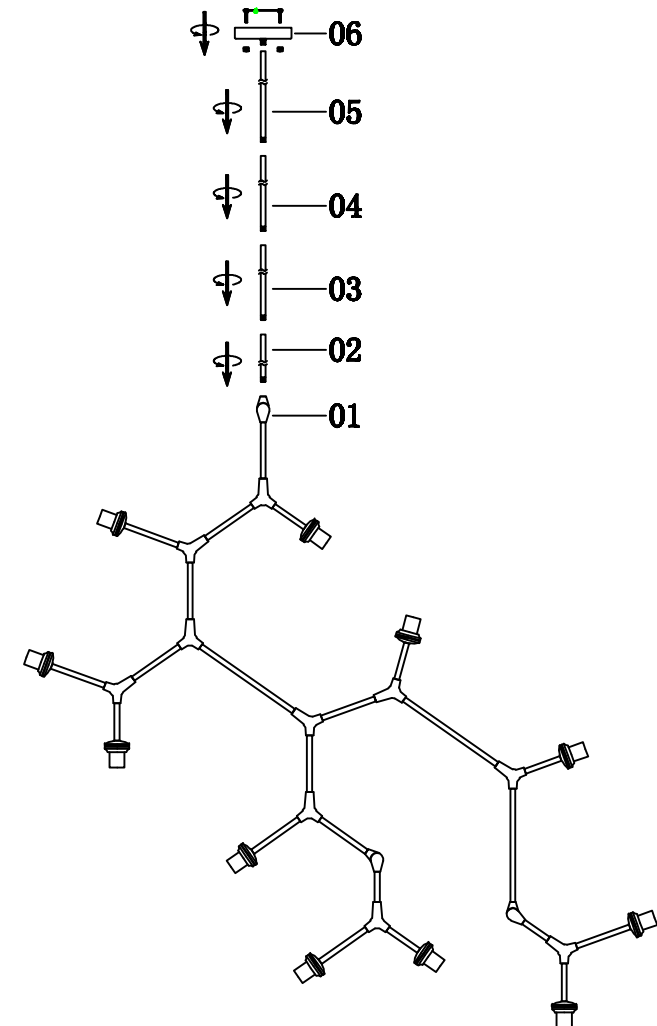

Frame Assembly Instructions


Installation:

Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

1. Fix the iron tube(02)、(03)、(04)、(05)and ceiling plate(06)on the movable joint(01).
2. Hang the canopy parts on the Ceiling Plate.
3. Fasten the fixture loop to hang the whole fixture.

Step 4

Crystal Dressing Diagram

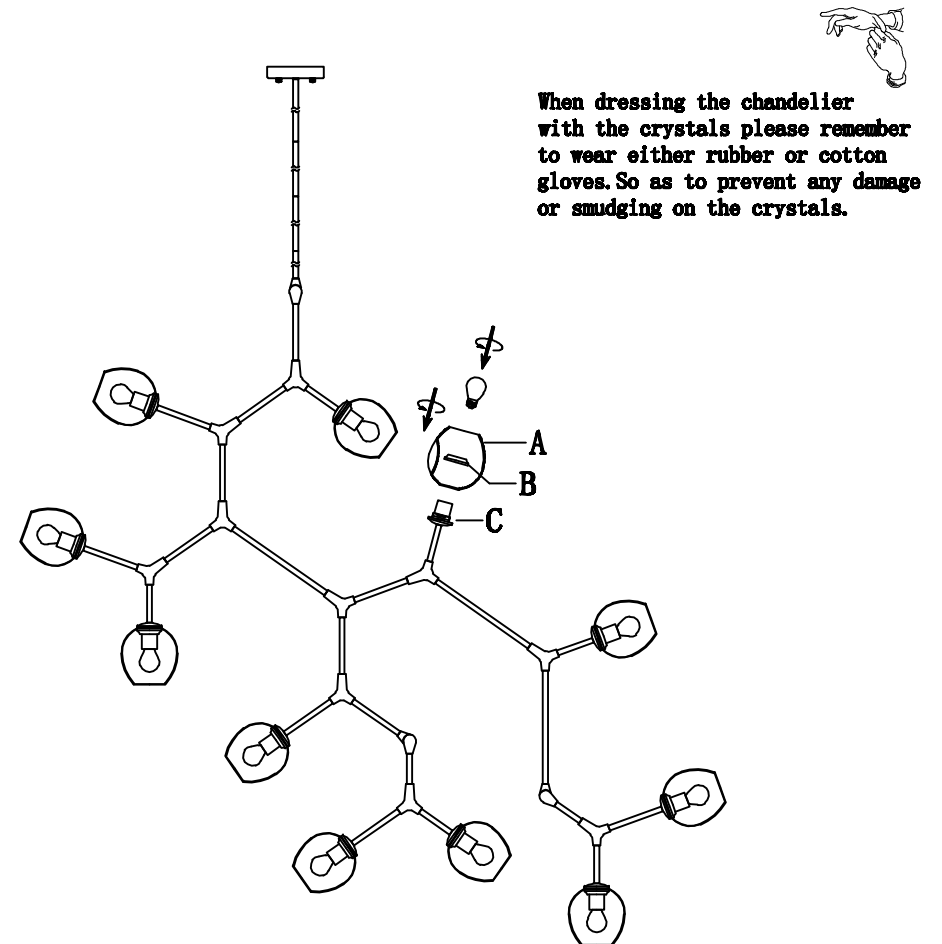

1. Install the glass(A) to the lamp holder(C)and fix it well by metal ring(B).
2. Screw the Bulb on the Lamp Holder.

Cleaning and Maintenance of Chandelier Frame

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.