



Awaken® G90 | K-98361-Y

27" three-function handshower kit, 2.5 gpm

Features

- Advanced spray engine provides three alternate experiences: wide coverage, intense drenching, and targeted spray
- Wide coverage spray produces an encompassing spray for everyday use
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Thumb tab allows for a smooth transition between sprays
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.5 gpm (9.5 lpm) maximum flow rate at 45 psi (3.1 bar)
- Slidebar features adjustable mounting brackets for installation flexibility
- 60" (1524 mm) hose length



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
BN	Vibrant Brushed Nickel
BL	Matte Black



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-30-2026 03:31 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992

Technical Information

All product dimensions are nominal.

Flow Rate
Handshower Rated Maximum 2.5 gpm (9.5 l/min)
Flow:

Material

- Durable material construction
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories


K-23723 Faucet cleaner
K-30646 Showerhead filter
K-30647 Showerhead replacement filter, two-pack

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



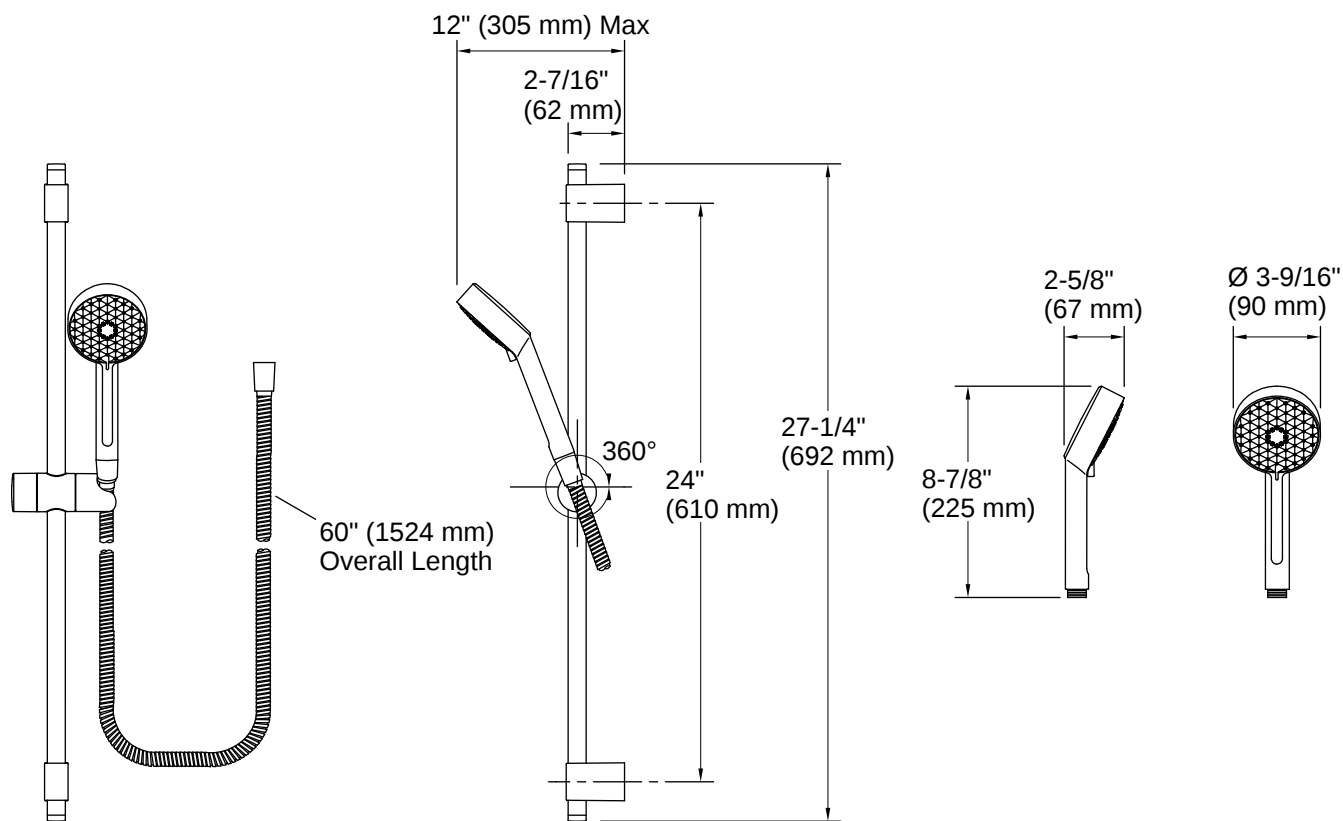

Installation

- Wall-mount

Installation Notes

Install this product according to the installation instructions.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.

Mount the sidebar to stud framing or install backing support.

For tile or other solid finish surfaces: Predrill mounting holes through surface material only; do not drill into the stud.

For drywall surface: No predrill is required.

NOTE: The mounting brackets can be adjusted to align with existing holes for retrofit installations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 03:31 - US-CA

THE BOLD LOOK
OF **KOHLER**