








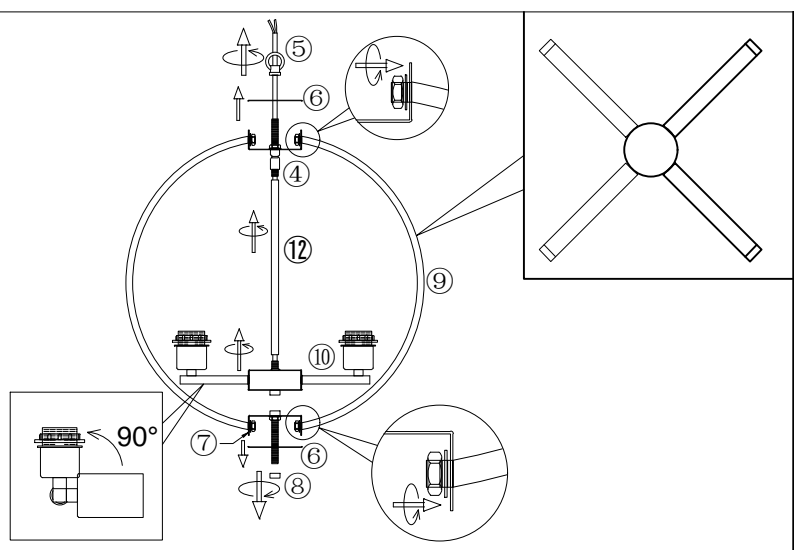
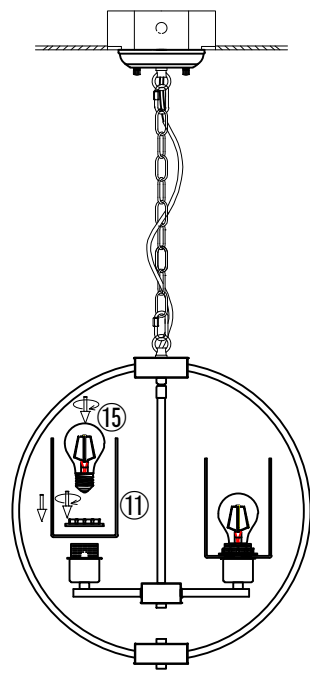
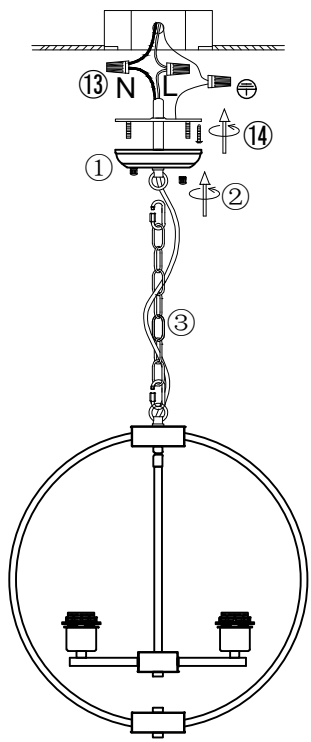


①	canopy 1PCS  ②cap nut 2PCS	⑪	 glass lampshade 4PCS
③	chain 1PCS	⑫	hanging tube 1PCS
④	⑤hanging ring 1PCS ⑥cover 1PCS upper connected box 1PCS		 X 1PCS
⑦	down connected box 1PCS ⑥cover 1PCS ⑧end cap 1PCS		 X 3PCS
			 X 3PCS
⑨	 bended metal profile 4PCS		 X 3PCS
⑩	 lighting fixture 1PCS		 X 3PCS



1. Rotate to loosen the ring ⑤ to remove out the ring ⑤ and cover ⑥ from the box ④, rotate end cap ⑧ to remove out the end cap ⑧ and cover ⑥ from the box ⑦.
2. Remove out the nut and washer from the profile ⑨, install the profile ⑨ to up and down box with nut and washer, close back the cover ⑥ to the upper box with ring ⑤ and cover ⑥ to the box ⑦ with end cap ⑧.
3. Adjust the light arms to 90 degree to each other, let the wire of the fixture go through the hanging tube ⑫, rotate to install the tube ⑫ to the fixture.
4. Let the wire go through the frame ⑨, rotate to install both parts together.



5. Hang the fixture to the canopy ① with chain ③, let the wire go through the chain ③ and canopy ①.
6. Install the bracket to the ceiling junction box with screws ⑭.
7. Connect the wire to the home line with cap connectors ⑬.
8. Install the fixture to the bracket with cap nuts ②.

9. Rotate to remove out the socket ring from the bulb holder, install the lampshade ⑪ to the bulb holder with socket ring.
10. Install the bulb ⑮.

Please read carefully before installation!!!  
 Note : Please make sure that the electricity is powered off during installation !Only a professional electrician should install this kind of product !