

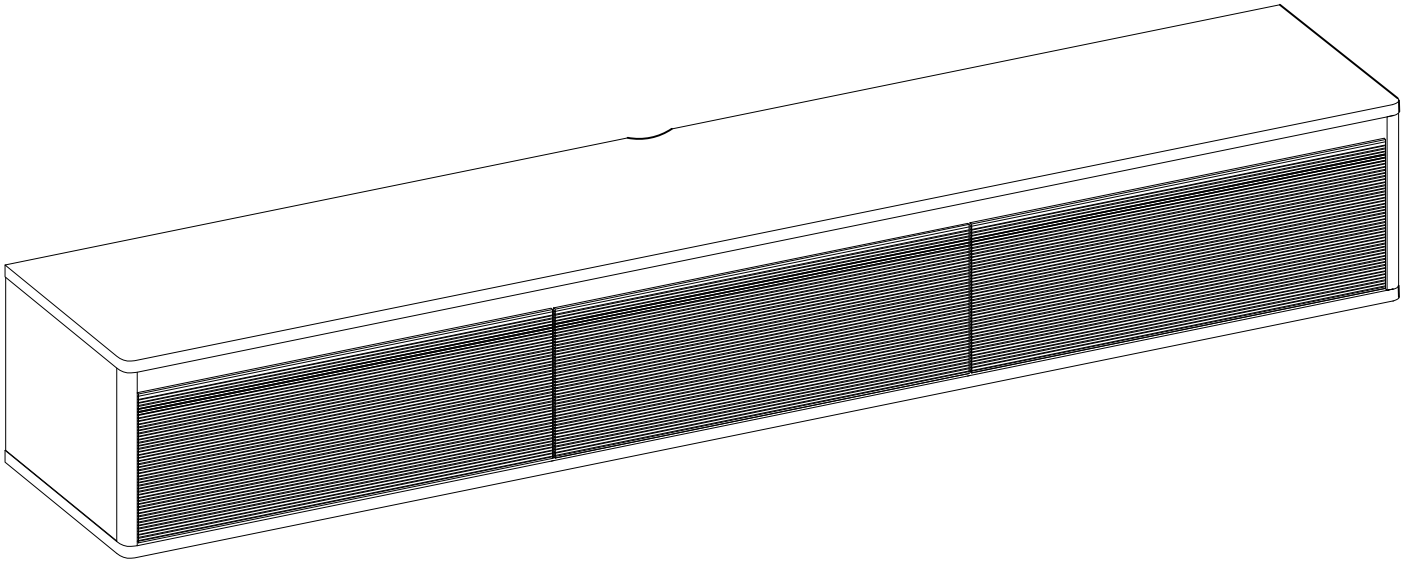
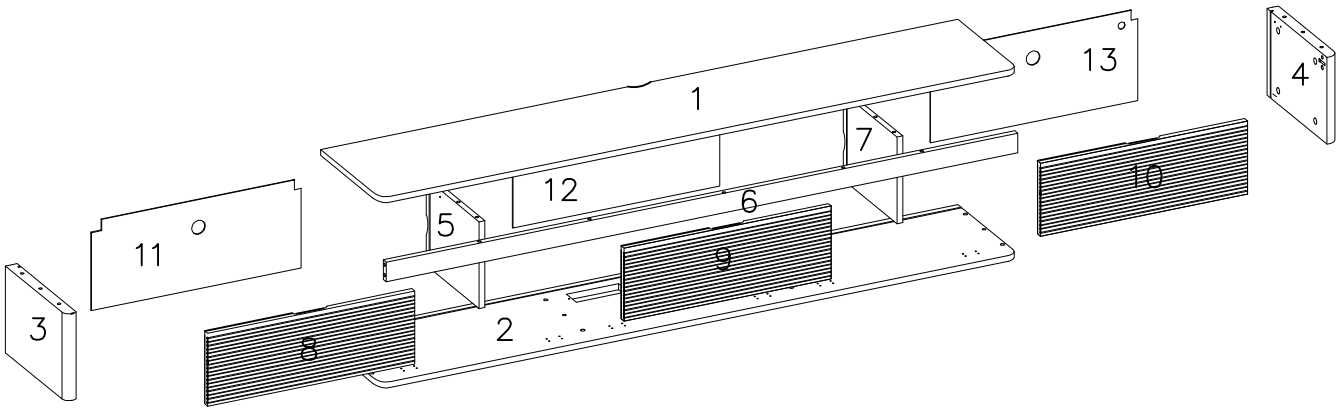











DS-TS016HT/B/W-AC




A  21pcs	B  φ8*30mm 12pcs	C  φ3.5*12mm 69pcs	D  φ3.5*30mm 8pcs	E  φ3.5*40mm 12pcs	F  8*40mm 12pcs	G  3pcs	H  6pcs
I  1pc	J  1pc	K  1pc	L  21pcs	M  12pcs	N  2pcs		

1

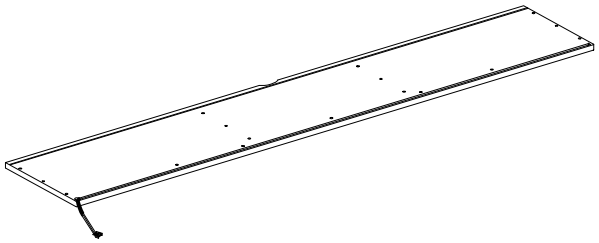


1750*310*15mm 1pc

2

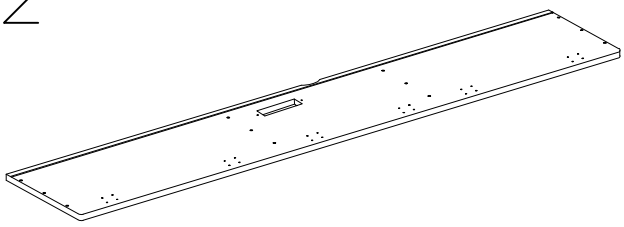


1750*310*15mm 1pc

3




220*309*30mm 1pc

4

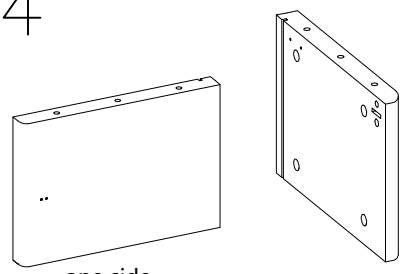


220*309*30mm 1pc

5

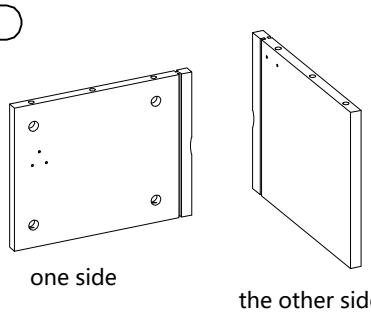


220*277* 15mm 1pc

6

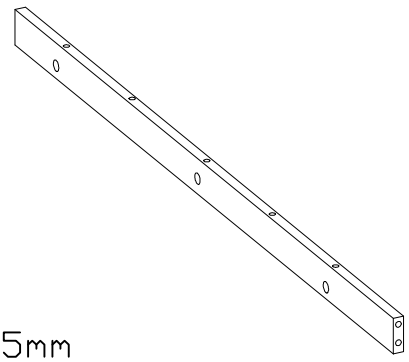


1688*50*15mm 1pc

7




220*277*15mm 1pc

8




558*185*15mm 1pc

9




560*185*15mm 1pc

10




558*185*15mm 1pc

11




230*563*3mm 1pc

12



230*554*3mm 1pc

13




230*563*3mm 1pc


Hardware installation demonstration

NOTE:Please make sure
"A1"hardware tightened
and can't be pulled out!


I

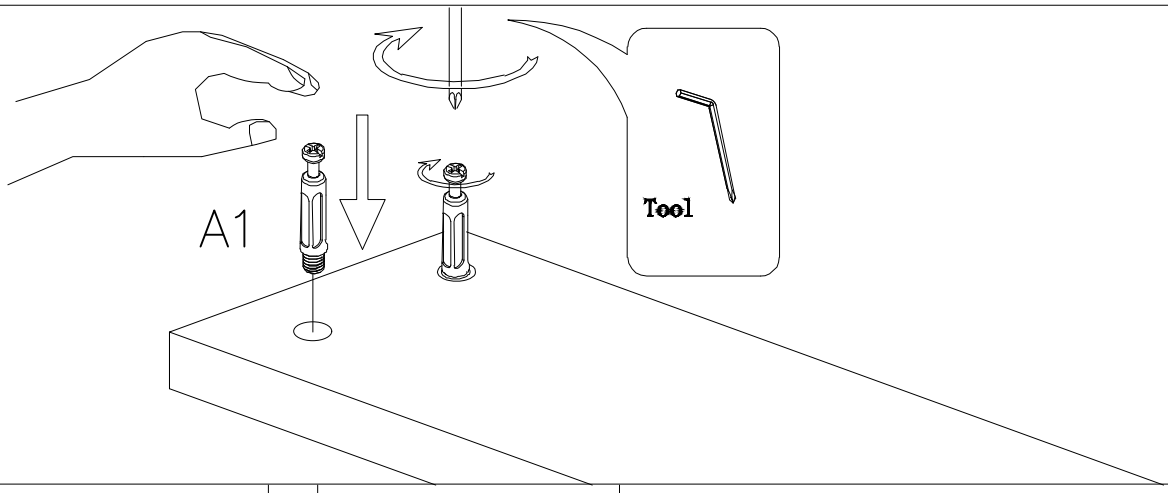


II

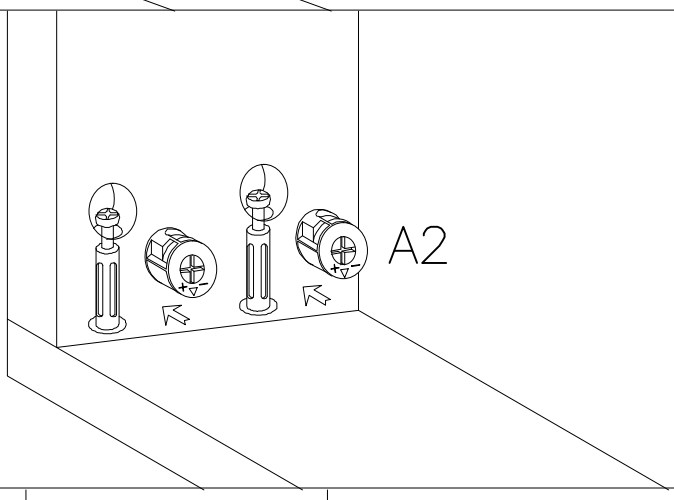

III

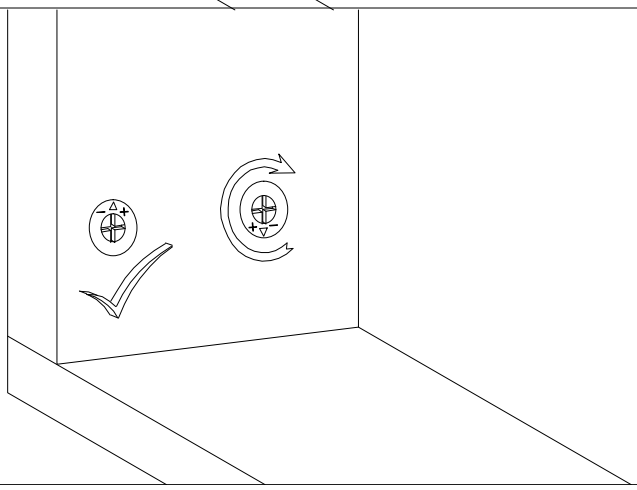


STEP 1

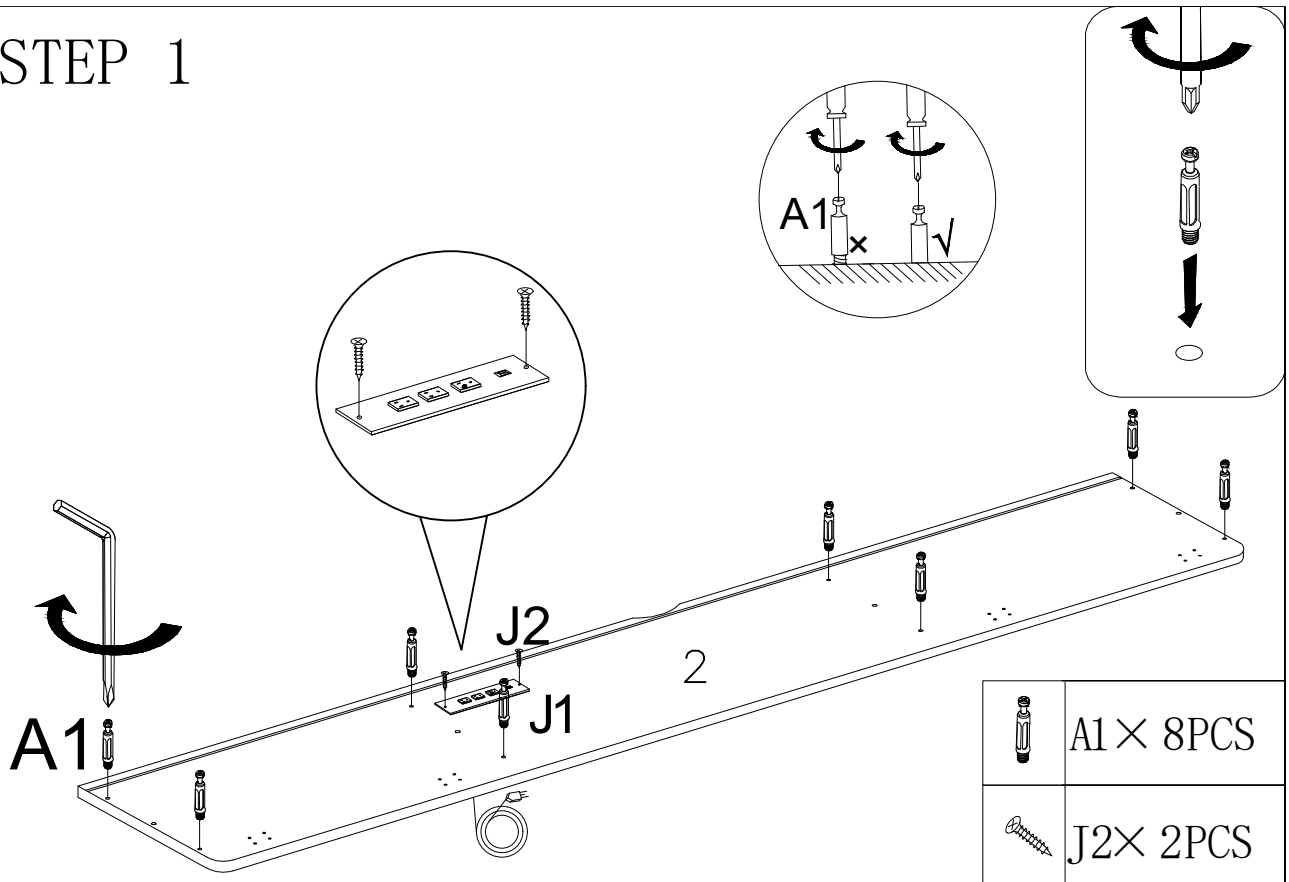


	A1× 8PCS
	J2× 2PCS
	J1× 1PC

STEP 2

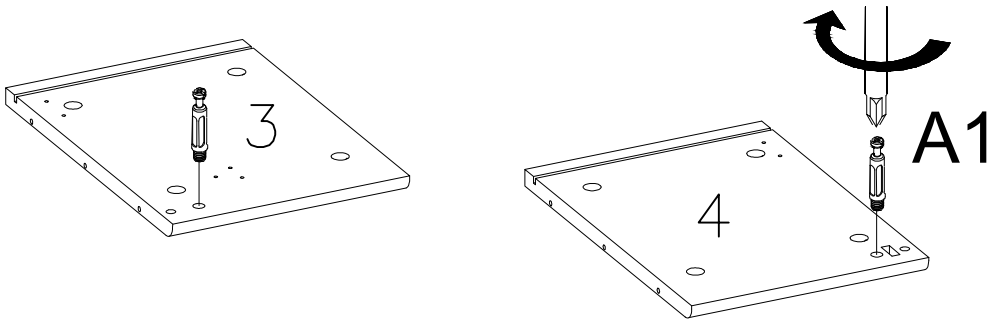


	A1× 2PCS

STEP 3

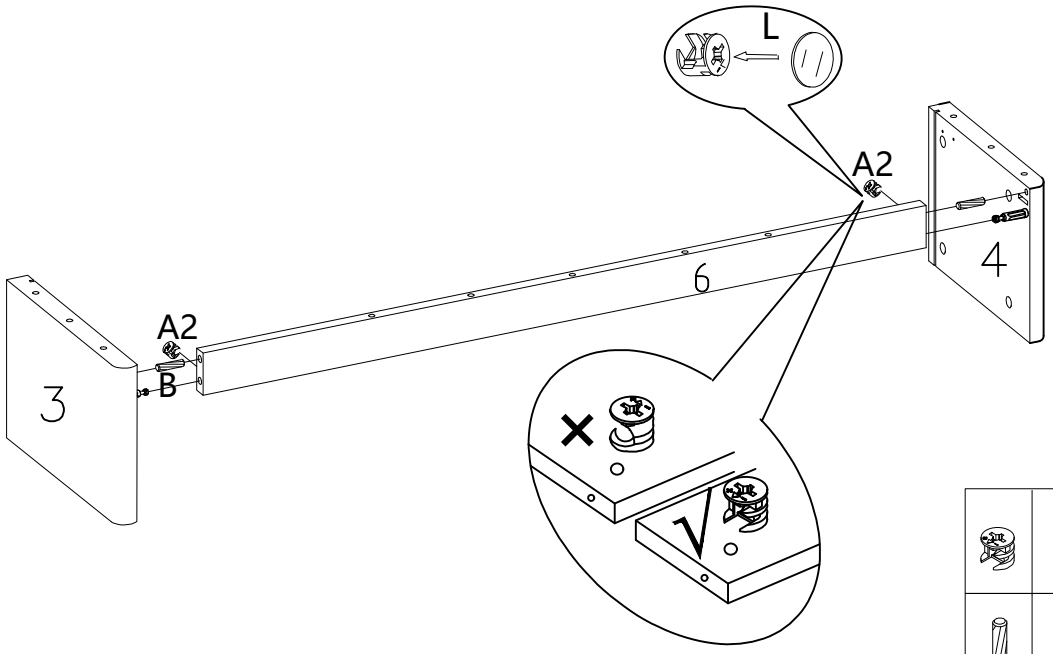


	A2× 2PCS
	B× 2PCS
	N×2PCS

STEP 4

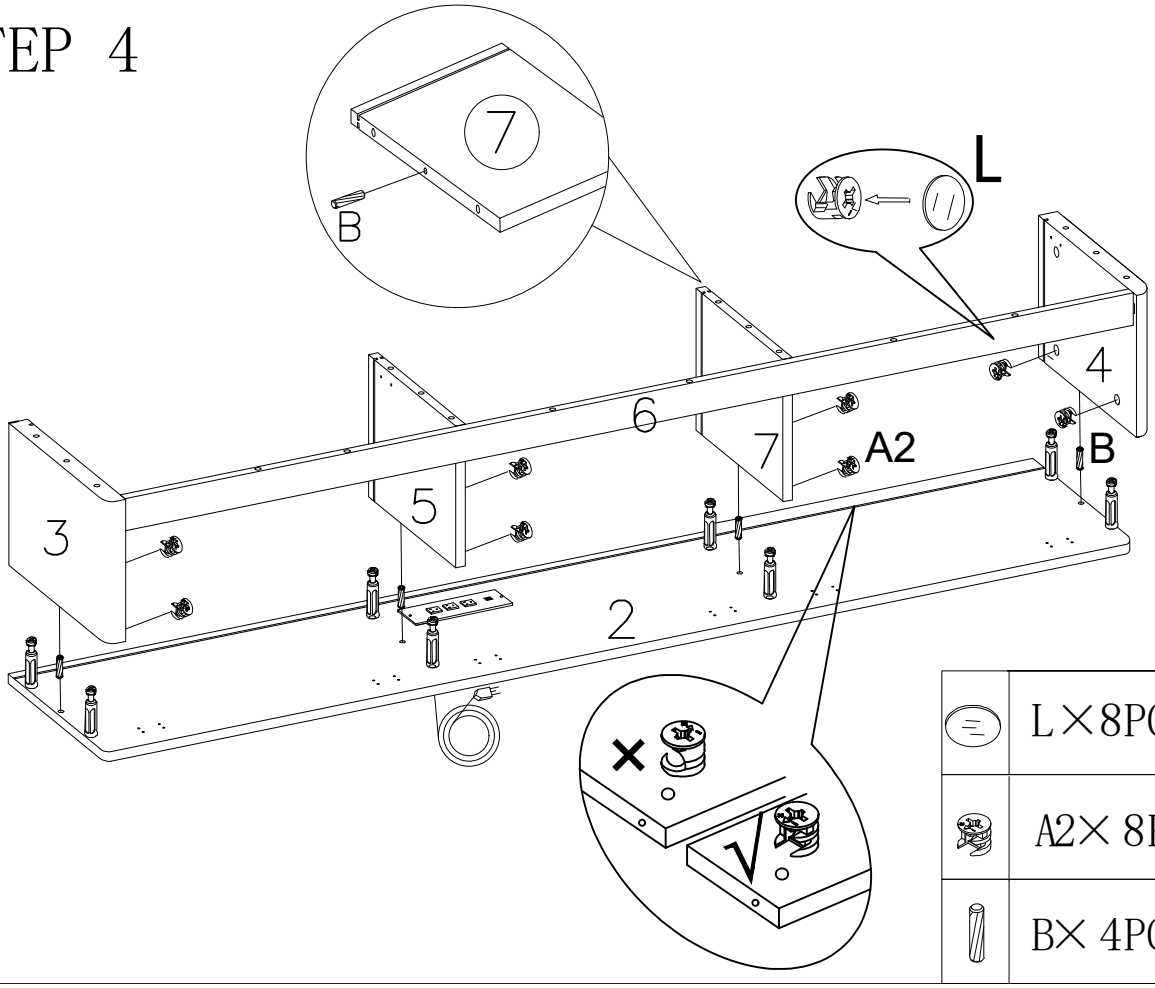



	L×8PCS
	A2× 8PCS
	B× 4PCS


STEP 5

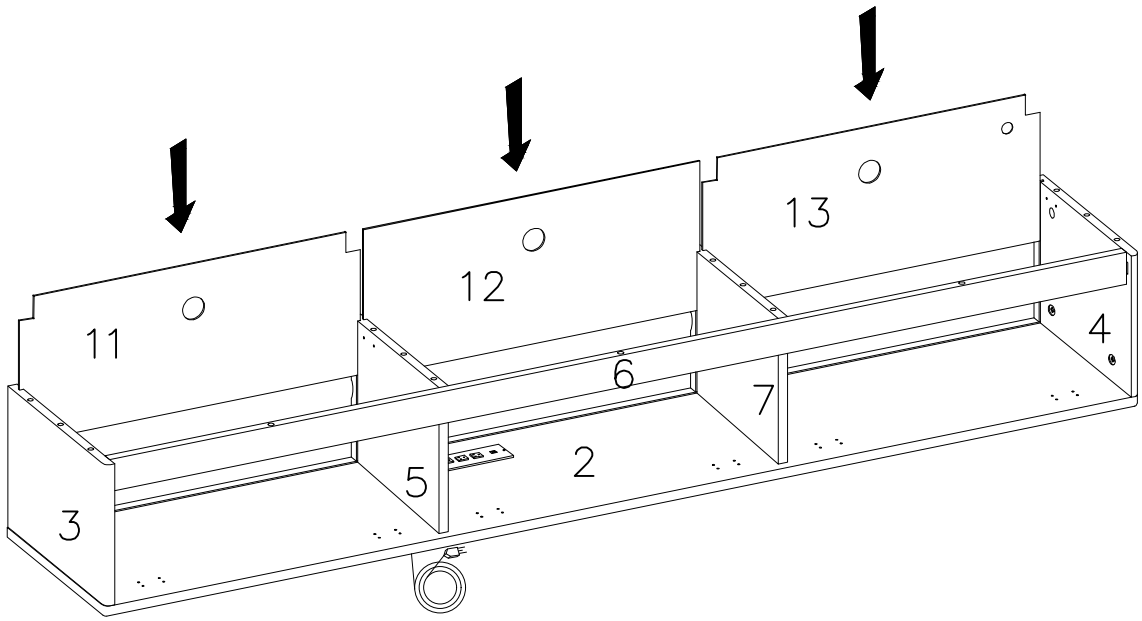

STEP 6



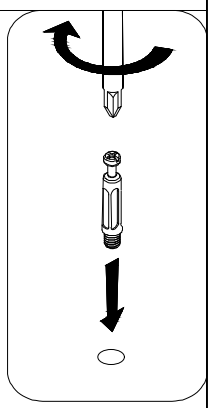


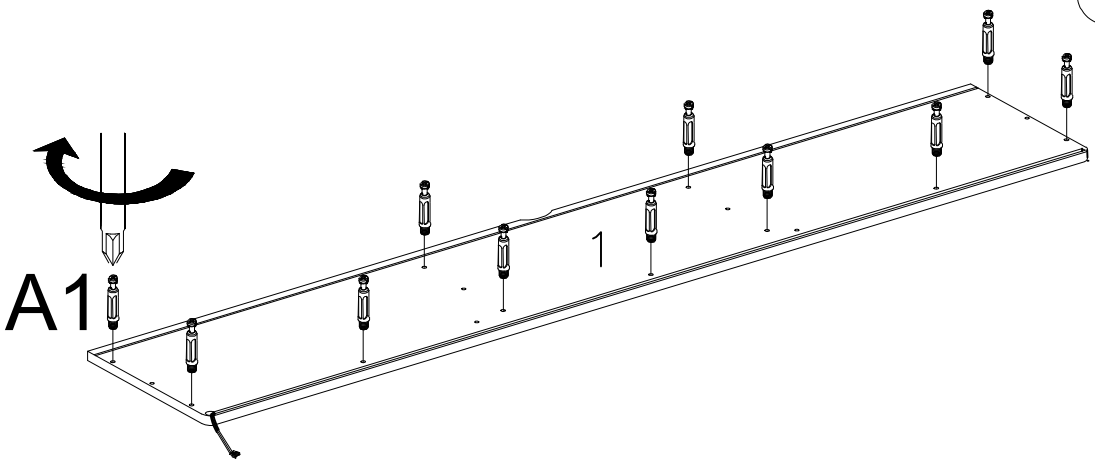




A1×11PCS

STEP 7

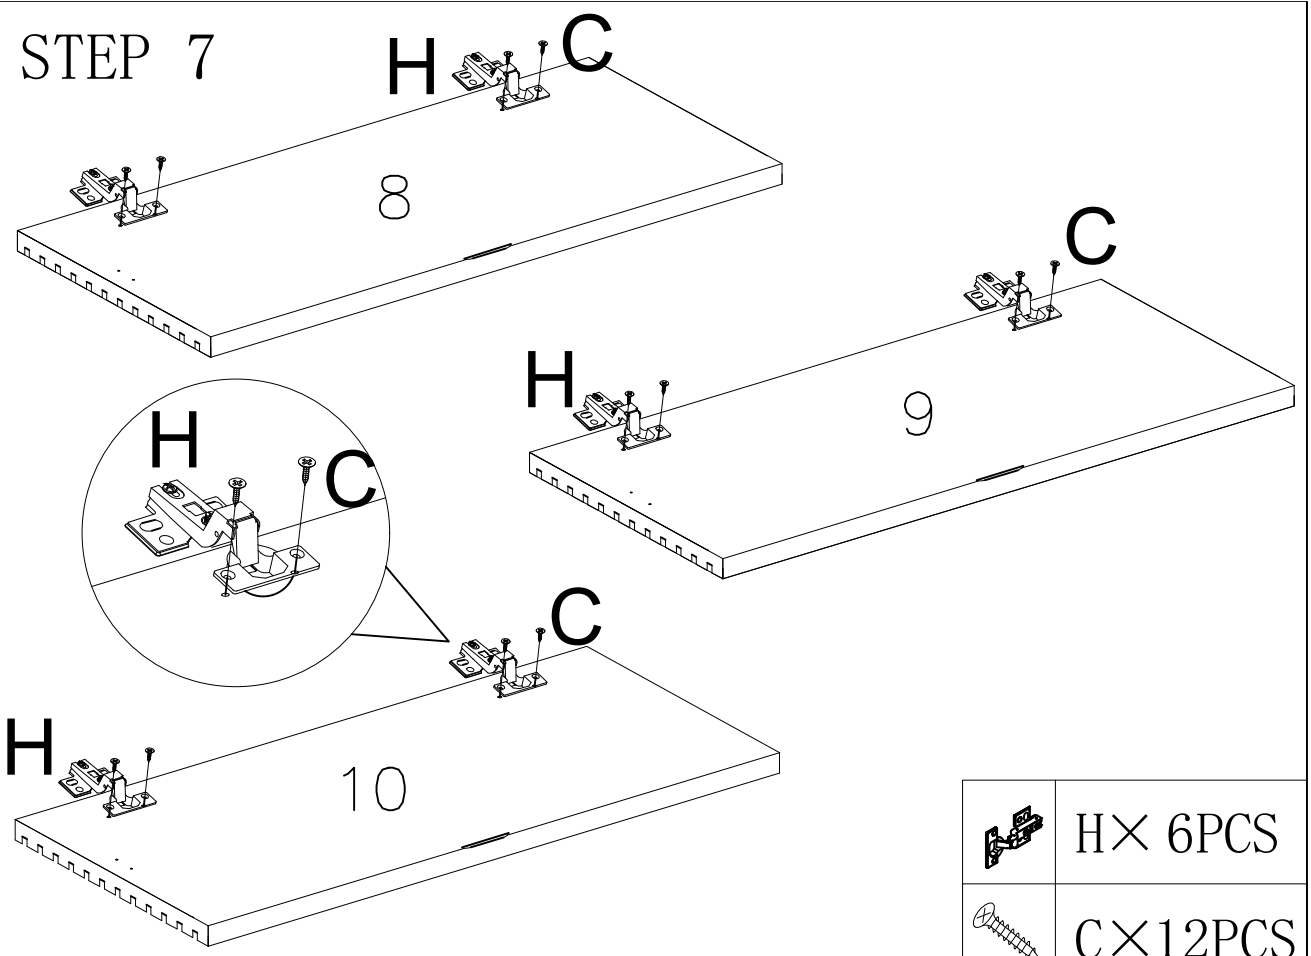


	H× 6PCS
	C×12PCS

STEP 8

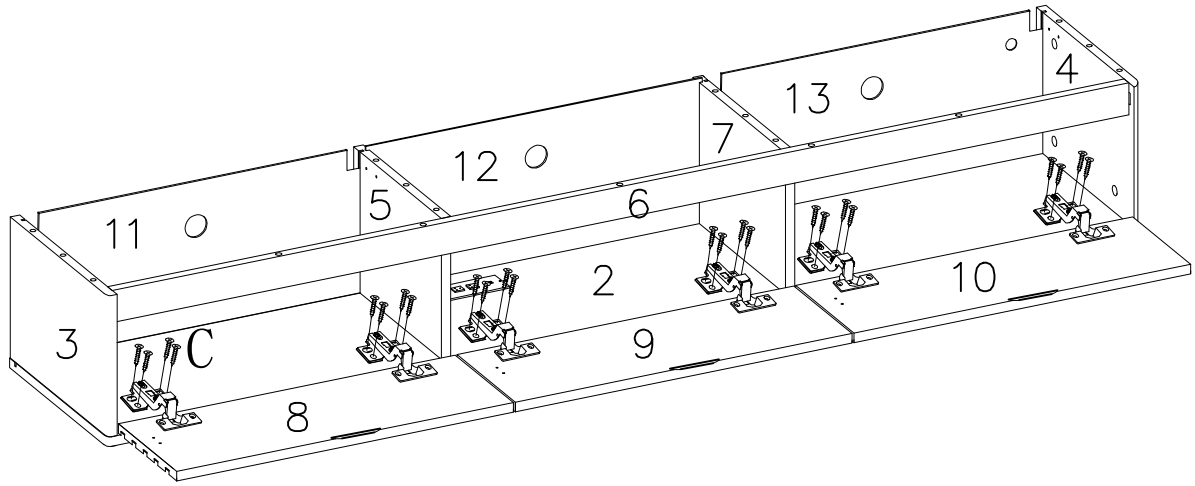


	C×24PCS

STEP 9

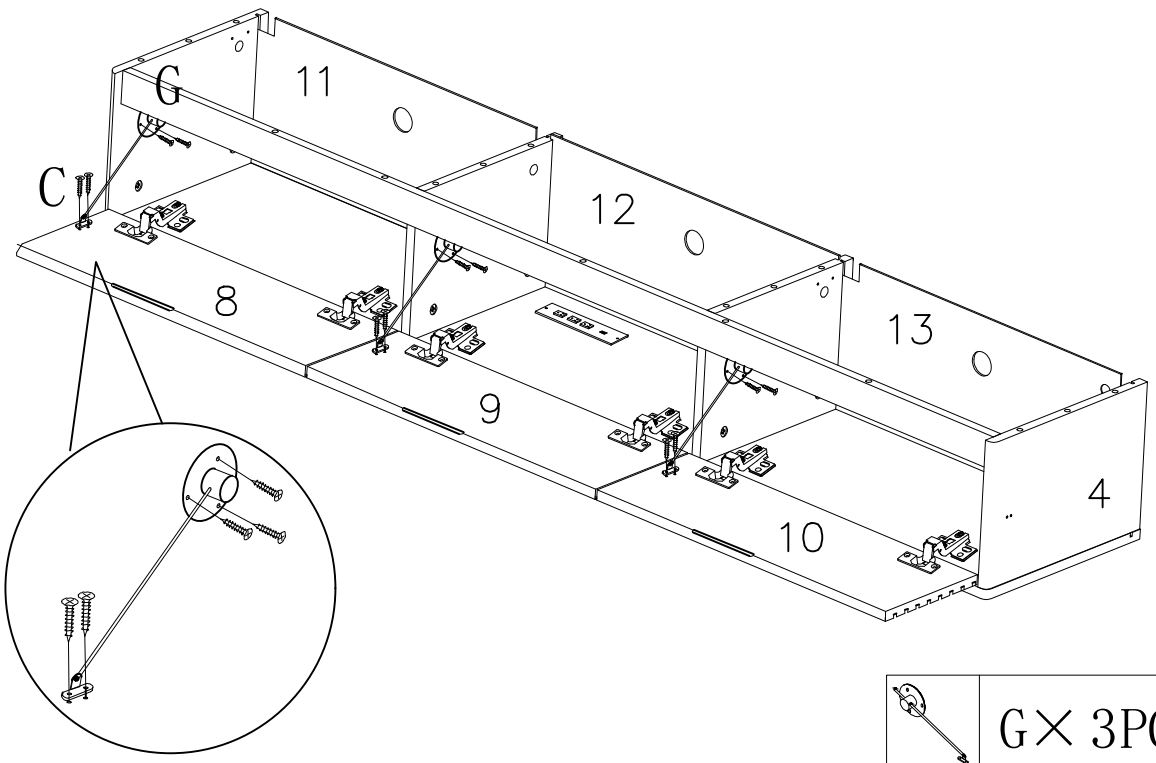


	G× 3PCS
	C×15PCS

STEP 10

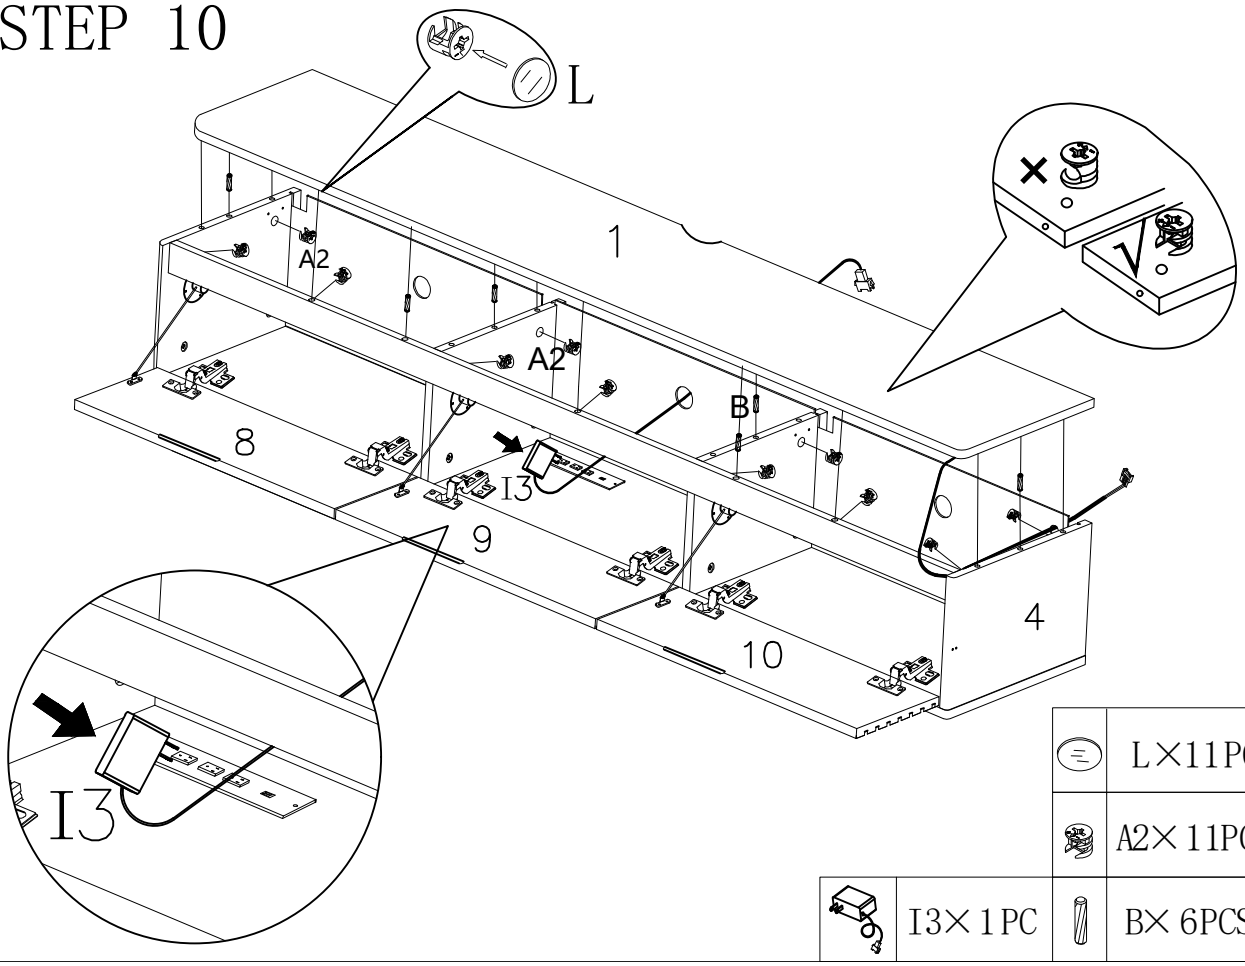


			L×11PCS
			A2×11PCS
	I3×1PC		B× 6PCS

STEP 11

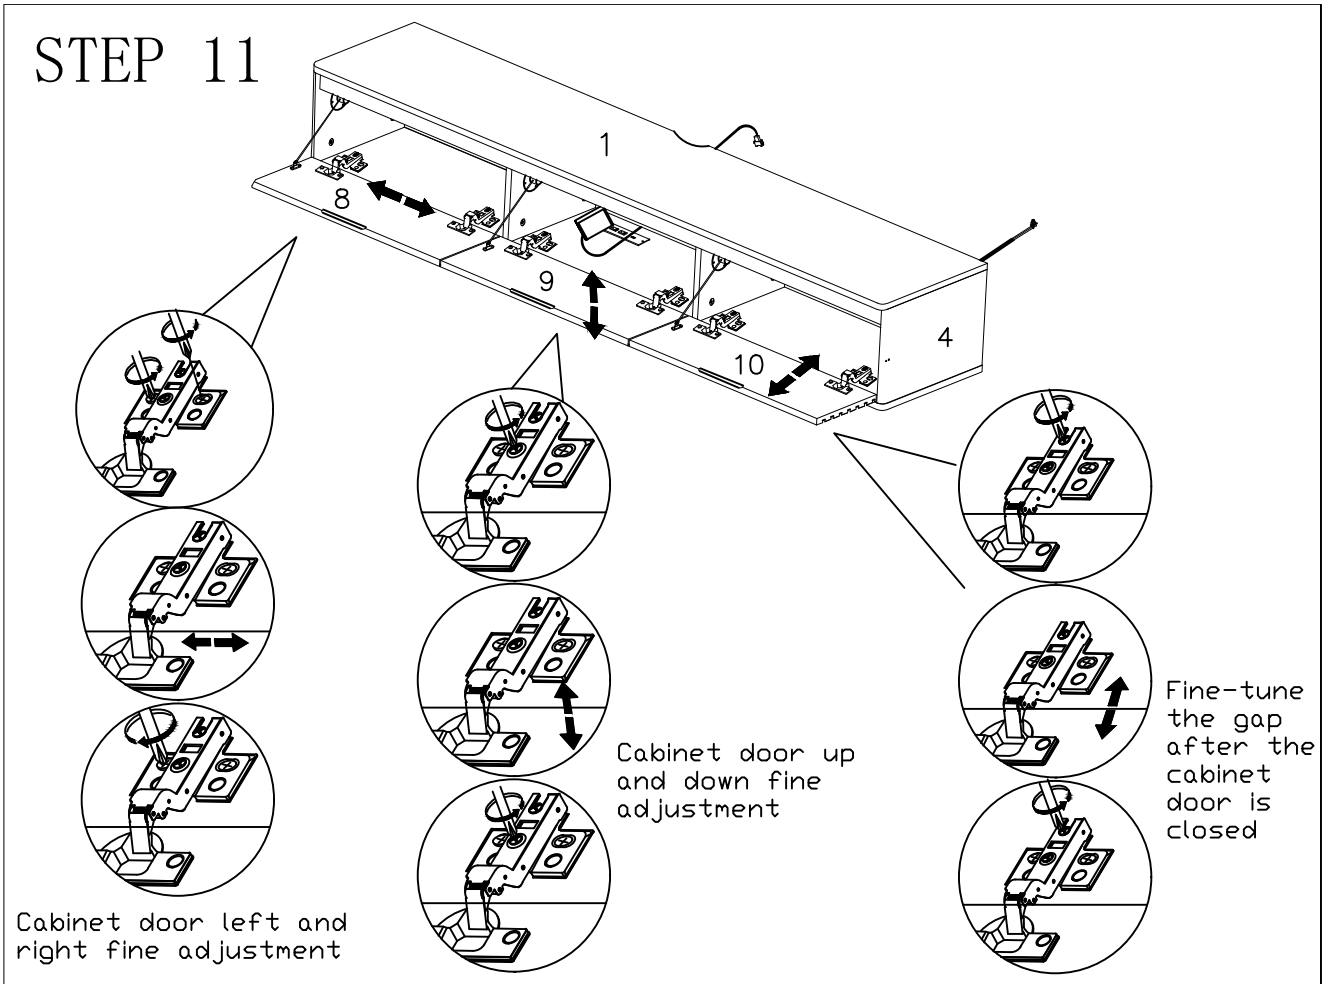


STEP 12

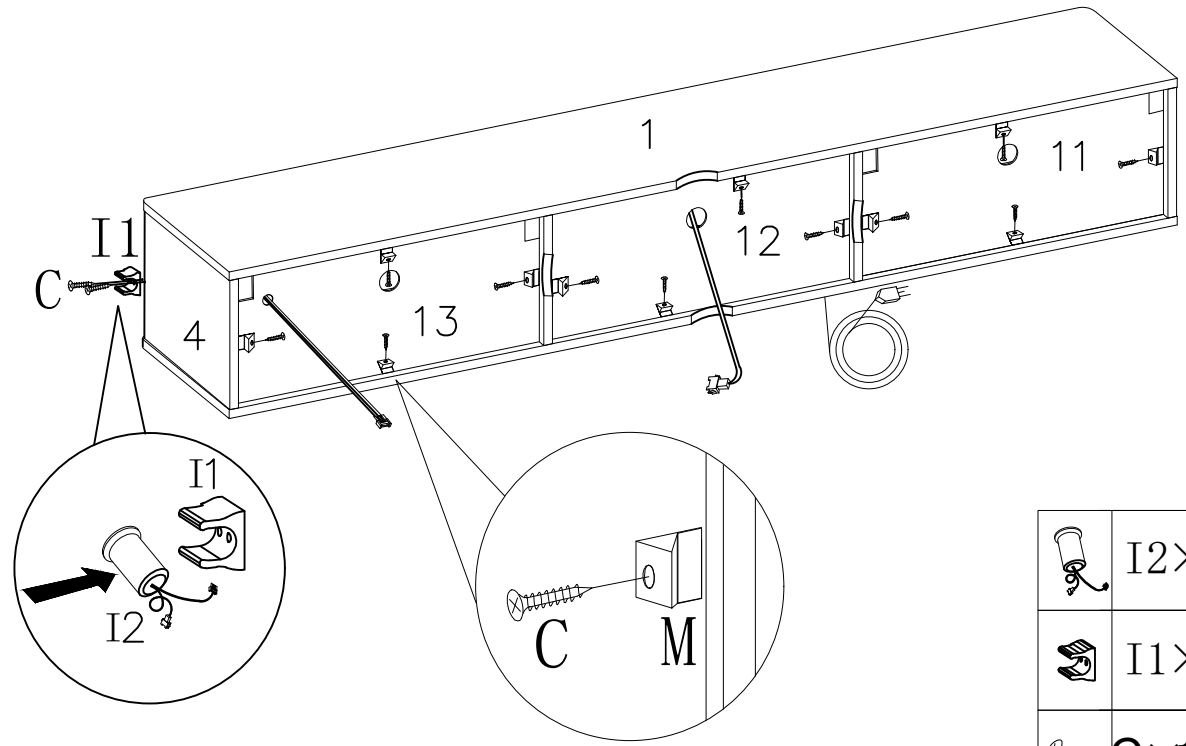

	I2×1PC
	I1×1PC
	C×14 PCS
	M×12PCS


STEP 13

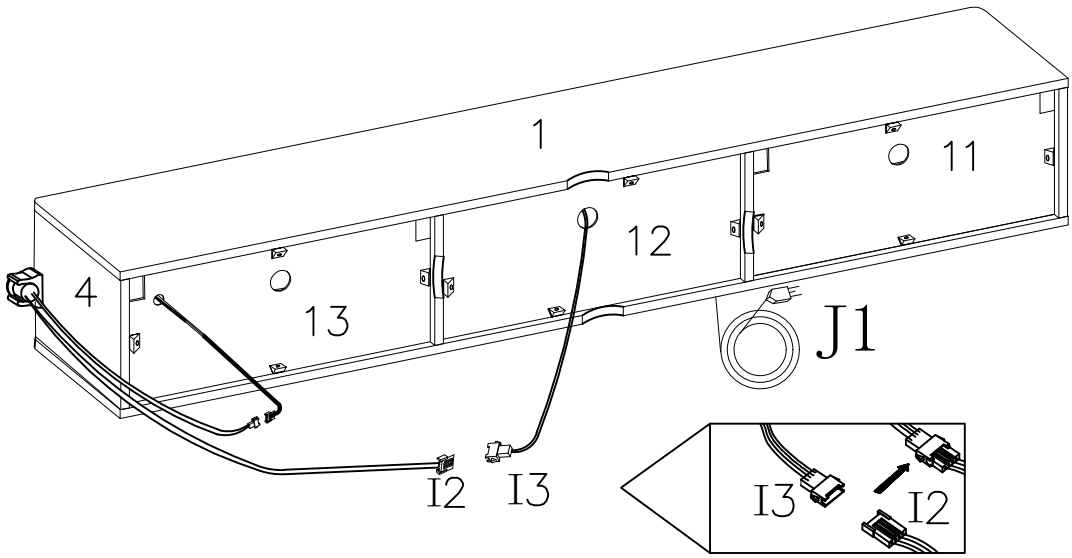



I2 and I3 are connected;
Light Strip and I2 connected

lug the J1 into the power supply !


STEP 14

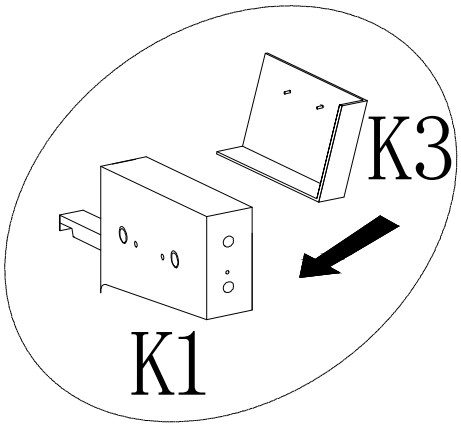

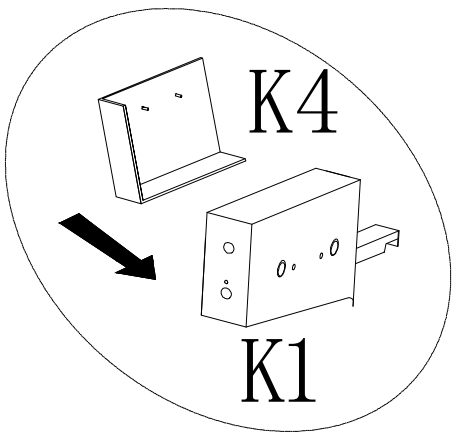




The up and down can be adjusted !




The length can be adjusted !

STEP 15

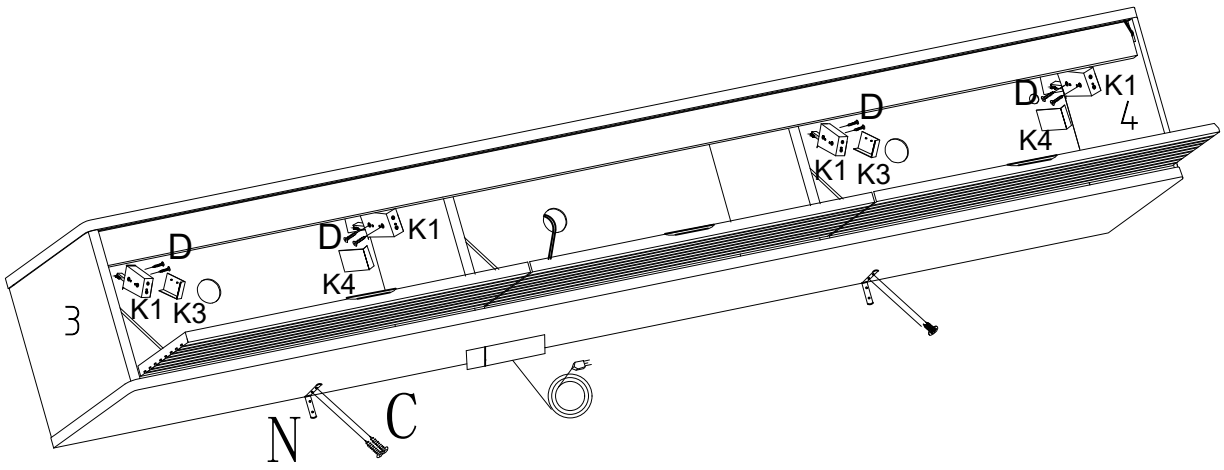


	C×4PCS		D× 8PCS		K3× 2PCS
	N×2PCS		K1× 4PCS		K4× 2PCS

STEP 16

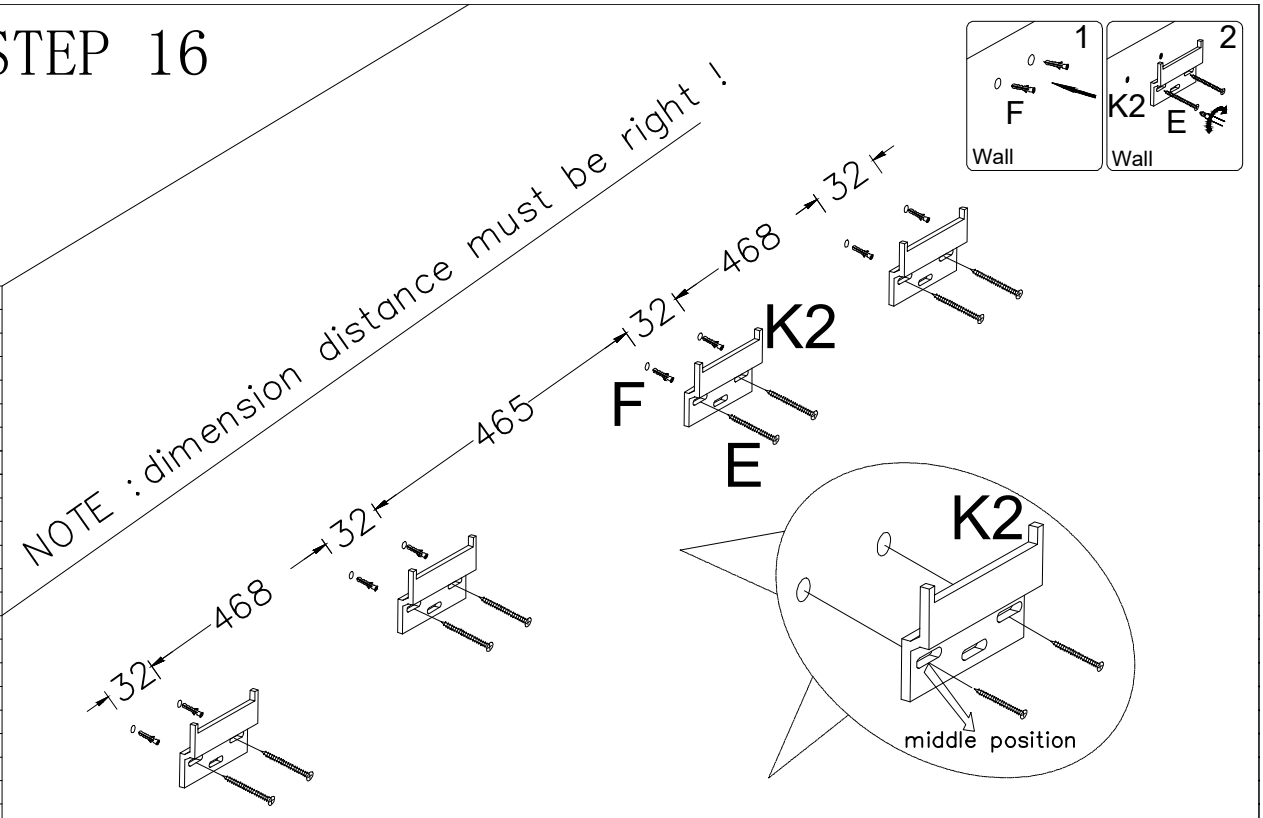


	E× 8PCS		F× 8PCS		K2×4PCS

STEP 17

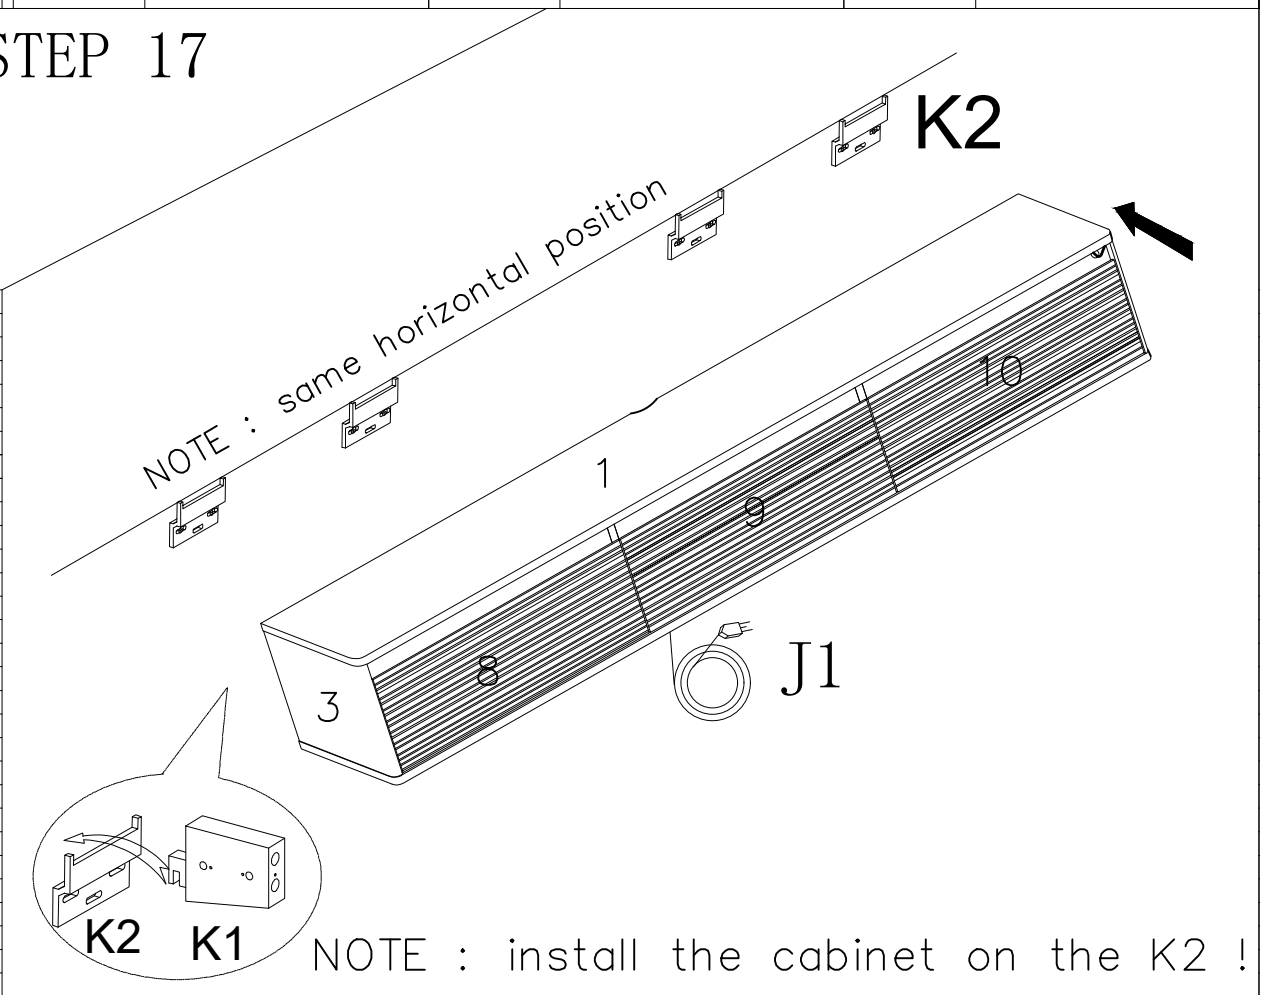

STEP 18

NOTE : dimension distance must be right !

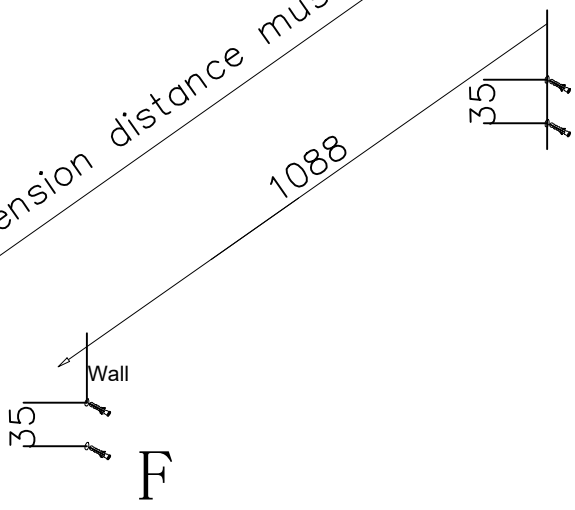


F



F× 4PCS

STEP 19

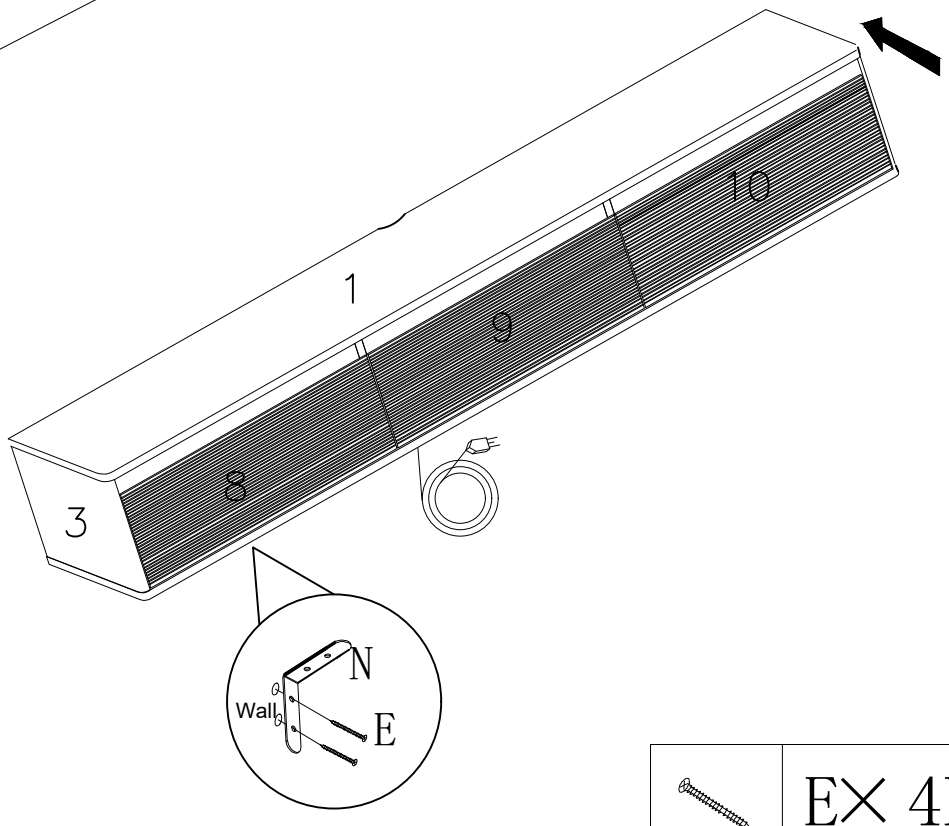

E× 4PCS